


REDSUN

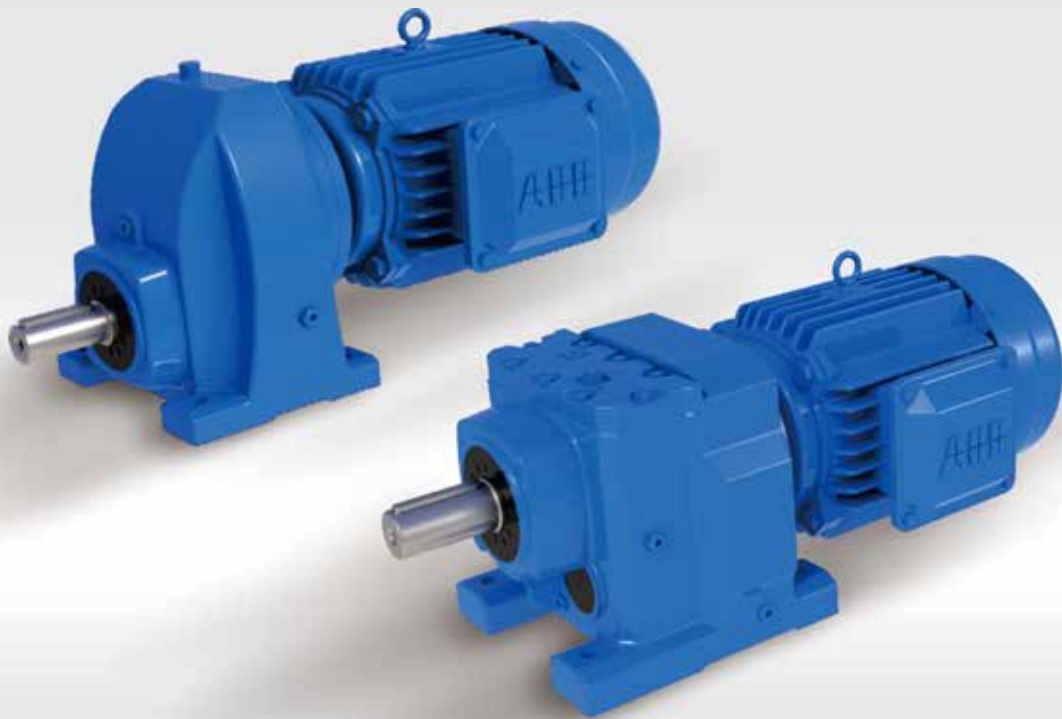


R Series Helical Gear Units

08 / 2015

Note!

1. The structure scheme, appearance diagram and other attached diagrams in sample are examples, there is no strict proportion requirement. If you need exact dimension of certain types, please contact our sales dept.. (The unmarked dimension units are mm).
2. Gear unit has been tested before delivered, users should add lubrication oil before running.
3. We can only refer to the marked oil in the mannul. Actual oil filling level should be the same with the mark on oil immersion lens.
4. Lubrication oil viscosity should be selected according to working conditions and ambient temperature.
5. To prevent accidents, all the rotation parts should be added with protective covers according to safety regulation of the nation and region.
6. The solid shaft input structure gear unit is not equipped with any motor.
7. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.
8. Unless otherwise specified, you will receive the terminal box at 0°.

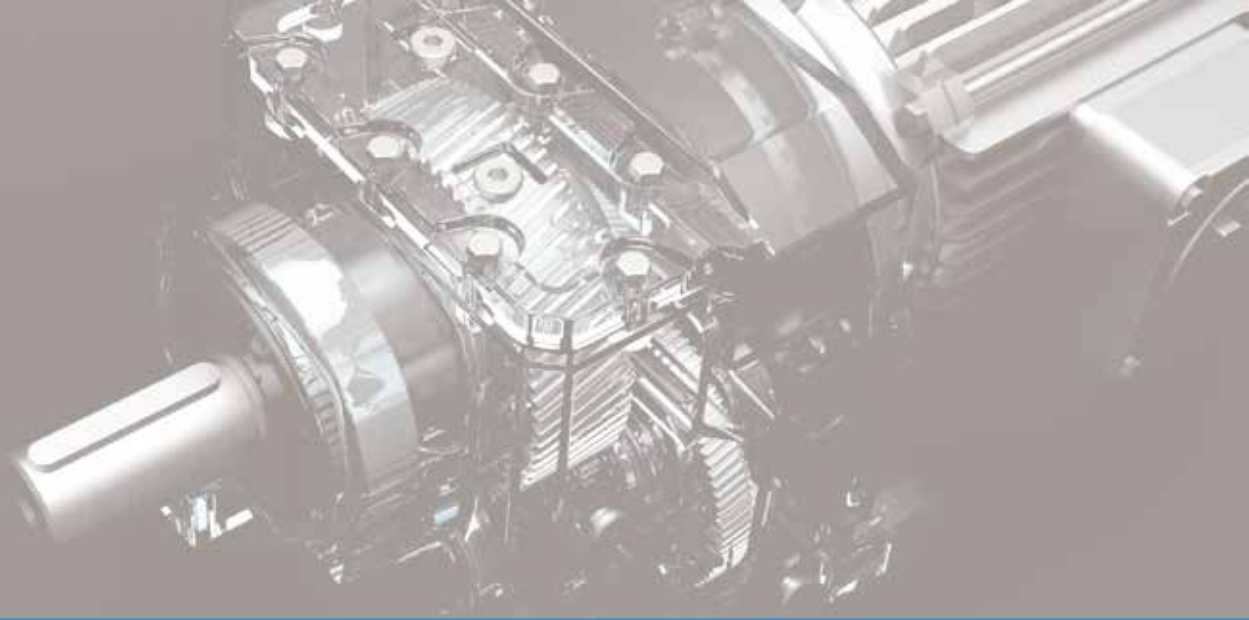

Guidelines for the selection

- ❑ Gear units are designed under the circumstance of steady load, stated operating time per day and a few starting times, but the practical condition will be not as perfect as the designed circumstance. so we must confirm driven machine factor f_1 , prime mover factor f_2 , starting factor f_3 according to actual load type, operating time, starting frequency. let it less than or equal to the service factor f_b of selection table, viz $f_1 \times f_2 \times f_3 \leq f_b$. the needed torque of service machine multiply the service factor ($f_1 \times f_2 \times f_3$) should less than or equal to gear units' permissible torque.

$$\text{Viz } T_N \geq T_2 \times f_1 \times f_2 \times f_3$$

f_1 — Driven machine factor (See table 1)

f_2 — Prime mover factor (See table 2)

f_3 — Start factor (See table 3)

T_2 — The torque required by driven machine

T_N — Gear unit permissible torque (See page 03)

- ❑ We accept the orders of products of special specification, and provide our customer with exclusive design service.
- ❑ Along with the technology advanced etc., the product of the manual of RED SUN will be changed, please forgive.



Service factor:

Table 1		Driven machine factor			f1		
Driven equipment	Daily operating time with load(hour)			Driven equipment	Daily operating time with load(hour)		
	≤ 2	> 2-10	> 10		≤ 2	> 2-10	> 10
Sewage treatment				Conveying machine			
Concentrator(Central Transmission)	-	-	1.2	Bucket conveyer	-	1.4	1.5
Compressed filter	1.0	1.3	1.5	Winch	1.4	1.6	1.6
Flocculator	0.8	1.0	1.3	Hoist	-	1.5	1.8
Aerator	-	1.8	2.0	Belt conveyor≤150kW	1.0	1.2	1.3
Collector	1.0	1.2	1.3	Belt conveyor≥150kW	1.1	1.3	1.4
Vertical,rotary group				Elevators for goods*	-	1.2	1.5
Blended collector	1.0	1.3	1.5	Elevators for customers*	-	1.5	1.8
Concentrator	-	1.1	1.3	Scraper conveyor	-	1.2	1.5
Screw pump	-	1.3	1.5	Automatic ladder	1.0	1.2	1.4
Water wheel machine	-	-	2.0	Rail traveling mechanism	-	1.5	-
Pump				Various frequency device	-	1.8	2.0
Centrifugal pump	1.0	1.2	1.3	Reciprocating compressor	-	1.8	1.9
Volume-down pump				Hoisting mechanism**			
1Piston	1.3	1.4	1.8	Rotary mechanism*		1.4	1.8
>1Piston	1.2	1.4	1.5	Pitching mechanism		1.1	1.4
Dredge				Traveling mechanism		1.6	2.0
Bucket conveyer	-	1.6	1.6	Lifting mechanism		1.1	1.4
Unloading device	-	1.3	1.5	Jibcrane		1.2	1.6
Carterpillar traveling mechanism	1.2	1.6	1.8	Cooling tower			
Bucket digger				Cooling tower fan	-	-	2.0
Be used for picking up	-	1.7	1.7	Fan (Shaft flow and centrifugal type)	-	1.4	1.5
Be used for rough materials	-	2.2	2.2	Food industry			
Chopper	-	2.2	2.2	Sugar production			
Traveling mechanism*	-	1.4	1.8	Sugar-cane cutter*	-	-	1.7
Plate blender	-	1.0	1.0	Sugar crane mill			
Chemical industry				Beet sugar production	-	-	1.7
Extruder	-	-	1.6	Beet masher	-	-	1.2
Paste mixer	-	1.8	1.8	Squeeze machine, mechanical refrigerator, cooking machine	-	-	1.4
Rubber calendar	-	1.5	1.5	Beet cleaner	-	-	1.5
Cooling cylinder	-	1.3	1.4	Paper-making machinery			
Material mixer,be used for				Various kinds***	-	1.8	2.0
Uniform medium	1.0	1.3	1.4	Pulper driving device	Supply goods according to customer requirements		
Non-uniform medium	1.4	1.6	1.7	Centrifugal compressor	-	1.4	1.5
Blender,be used for				Rope way cable car			
Uniform density medium	1.0	1.3	1.5	Delivery ropeway	-	1.3	1.4
Un-uniformed medium	1.2	1.4	1.6	Cableway of shuttle system	-	1.6	1.8
Un-uniformed gas absorption	1.4	1.6	1.8	T rod elevator	-	1.3	1.4
Oven	1.0	1.3	1.5	Continuous cableway	-	1.4	1.6
Centrifugal machine	1.0	1.2	1.3	Cement industry			
Metal processing equipment				Concrete blender	-	1.5	1.5
Plate turnover	1.0	1.0	1.2	Crusher*	-	1.2	1.4
Steel pushing device	1.0	1.2	1.2	Rotary kiln	-	-	2.0
Winding machine	-	1.6	1.6	Tube mill	-	-	2.0
Cooling bed transverse frame	-	1.5	1.5	Powder concentrator	-	1.6	1.6
Roller leveler	-	1.6	1.6	Roller press	-	-	2.0
Roller path							
Continuous	-	1.5	1.5				
Interval	-	2.0	2.0				
Reversing mill	-	1.8	1.8				
Cutter							
Continuous*	-	1.5	1.5				
Crank type*	1.0	1.0	1.0				
Continuous casting driving device	-	1.4	1.4				
Rolling mill							
Reversing cogging mill	-	2.5	2.5				
Reversing plate slab mill	-	2.5	2.5				
Reversing wire mill	-	1.8	1.8				
Reversing thin plate mill	-	2.0	2.0				
Reversing middle thickness plate mill	-	1.8	1.8				
Roll gap adjusting and driving device	0.9	1.0	-				





Table 1 Driven machine factor				f ₁			
Driven equipment	Daily running time with load(hour)			Driven equipment	Daily running time with load(hour)		
	≤ 2	> 2-10	> 10		≤ 2	> 2-10	> 10
Wood industry				Plastics industry			
Barking machine				Miller, compound grinding	1.25	1.25	1.25
Feed drive	1.25	1.25	1.50	Coating, film			
Main drive	1.75	1.75	1.75	Conveying pipe, Pulling rod, thin type			
Conveyor				Pipe type, Pile drawer	1.25	1.25	1.50
Burner, repeating saw	1.25	1.25	1.50	Continuous mixer, Calender	1.50	1.50	1.50
Rotary tower, transit transport	1.50	1.50	1.50	Blow film, to plasticizing			
Main loading, heavy loading	1.50	1.50	1.50	Batch mixer	1.75	1.75	1.75
Main original wood, land base	1.75	1.75	2.00	Rubber industry			
Conveying chain				Continuous strong inner mixer, Mix roller,			
Floor	1.50	1.50	1.50	Batch feeding mixer (except for double sticks)	1.50	1.50	1.50
Green-wood	1.50	1.50	1.75	Refiner, calender			
Cutting Chain				Double roller clamp feeding and mixed miller	1.25	1.25	1.50
Saw transmission, traction	1.50	1.50	1.75	Batch strong inner mixer,			
Peeling barrel	1.75	1.75	2.00	Double stick single groove grain stick	1.75	1.75	1.75
Feed drive				Miller heater, double sticks			
Edging, wood trimmer				Batch feeding mixer			
Planer feed, assorting table,	1.25	1.25	1.50	Wave stick miller	2.00	2.00	2.00
Automatic incline lifting				Generator and exciter	1.00	1.00	1.25
Multi-shaft feed, raw wood	1.75	1.75	1.75	Hammer crusher	1.75	1.75	2.00
Transportation and rotation				Sand miller	1.25	1.25	1.50
Transportation							
Charging tray							
Plywood lathe drive	1.50	1.50	1.75				
Conveying chain, Lifting							

⚠ Note: Determine required power P₂ of the driven equipment:
 *)Determine rated power according to maximum torque.
 **)It's necessary to check thermal capacity.

Prime mover factor

Table 2 Factor for prime mover	f ₂
Electric motors, hydraulic motors, turbines	1.0
Piston engines 4-6 cylinders	1.25
Piston engines 1-3 cylinders	1.5


Table 3 Start factor	f ₃			
f ₃ \ f ₁ x f ₂	1	1.25 - 1.75	2 - 2.75	≥ 3
Starts per hour				
≤ 5	1	1	1	1
6-25	1.2	1.12	1.06	1
26-60	1.3	1.2	1.12	1.06
61-180	1.5	1.3	1.2	1.12
> 180	1.7	1.5	1.3	1.2

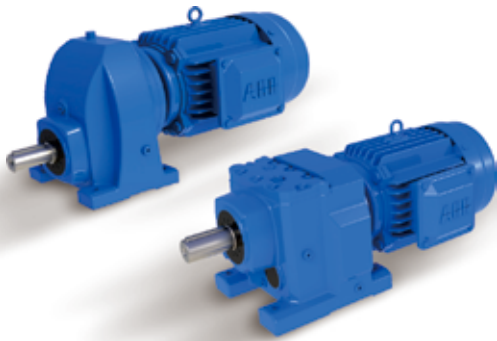

R (RF, RX, RXF) ...Y...


Customers provide the motor by themselves need connected flange

R series gear units are available in the following designs:




R...Y...

Foot-mounted helical gear units



RF...Y...


Flange-mounted helical gear units



RS...


Foot-mounted helical gear units with solid shaft input

R




RFS...

Flange-mounted helical gear units with solid shaft input

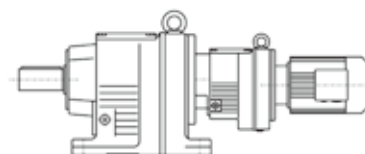


R...R...Y...

Foot-mounted combi-type helical gear units

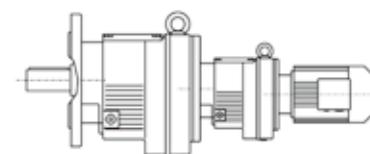


RF...R...Y...

Flange-mounted combi-type helical gear units




RS...R...

Foot-mounted combi-type helical gear units with solid shaft input




RFS...R...

Flange-mounted combi-type gear units with shaft input




RX...Y...

Foot-mounted single-stage helical gear units




RXF...Y...

Flange-mounted single-stage helical gear units



RXS...

Foot-mounted single-stage helical gear units with solid shaft input




RXFS...

Flange-mounted single-stage helical gear units with solid shaft input



Type Designations:

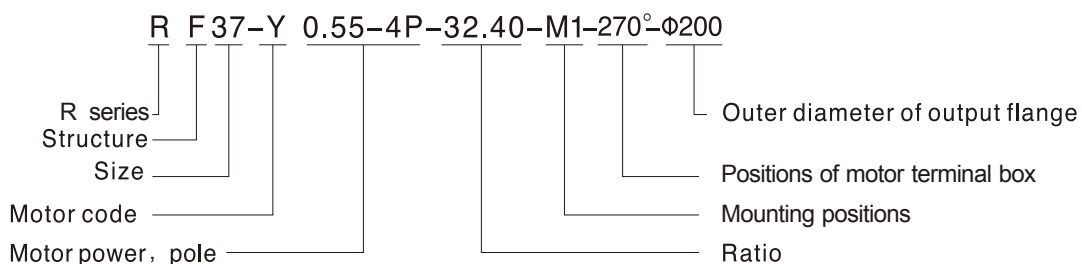

R series:
helical gear units

Structure:
 Foot-mounted (-)
 Flange-mounted F
 Foot-mounted with shaft input S
 Flange-mounted with shaft input FS

Size:
(see selection table)

Motor code:

Common motor	Y(Y2)
Flameproof motor	B
Direct current motor	Z
Brake motor	YEJ
Multi-speed motor	D
Variable frequency motor	YVP
Electromagnetic variable speed motor	YCT
Metallurgy hoisting motor	R
Transduction braking motor	YVPJ
Roller way	G

Motor power, pole:
See selection table


Ratio:
See selection table

Mounting positions:
M1, M2, M3, M4, M5, M5.(See page3)

Positions of motor terminal box:
0°, 90°, 180°, 270°(See page2)

Outer diameter of output flange:
See the chart of mounting dimension (It will be omitted when foot mounting)


Positions of motor terminal box:

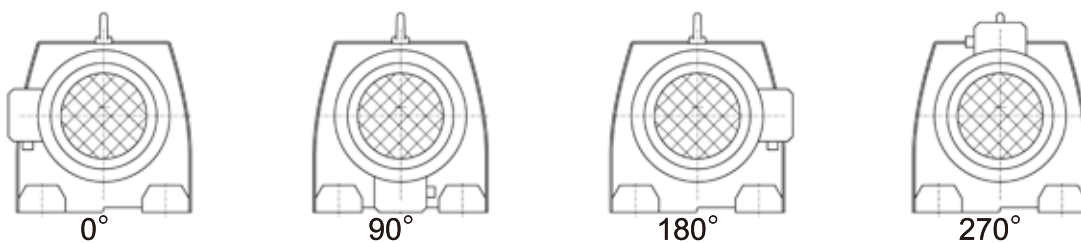

R



Mounting positions

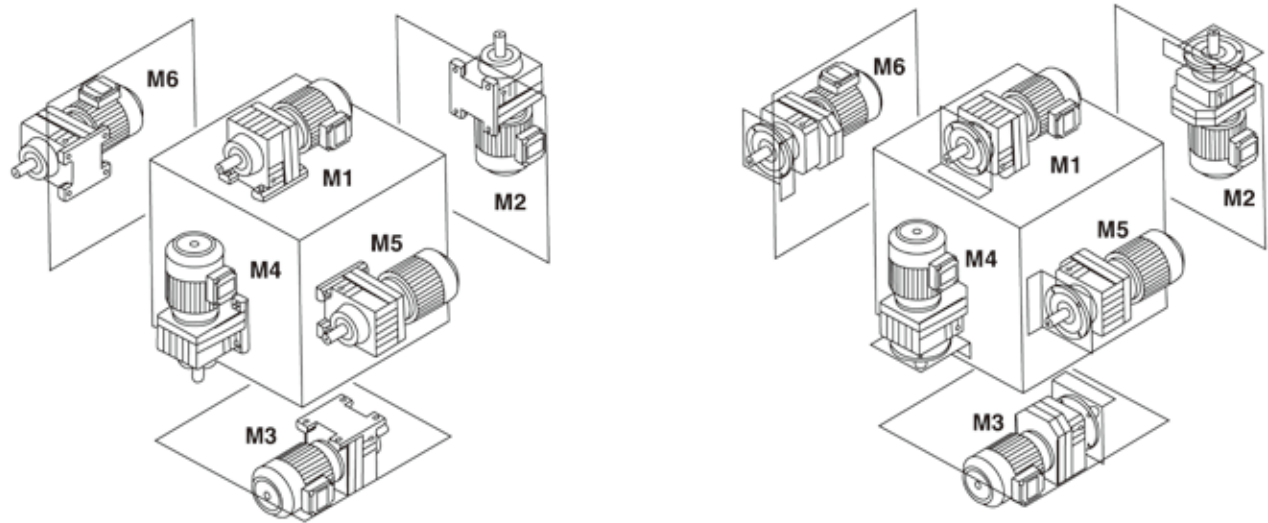

R

Input power rating and permissible torque

Size	17	27	37	47	57	67	77	87	97	107	137	147	167
Structure	R						RF						
Input power rating (kW)	0.18~0.75	0.18~3	0.18~3	0.18~5.5	0.18~7.5	0.18~7.5	0.18~11	0.55~22	0.55~30	2.2~45	5.5~55	11~90	11~160
Ratio	3.83~74.84	3.37~135.09	3.33~134.82	3.83~176.88	4.39~186.89	4.29~199.81	5.21~195.24	5.36~246.54	4.49~289.74	5.06~249.16	5.15~222.60	5.00~163.31	10.24~229.71
Permissible torque (N·m)	85	130	200	300	450	600	820	1550	3000	4300	8000	13000	18000

Size	37	57	67	77	87	97	107	127	157
Structure	RX				RXF				
Input power rating (kW)	0.18~1.1	0.18~5.5	0.18~7.5	1.1~11	3~22	5.5~30	7.5~45	7.5~90	11~132
Ratio	1.62~4.43	1.3~5.5	1.4~6.07	1.42~8.00	1.39~8.65	1.42~8.23	1.44~6.63	1.51~6.2	1.57~6.2
Permissible torque (N·m)	20	70	135	215	400	600	830	1110	1680

Gear unit weight

Size	R17	R27	R37	R47	R57	R67	R77	R87	R97	R107	R137	R147	R167
Weight (kgs)	4	5.5	8.5	10	18	25	36	63	101	153	220	400	700
Gear unit type	RX37	RX57	RX67	RX77	RX87	RX97	RX107	RX127	RX157				
Weight (kgs)	5	8	14	23	39	70	100	150	250				

The marked weight is average value, it has no constraint force.



Oil

Size	Oil level(L)					
	M1 ¹⁾	M2 ¹⁾	M3	M4	M5	M6
R17	0.25	0.6	0.35	0.6	0.35	0.35
R27	0.25/0.4	0.7	0.4	0.7	0.4	0.4
R37	0.3/1	0.9	1	1.1	0.8	1
R47	0.7/1.5	1.6	1.5	1.7	1.5	1.5
R57	0.8/1.7	1.9	1.7	2.1	1.7	1.7
R67	1.1/2.3	2.6/3.5	2.8	3.2	1.8	2
R77	1.2/3	3.8/4.3	3.6	4.3	2.5	3.4
R87	2.3/6	6.7/8.4	7.2	7.7	6.3	6.5
R97	4.6/9.8	11.7/14	11.7	13.4	11.3	11.7
R107	6/13.7	16.3	16.9	19.2	13.2	15.9
R137	10/25	28	29.5	31.5	25	25
R147	15.4/40	46.5	48	52	39.5	41
R167	27/70	82	78	88	66	69

Size	Oil level(L)					
	M1 ¹⁾	M2 ¹⁾	M3	M4	M5	M6
RF17	0.25	0.6	0.35	0.6	0.35	0.35
RF27	0.25/0.4	0.7	0.4	0.7	0.4	0.4
RF37	0.4/1	0.9	1	1.1	0.8	1
RF47	0.75/1.5	1.6	1.5	1.7	1.5	1.5
RF57	0.8/1.7	1.8	1.7	2	1.7	1.7
RF67	1.2/2.5	2.7/3.6	2.7	3.1	1.9	2.1
RF77	1.2/2.6	3.8/4.1	3.3	4.1	2.4	3
RF87	2.4/6	6.8/7.9	7.1	7.7	6.3	6.4
RF97	5.1/10.2	11.9/14	11.2	14	11.2	11.8
RF107	6.3/14.9	15.9	17	19.2	13.1	15.9
RF137	9.5/25	27	29	32.5	25	25
RF147	16.4/42	47	48	52	42	42
RF167	26/70	82	78	88	65	71

Size	Oil level(L)					
	M1	M2	M3	M4	M5	M6
RX37/RXF37	0.45/0.4	0.6	1.1/0.9	1.1/0.9	0.7/0.6	0.7/0.6
RX57/RXF57	0.6/0.5	0.8	1.3/1.1	1.3/1.1	0.9/0.7	0.9/0.7
RX67/RXF67	0.8/0.7	0.8	1.7/1.5	1.9/1.7	1.1/1	1.1/1
RX77/RXF77	1.1/0.9	1.5	2.6/2.4	2.7/2.5	1.6	1.6
RX87/RXF87	1.7/1.6	2.5	4.8/4.9	4.8/4.7	2.9	2.9
RX97/RXF97	2.1	3.4/3.6	7.4/7.1	7	4.8	4.8
RX107/RXF107	3.9/3.1	5.6/5.9	11.6/11.2	11.9/10.5	7.7/7.2	7.7/7.2
RX127/RXF127	5.6/5.9	11.6/11.2	21.9/20.5	22.7/22.2	9.7/9.2	9.7/9.2
RX157/RXF157	11.6/11.2	21.9/20.5	31.3/30.5	32.7/32.2	13.2/12.7	13.2/12.7

Note: Combi-type gear units must be filled with the larger oil volume.



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.18kW						0.18kW					
0.16	9293	8443	1.31			1.6	944	858	0.82		
0.19	8042	7307	1.52			1.7	904	821	0.85		
0.22	7096	6447	1.72			1.8	833	757	0.93		
0.25	6128	5568	1.99	R 147R77	4	1.9	803	730	0.96		
0.29	5300	4815	2.31	RF147R77	4	2.1	739	671	1.04		
0.32	4760	4325	2.57			2.2	711	646	1.08	R 77R37	4
0.38	4038	3669	3.03			2.4	628	571	1.23	RF77R37	4
0.43	3553	3228	3.44			2.5	602	547	1.28		
						2.9	525	477	1.47		
						3.3	469	426	1.64		
						3.8	402	365	1.92		
						4.5	341	310	2.26		
0.16	9668	8784	0.8			2.4	628	571	0.90		
0.19	8232	7479	0.91			2.5	617	561	0.91		
0.22	7057	6412	1.07			2.9	532	483	1.06		
0.24	6421	5834	1.17			3.2	482	438	1.17	R 67R37	4
0.28	5504	5001	1.37	R 137R77	4	3.6	427	388	1.32	RF67R37	4
0.30	5183	4709	1.45	RF137R77	4	4.1	370	336	1.53		
0.32	4803	4364	1.57			4.8	316	287	1.79		
0.35	4323	3928	1.74			5.5	281	255	2.01		
0.40	3868	3514	1.94								
0.42	3674	3338	2.05								
0.47	3224	2929	2.33								
0.31	4881	4435	0.83			3.0	518	471	0.82		
0.36	4260	3870	0.95			3.1	488	443	0.87		
0.42	3634	3302	1.11			3.4	451	410	0.94		
0.46	3299	2997	1.23			3.9	395	359	1.07		
0.53	2885	2621	1.40			4.3	357	324	1.19		
0.62	2479	2252	1.63			4.4	351	319	1.20		
0.68	2246	2041	1.80	R 107R77	4	4.8	319	290	1.33	R 57R37	4
0.71	2169	1971	1.86	RF107R77	4	5.2	294	267	1.44	RF57R37	4
0.77	1995	1813	2.03			5.3	288	262	1.47		
0.88	1747	1587	2.31			5.7	271	246	1.56		
1.0	1529	1389	2.64			5.8	265	241	1.59		
1.1	1338	1216	3.02			6.3	242	220	1.75		
						6.5	237	215	1.79		
						7.4	207	188	2.04		
						8.7	175	159	2.42		
0.51	2996	2722	0.94			4.6	331	301	0.85		
0.52	2937	2668	0.96			5.5	281	255	1.00	R 47R37	4
0.60	2544	2311	1.11			6.1	251	228	1.12	RF47R37	4
0.62	2471	2245	1.14			7.1	215	195	1.31		
0.67	2287	2078	1.23								
0.69	2219	2016	1.27								
0.80	1907	1733	1.48			6.2	249	226	0.8		
0.86	1786	1623	1.58	R 97R57	4	6.9	222	202	0.85		
0.97	1578	1434	1.79	RF97R57	4	7.0	219	199	0.86		
1.2	1328	1207	2.12			7.8	197	179	0.95	R 37R17	4
1.3	1193	1084	2.36			8.9	173	157	1.09	RF37R17	4
1.5	1028	934	2.74			9.1	172	156	1.11		
1.6	966	878	2.92			9.3	165	150	1.14		
1.8	831	755	3.39								
0.79	1912	1737	0.8			9.9	155	141	0.8		
0.80	1907	1733	0.85			10	149	135	0.82		
0.91	1677	1524	0.87			11	136	124	0.90	R 27R17	4
0.93	1639	1489	0.89			12	130	118	0.94	RF27R17	4
1.0	1535	1395	0.95			13	121	110	1.01		
1.1	1356	1232	1.07			14	114	104	1.07		
1.2	1260	1145	1.16	R 87R57	4	15	103	94	1.18		
1.3	1141	1037	1.28	RF87R57	4						
1.5	1025	931	1.42			4.4	371	195.24	2.1		
1.6	972	883	1.50			5.1	317	166.59	2.4		
1.7	883	802	1.65			5.8	277	145.67	2.8	R 77	6
1.8	852	774	1.71			6.1	263	138.39	2.9	RF77	6
						7.0	231	121.42	3.3		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.18kW						0.18kW					
7.1	227	195.24	3.4			11	144	123.91	0.85		
8.3	194	166.59	4.0	R 77	4	13	123	105.49	1.00		
9.5	169	145.67	4.6	RF77	4	15	106	90.96	1.16		
10	161	138.39	4.8			16	99	84.78	1.24		
						19	86	74.11	1.42		
4.3	380	199.81	1.48			20	81	69.47	1.51		
4.6	350	184.07	1.61			23	71	61.30	1.71		
5.4	301	158.14	1.88			25	65	55.87	1.88		
6.2	262	137.67	2.2			29	56	48.17	2.2		
6.6	245	128.97	2.3	R 67	6	31	52	44.90	2.3	R 27	4
7.5	217	113.94	2.6	RF67	6	35	46	39.25	2.7	RF27	4
8.0	201	105.83	2.8			38	44	36.79	2.8		
8.9	182	95.91	3.1			43	39	32.47	3.2		
9.9	164	86.11	3.4			48	35	28.78	3.5		
11	141	74.17	4.0			49	34	28.37	3.6		
12	133	69.75	4.3			53	31	26.09	3.9		
						57	29	24.47	4.2		
7.0	232	199.81	2.4			62	26	22.32	4.6		
7.6	214	184.07	2.6			72	23	19.35	5.3		
8.8	184	158.14	3.1	R 67	4	77	21	18.08	5.7		
10	160	137.67	3.5	RF67	4	89	19	15.63	6.6		
11	150	128.97	3.8			105	16	13.28	7.8		
12	132	113.94	4.3								
13	123	105.83	4.6			37	45	23.13	1.78	R 17	6
						40	41	21.22	1.94	RF17	6
4.5	355	186.89	1.19			47	35	18.06	2.28		
4.9	327	172.17	1.29	R 57	6						
5.7	281	147.92	1.50	RF57	6	19	87	74.84	0.92		
6.6	245	128.77	1.73			22	75	64.52	1.07		
7.0	229	120.63	1.84			23	70	60.14	1.14		
						26	61	52.57	1.31		
7.4	217	186.89	1.95			28	57	49.28	1.39		
8.1	200	172.17	2.1			32	51	43.49	1.58		
9.4	172	147.92	2.5			34	47	40.49	1.70		
11	150	128.77	2.8	R 57	4	39	41	35.40	1.94		
12	140	120.63	3.0	RF57	4	42	39	33.18	2.07		
13	124	106.58	3.4			47	34	29.28	2.3		
14	115	98.99	3.7			54	30	25.96	2.6		
15	104	89.71	4.1			60	27	23.13	2.9		
						63	26	22.06	3.1		
7.9	206	176.88	1.37			66	25	21.22	3.2		
8.5	189	162.94	1.49			77	21	18.06	3.7		
9.9	163	139.99	1.73			89	18	15.57	4.3	R 17	4
11	142	121.87	1.99			96	17	14.52	4.6	RF17	4
12	133	114.17	2.1	R 47	4	110	15	12.69	5.3		
14	117	100.86	2.4	RF47	4	117	14	11.89	5.7		
15	109	93.68	2.6			132	12	10.5	5.9		
16	99	84.90	2.9			149	11	9.31	6.1		
18	89	76.23	3.2			176	10	7.91	6.2		
						184	9	7.55	6.5		
6.9	235	123.66	0.80			197	8	7.04	7.0		
8.1	200	105.28	0.94	R 37	6	226	7.5	6.15	7.2		
9.4	173	90.77	1.09	RF37	6	241	7	5.76	7.3		
10	161	84.61	1.17			273	6	5.09	7.9		
						308	5	4.51	8.4		
10	157	134.82	1.20			363	4.5	3.83	10		
11	144	123.66	1.31								
13	122	105.28	1.54			140	12	6.07	3.4		
15	106	90.77	1.78			164	10	5.18	6.9	RX 67	6
16	98	84.61	1.91	R 37	4	188	9.0	4.53	8.6	RXF67	6
19	86	73.96	2.2	RF37	4	198	8.5	4.30	8.8		
20	81	69.33	2.3								
23	71	61.18	2.6								
25	65	55.76	2.9								
29	56	48.08	3.1								



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.18kW						0.25kW					
229	7.4	6.07	5.5			0.69	3082	2016	0.92		
268	6.3	5.18	11			0.76	2787	1823	1.01		
307	5.5	4.53	13			0.80	2649	1733	1.06		
323	5.2	4.30	14			0.86	2481	1623	1.14		
369	4.6	3.77	18	RX 67	4	0.88	2420	1583	1.17	R 97R57	4
434	3.9	3.20	24	RXF67	4	1.0	2134	1396	1.32	RF97R57	4
481	3.5	2.89	28			1.1	1877	1228	1.50		
547	3.1	2.54	36			1.3	1633	1068	1.73		
579	2.9	2.40	40			1.5	1432	937	1.97		
681	2.5	2.04	51			1.7	1260	824	2.2		
155	11	5.50	3.36			1.9	1127	737	2.5		
168	10	5.07	3.37	RX 57	6	2.2	965	631	2.9		
195	8.6	4.35	7.4	RXF57	6	1.2	1750	1145	0.83		
224	7.5	3.79	8.5			1.3	1585	1037	0.92		
253	6.7	5.50	5.50			1.5	1423	931	1.02		
274	6.1	5.07	5.51			1.6	1350	883	1.08		
320	5.3	4.35	12			1.7	1226	802	1.19		
367	4.6	3.79	14			1.8	1183	774	1.23	R 87R57	4
392	4.3	3.55	15			2.0	1044	683	1.40	RF87R57	4
443	3.8	3.14	16	RX 57	4	2.3	916	599	1.59		
478	3.5	2.91	18	RXF57	4	2.6	803	525	1.82		
527	3.2	2.64	20			3.1	694	454	2.1		
586	2.9	2.37	23			5.2	408	267	3.6		
681	2.5	2.04	26			2.4	873	571	0.88		
724	2.3	1.92	28			2.5	836	547	0.92		
842	2.0	1.65	32			2.9	729	477	1.06		
426	4	3.26	3.80	RX 37	4	3.3	651	426	1.18	R 77R37	4
527	3	2.64	4.69	RXF37	4	3.8	556	364	1.39	RF77R37	4
0.25kW						0.25kW					
0.14	14894	9743	0.82			4.5	477	312	1.62		
0.16	12907	8443	0.95			4.6	474	310	1.63		
0.19	11170	7307	1.09			5.6	379	248	2.03		
0.22	9855	6447	1.24	R 147R77	4	6.3	335	219	2.3		
0.25	8512	5568	1.44	RF147R77	4	3.6	593	388	0.95		
0.29	7361	4815	1.66			3.9	549	359	1.03		
0.32	6612	4325	1.85			4.1	514	336	1.10		
0.38	5609	3669	2.18			4.5	474	310	1.19		
0.43	4935	3228	2.48			4.8	439	287	1.29		
0.49	4331	2833	2.82			5.3	404	264	1.40		
0.24	8918	5834	0.84			5.5	390	255	1.45	R 67R37	4
0.28	7645	5001	0.98			5.9	359	235	1.57	RF67R37	4
0.30	7199	4709	1.04			6.1	350	229	1.61		
0.32	6671	4364	1.13			6.9	307	201	1.84		
0.35	6142	4018	1.22			7.1	298	195	1.89		
0.37	6005	3928	1.25	R 137R77	4	7.7	277	181	2.0		
0.40	5372	3514	1.40	RF137R77	4	8.1	263	172	2.15		
0.42	5103	3338	1.47			9.0	235	154	2.40		
0.47	4478	2929	1.68			4.3	495	324	0.85		
0.52	4063	2658	1.85			4.4	488	319	0.87		
0.58	3687	2414	2.0			4.8	443	290	0.95		
0.67	3169	2073	2.4			5.2	408	267	1.04		
0.76	2811	1839	2.7			5.3	401	262	1.06		
0.99	2136	1397	3.5			5.7	376	246	1.12	R 57R37	4
1.1	1874	1226	4.0			5.8	368	241	1.15	RF57R37	4
0.46	4609	3015	0.88			6.3	336	220	1.26		
0.71	3013	1971	1.34			6.5	329	215	1.29		
0.77	2772	1813	1.46			7.6	280	183	1.51		
0.88	2426	1587	1.67			8.6	246	161	1.72		
1.0	2123	1389	1.90	R 107R77	4	10	211	138	2.0		
1.1	1859	1216	2.2	RF107R77	4	6.1	349	228	0.81		
1.5	1417	927	2.9			7.1	298	195	0.95	R 47R37	4
1.7	1241	812	3.3			7.6	278	182	1.01	RF47R37	4
						9.0	235	154	1.20		

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.25kW						0.25kW					
8.9	238	156	0.79			7.4	308	186.89	1.37		
9.3	229	150	0.82			8.1	284	172.17	1.49		
10	206	135	0.91			9.4	244	147.92	1.73		
11	194	127	0.97	R 37R17	4	11	212	128.77	1.99	R 57	4
12	168	110	1.12	RF37R17	4	12	199	120.63	2.1	RF57	4
13	159	104	1.18			13	176	106.58	2.4		
14	144	94	1.31			14	163	98.99	2.6		
15	138	90	1.37			15	148	89.71	2.9		
						17	133	80.55	3.2		
						20	114	69.23	3.7		
2.2	1029	289.60	2.7			7.9	292	176.88	0.97		
2.5	913	256.89	3.1	R 97	8	8.5	269	162.94	1.05		
2.7	856	240.83	3.3	RF97	8	9.9	231	139.99	1.22		
3.0	767	215.94	3.7			11	201	121.87	1.40		
						12	188	114.17	1.50		
2.6	876	246.54	1.66			14	166	100.86	1.70	R 47	4
3.0	769	216.54	1.89	R 87	8	15	154	93.68	1.83	RF47	4
3.1	731	205.71	1.99	RF87	8	16	140	84.90	2.0		
3.5	646	181.77	2.3			18	126	76.23	2.2		
						20	113	68.54	2.5		
3.9	592	166.59	1.30			22	106	64.21	2.7		
4.4	518	145.67	1.49	R 77	8	25	94	56.73	3.0		
4.7	492	138.39	1.57	RF77	8	26	87	52.69	3.2		
5.3	431	121.42	1.79			29	79	47.75	3.6		
4.4	526	195.24	1.46			10	222	134.82	0.85		
5.1	449	166.59	1.72	R 77	6	11	204	123.66	0.92		
5.8	393	145.67	1.96	RF77	6	13	175	105.28	1.08		
						15	150	90.77	1.26		
7.1	322	195.24	2.4			16	140	84.61	1.35		
8.3	275	166.59	2.8	R 77	4	19	122	73.96	1.54	R 37	4
9.5	240	145.67	3.2	RF77	4	20	114	69.33	1.64	RF37	4
10	228	138.39	3.4			23	101	61.18	1.86		
11	200	121.42	3.8			25	92	55.76	2.0		
						29	79	48.08	2.4		
4.1	562	158.14	1.00			31	74	44.81	2.5		
4.7	489	137.67	1.15	R 67	8	35	65	39.17	2.9		
5.0	458	128.97	1.23	RF67	8	38	61	36.72	3.1		
5.7	405	113.94	1.39			43	53	32.40	3.5		
4.3	539	199.81	1.05			16	140	84.78	0.87		
4.6	496	184.07	1.14			19	122	74.11	1.00		
5.4	426	158.14	1.32	R 67	6	20	115	69.47	1.07		
6.2	371	137.67	1.52	RF67	6	23	101	61.30	1.21		
6.6	348	128.97	1.62			25	92	55.87	1.33		
7.5	307	113.94	1.84			29	79	48.17	1.54		
8.0	285	105.83	1.98			31	74	44.90	1.65		
						35	65	39.25	1.89		
7.0	329	199.81	1.71			38	61	36.79	2.0		
7.6	304	184.07	1.86			43	54	32.47	2.3		
8.8	261	158.14	2.2			48	48	28.78	2.5		
10	227	137.67	2.5	R 67	4	49	47	28.37	2.6		
11	213	128.97	2.7	RF67	4	53	43	26.09	2.8		
12	188	113.94	3.0			57	40	24.47	3.0	R 27	4
13	175	105.83	3.2			62	37	22.32	3.3	RF27	4
14	158	95.91	3.6			72	32	19.35	3.8		
16	142	86.11	4.0			77	30	18.08	4.1		
						89	26	15.63	4.7		
4.5	504	186.89	0.84			105	22	13.28	5.6		
4.9	464	172.17	0.91			117	20	11.86	6.2		
5.7	399	147.92	1.06	R 57	6	137	17	10.13	6.9		
6.6	347	128.77	1.22	RF57	6	148	16	9.41	7.4		
7.0	325	120.63	1.30			170	14	8.16	8.1		
8.0	287	106.58	1.47			182	13	7.63	8.4		
8.6	267	98.99	1.58			211	11	6.59	9.2		
						248	9.0	5.60	10		
						278	8.2	5.00	11		
						326	7.0	4.27	12		
						348	7.0	4.00	12		
						412	6.0	3.37	13		



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.25kW						0.37kW					
26	87	52.57	0.92			0.19	16532	7307	0.80		
28	81	49.28	0.98			0.22	14586	6447	0.84		
32	72	43.49	1.11			0.25	12597	5568	0.97		
34	67	40.49	1.20			0.29	10894	4815	1.12	R 147R77	4
39	58	35.40	1.37			0.32	9785	4325	1.25	RF147R77	4
42	55	33.18	1.46			0.38	8301	3669	1.47		
47	48	29.28	1.65			0.43	7303	3228	1.67		
54	43	25.96	1.87			0.49	6410	2833	1.91		
60	38	23.13	2.1								
63	36	22.06	2.2			0.32	9873	4364	0.76		
66	35	21.22	2.3			0.35	8887	3928	0.85		
77	30	18.06	2.7	R 17	4	0.40	7950	3514	0.95		
89	26	15.57	3.1	RF17	4	0.42	7552	3338	1.00		
96	24	14.52	3.3			0.47	6627	2929	1.13		
110	21	12.69	3.8			0.52	6014	2658	1.25		
117	20	11.89	4.1			0.56	5620	2484	1.34	R 137R77	4
132	17	10.5	4.2			0.58	5457	2412	1.38	RF137R77	4
149	15	9.31	4.4			0.62	5072	2242	1.48		
176	13	7.91	4.5			0.67	4690	2073	1.60		
184	12	7.55	4.7			0.76	4161	1839	1.81		
197	11	7.04	5.0			0.99	3161	1397	2.4		
226	10	6.15	5.2			1.1	2774	1226	2.7		
241	9	5.76	5.3			1.3	2466	1090	3.0		
273	8	5.09	5.7			1.5	2152	951	3.5		
308	7	4.51	6.1								
363	6	3.83	6.7								
140	16	6.07	2.5			0.68	4618	2041	0.88		
164	14	5.18	4.9	RX 67	6	0.71	4459	1971	0.91		
188	13	4.53	6.2	RXF67	6	0.77	4102	1813	0.99		
198	12	4.30	6.4			0.83	3785	1673	1.07		
						0.88	3591	1587	1.13	R 107R77	4
						0.91	3464	1531	1.17	RF107R77	4
229	10	6.07	4.0			1.0	3145	1390	1.29		
268	9	5.18	8.1			1.1	2751	1216	1.47		
307	8	4.53	10			1.2	2701	1194	1.50		
323	7	4.30	10			1.3	2360	1043	1.71		
369	6	3.77	13	RX 67	4	1.5	2097	927	1.93		
434	5.5	3.20	17	RXF67	4	1.7	1837	812	2.2		
481	5	2.89	20								
547	4.5	2.54	26			0.97	3244	1434	0.87		
579	4	2.40	29			1.0	3158	1396	0.89		
681	3	2.04	37			1.1	2778	1228	1.02		
						1.2	2731	1207	1.03		
155	15	5.50	2.4			1.3	2453	1084	1.15		
168	14	5.07	2.4	RX 57	6	1.4	2416	1068	1.17	R 97R57	4
195	12	4.35	5.3	RXF57	6	1.5	2120	937	1.33	RF97R57	4
224	10	3.79	6.2			1.7	1864	824	1.51		
						1.9	1667	737	1.69		
253	9.3	5.50	4.0			2.2	1428	631	1.98		
274	8.5	5.07	4.0			3.2	973	430	2.9		
320	7.3	4.35	9.0			3.7	857	379	3.3		
367	6.4	3.79	10			4.1	760	336	3.7		
392	6.0	3.55	11								
443	5.3	3.14	12	RX 57	4	1.7	1814	802	0.80		
478	4.9	2.91	13	RXF57	4	1.8	1751	774	0.83		
527	4.4	2.64	15			1.9	1706	754	0.85		
586	4.0	2.37	16			2.0	1545	683	0.94		
681	3.4	2.04	19			2.1	1468	649	0.99		
724	3.2	1.92	20			2.3	1355	599	1.08		
842	2.8	1.65	23			2.5	1217	538	1.20	R 87R57	4
						2.6	1188	525	1.23	RF87R57	4
						2.9	1068	472	1.36		
370	6	3.76	2.37			3.1	1027	454	1.42		
426	5.5	3.26	2.73			3.5	905	400	1.61		
456	5	3.05	2.92			3.9	817	361	1.78		
527	4.5	2.64	3.38	RX 37	4	5.2	604	267	2.4		
621	4	2.24	3.98	RXF37	4	5.9	532	235	2.7		
695	3.5	2.00	4.46								
813	3	1.71	5.21								
869	2.5	1.60	5.57								

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.37kW						0.37kW					
3.3	964	426	0.80			6.6	503	128.77	0.84		
3.8	824	364	0.94			7.0	471	120.63	0.90	R 57	6
4.3	740	327	1.04			8.0	416	106.58	1.02	RF57	6
4.5	701	310	1.10			8.6	387	98.99	1.09		
5.6	561	248	1.37	R 77R37	4	7.4	447	186.89	0.95		
6.3	495	219	1.56	RF77R37	4	8.1	411	172.17	1.03		
7.4	425	188	1.81			9.4	353	147.92	1.20		
8.6	367	162	2.1			11	308	128.77	1.37		
9.8	321	142	2.4			12	288	120.63	1.47		
4.8	649	287	0.87			13	255	106.58	1.66	R 57	4
5.5	577	255	0.98	R 67R37	4	14	237	98.99	1.79	RF57	4
6.1	518	229	1.09	RF67R37	4	15	214	89.71	1.97		
7.1	441	195	1.28			17	192	80.55	2.2		
2.5	1323	256.89	2.1			20	165	69.23	2.6		
2.7	1240	240.83	2.3	R 97	8	21	155	64.85	2.7		
3.0	1112	215.94	2.5	RF97	8	24	137	57.29	3.1		
3.5	958	185.97	2.9			26	127	53.22	3.3		
2.9	1132	289.60	2.5			29	115	48.23	3.7		
3.3	1004	256.89	2.8	R 97	6	9.9	335	139.99	0.84		
3.5	941	240.83	3.0	RF97	6	11	291	121.87	0.97		
3.9	844	215.94	3.3			12	273	114.17	1.03		
3.0	1115	216.54	1.31			14	241	100.86	1.17		
3.1	1059	205.71	1.38	R 87	8	15	224	93.68	1.26		
3.5	936	181.77	1.6	RF87	8	16	203	84.90	1.39		
3.4	963	246.54	1.51			18	182	76.23	1.55		
3.9	846	216.54	1.72			20	164	68.54	1.72		
4.1	804	205.71	1.81	R 87	6	22	153	64.21	1.84	R 47	4
4.7	710	181.77	2.1	RF87	6	25	136	56.73	2.1	RF47	4
5.5	607	155.34	2.4			26	126	52.69	2.2		
6.0	556	142.41	2.6			29	114	47.75	2.5		
4.4	750	145.67	1.03			32	102	42.87	2.6		
4.7	713	138.39	1.08	R 77	8	38	88	36.93	2.7		
5.3	625	121.42	1.23	RF77	8	40	83	34.73	2.8		
5.1	651	166.59	1.18			41	81	33.79	3.2		
5.8	569	145.67	1.35	R 77	6	45	74	31.12	3.4		
6.1	541	138.39	1.43	RF77	6	52	64	26.74	4.4		
7.1	467	195.24	1.65			60	56	23.28	5.1		
8.3	398	166.59	1.94			64	52	21.81	5.4		
9.5	348	145.67	2.2			15	217	90.77	0.87		
10	331	138.39	2.3	R 77	4	16	202	84.61	0.93		
11	290	121.42	2.7	RF77	4	19	177	73.96	1.06		
13	246	102.99	3.1			20	166	69.33	1.13		
15	222	92.97	3.47			23	146	61.18	1.29		
5.4	618	158.14	0.91			25	133	55.76	1.41		
6.2	538	137.67	1.05	R 67	6	29	115	48.08	1.64		
6.6	504	128.97	1.12	RF67	6	31	107	44.81	1.76		
7.5	445	113.94	1.27			35	94	39.17	2.0		
7.0	477	199.81	1.18			38	88	36.72	2.1		
7.6	440	184.07	1.28			43	77	32.40	2.4		
8.8	378	158.14	1.49			48	69	28.73	2.7		
10	329	137.67	1.71			49	68	28.32	2.8	R 37	4
11	308	128.97	1.83			53	62	26.03	2.9	RF37	4
12	272	113.94	2.1	R 67	4	57	58	24.42	3.2		
13	253	105.83	2.2	RF67	4	62	53	22.27	3.5		
14	229	95.91	2.5			72	46	19.31	4.1		
16	206	86.11	2.7			77	43	18.05	4.4		
19	177	74.17	3.2			89	38	15.60	4.9		
20	167	69.75	3.4			105	32	13.25	5.5		
23	146	61.26	3.9			117	29	11.83	6.0		
24	136	56.89	4.1								



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.37kW						0.37kW					
23	146	61.30	0.83			253	13.7	5.50	2.7		
25	134	55.87	0.92			274	12.6	5.07	2.7		
29	115	48.17	1.06			320	10.8	4.35	5.9		
31	107	44.90	1.14			367	9.4	3.79	6.9		
35	94	39.25	1.30			392	8.8	3.55	7.3		
38	88	36.79	1.39			443	7.8	3.14	7.8	RX 57	4
43	78	32.47	1.57	R 27	4	478	7.2	2.91	8.7	RXF57	4
48	69	28.78	1.78	RF27	4	527	6.6	2.64	9.9		
49	68	28.37	1.80			586	5.9	2.37	11		
53	62	26.09	1.96			681	5.1	2.04	13		
57	58	24.47	2.1			724	4.8	1.92	14		
62	53	22.32	2.3			842	4.1	1.65	16		
72	46	19.35	2.6								
77	43	18.08	2.8			426	8.1	3.26	1.85		
89	37	15.63	3.3			456	7.6	3.05	1.97		
105	32	13.28	3.9			527	6.6	2.64	2.28	RX 37	4
						621	5.6	2.24	2.69	RXF37	4
						695	5.0	2.00	3.01		
						813	4.3	1.71	3.52		
						869	4.0	1.60	3.76		
0.55kW						0.55kW					
						0.23	20411	6069	0.83	R 167R97	4
						0.26	18157	5399	0.93	RF167R97	4
						0.30	15837	4709	1.07		
						0.33	14065	4182	1.20		
						0.29	16193	4815	0.75		
						0.32	14545	4325	0.84		
						0.38	12339	3669	0.99		
						0.43	10856	3228	1.13		
						0.49	9528	2833	1.28		
						0.54	8593	2555	1.42	R 147R77	4
						0.63	7436	2211	1.64	RF147R77	4
						0.71	6561	1951	1.86		
						0.82	5734	1705	2.1		
						0.90	5166	1536	2.4		
						1.05	4470	1329	2.7		
						1.19	3921	1166	3.1		
						0.52	8939	2658	0.84		
						0.56	8354	2484	0.9		
						0.58	8112	2412	0.93		
						0.67	6972	2073	1.08		
						0.76	6185	1839	1.22	R 137R77	4
						0.87	5374	1598	1.40	RF137R77	4
						0.99	4698	1397	1.60		
						1.1	4123	1226	1.82		
						1.3	3666	1090	2.1		
						1.5	3198	951	2.4		
						1.7	2795	831	2.7		
						1.0	4675	1390	0.86		
						1.1	4090	1216	0.99		
						1.2	4016	1194	1.01		
						1.3	3686	1095	1.10		
						1.4	3508	1043	1.15	R 107R77	4
						1.5	3118	927	1.30	RF107R77	4
						1.6	2986	888	1.35		
						1.7	2731	812	1.48		
						1.8	2647	787	1.53		
						2.0	2327	692	1.74		
						2.3	2035	605	1.99		

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.55kW						0.55kW					
1.5	3151	937	0.89			8.8	562	158.14	1.00		
1.7	2771	824	1.02			10	489	137.67	1.15		
1.9	2479	737	1.14			11	458	128.97	1.23		
2.2	2122	631	1.33			12	405	113.94	1.39		
2.5	1883	560	1.50	R 97R57	4	13	376	105.83	1.50	R 67	4
2.9	1628	484	1.73	RF97R57	4	14	341	95.91	1.66	RF67	4
3.2	1446	430	1.95			16	306	86.11	1.84		
3.7	1275	379	2.2			19	263	74.17	2.1		
4.1	1130	336	2.5			20	248	69.75	2.3		
4.7	995	296	2.8			23	218	61.26	2.6		
5.6	837	249	3.4			24	202	56.89	2.8		
2.6	1766	525	0.83			12	428	120.63	0.99		
2.9	1587	472	0.92			13	379	106.58	1.12		
3.1	1527	454	0.95			14	352	98.99	1.20		
3.5	1345	400	1.08	R 87R57	4	15	319	89.71	1.33		
3.6	1332	396	1.09	RF87R57	4	17	286	80.55	1.48		
3.9	1214	361	1.20			20	246	69.23	1.72		
4.0	1180	351	1.23			21	230	64.85	1.84	R 57	4
4.6	1026	305	1.42			24	203	57.29	2.1	RF57	4
5.1	925	275	0.83			26	189	53.22	2.2		
5.9	794	236	0.97	R 77R37	4	29	171	48.23	2.5		
6.3	743	221	1.04	RF77R37	4	32	154	43.30	2.8		
7.8	599	178	1.29			37	132	37.30	3.2		
2.6	1893	256.89	1.50	R 97	8	40	125	35.07	3.4		
2.8	1775	240.83	1.59	RF97	8	53	93	26.31	4.5		
3.1	1591	215.94	1.77			56	89	24.99	4.8		
2.9	1682	289.60	1.68			63	78	21.93	5.4		
3.3	1492	256.89	1.90	R 97	6	75	66	18.60	6.4		
3.5	1399	240.83	2.0	RF97	6	15	333	93.68	0.85		
3.9	1254	215.94	2.2			16	302	84.90	0.94		
4.8	1029	289.60	2.7			18	271	76.23	1.04		
5.4	912	256.89	3.1	R 97	4	20	243	68.54	1.16		
5.8	855	240.83	3.3	RF97	4	22	228	64.21	1.24		
6.4	767	215.94	3.7			25	202	56.73	1.40		
3.6	1375	246.54	1.06			26	187	52.69	1.51	R 47	4
4.1	1208	216.54	1.21	R 87	6	29	170	47.75	1.66	RF47	4
4.3	1148	205.71	1.27	RF87	6	32	152	42.87	1.85		
4.9	1014	181.77	1.44			38	131	36.93	2.1		
5.7	867	155.34	1.68			40	123	34.73	2.3		
5.6	876	246.54	1.66			47	106	29.88	2.7		
6.4	769	216.54	1.89			52	95	26.74	3.0		
6.8	731	205.71	2.0			60	83	23.28	3.4		
7.6	646	181.77	2.3	R 87	4	64	77	21.81	3.6		
8.9	552	155.34	2.6	RF87	4	23	217	61.18	0.87		
9.8	506	142.41	2.9			25	198	55.76	0.95		
11	444	124.97	3.3			29	171	48.08	1.10		
12	421	118.43	3.5			31	159	44.81	1.18		
13	368	103.65	4.0			35	139	39.17	1.35		
8.3	592	166.59	1.30			38	130	36.72	1.44		
9.5	517	145.67	1.49			43	115	32.40	1.63		
10	492	138.39	1.57			48	102	28.73	1.84	R 37	4
11	431	121.42	1.79			57	87	24.42	2.2	RF37	4
13	366	102.99	2.1	R 77	4	62	79	22.27	2.4		
15	330	92.97	2.3	RF77	4	72	69	19.31	2.7		
17	291	81.80	2.7			77	64	18.05	2.9		
18	274	77.24	2.8			89	55	15.60	3.4		
21	234	65.77	3.3			105	47	13.25	4.0		
						117	42	11.83	4.5		



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.55kW						0.55kW					
35	139	39.25	0.88			320	16	4.35	4.0		
38	131	36.79	0.94			367	14	3.79	4.6		
43	115	32.47	1.06			392	13	3.55	4.9		
48	102	28.78	1.20			443	12	3.14	5.3		
57	87	24.47	1.41			478	11	2.91	5.8	RX 57	4
62	79	22.32	1.54			527	10	2.64	6.6	RXF57	4
72	69	19.35	1.78			586	8.8	2.37	7.4		
77	64	18.08	1.90			681	7.6	2.04	8.6		
89	56	15.63	2.2	R 27	4	724	7.1	1.92	9.1		
105	47	13.28	2.6	RF27	4	842	6.1	1.65	11		
117	42	11.86	2.9			939	5.8	1.48	12		
137	36	10.13	3.2			1069	4.8	1.30	12		
148	33	9.41	3.4								
170	29	8.16	3.8			426	12	3.26	1.24		
182	27	7.63	3.9			456	11	3.05	1.33		
211	23	6.59	4.3			527	10	2.64	1.53	RX 37	4
248	20	5.60	4.7			621	8.3	2.24	1.81	RXF37	4
278	18	5.00	5.0			695	7.4	2.00	2.03		
326	15	4.27	5.4			813	6.3	1.71	2.37		
348	14	4.00	5.6			869	5.9	1.60	2.53		
412	12	3.37	6.2								
						0.75kW					
77	64	18.06	1.25			0.30	21596	4709	0.8		
89	55	15.57	1.44			0.33	19179	4182	0.88	R 167R97	4
96	52	14.52	1.55			0.52	12185	2657	1.39	RF167R97	4
110	45	12.69	1.77			0.60	10699	2333	1.58		
117	42	11.89	1.89			0.67	9562	2085	1.77		
132	37	10.50	1.9			0.95	6677	1456	2.5		
149	33	9.31	2.0	R 17	4						
161	31	8.63	2.1	RF17	4	0.43	14804	3228	0.83		
176	28	7.91	2.2			0.49	12992	2833	0.94		
184	27	7.55	2.2			0.54	11717	2555	1.04		
197	25	7.04	2.3			0.63	10140	2211	1.21	R 147R77	4
226	22	6.15	2.4			0.71	8947	1951	1.37	RF147R77	4
241	20	5.76	2.6			0.82	7819	1705	1.56		
273	18	5.09	2.7			0.90	7044	1536	1.73		
308	16	4.51	2.8			1.0	6095	1329	2.0		
363	14	3.83	3.1			1.2	5347	1166	2.3		
171	30	5.18	2.3			0.67	9507	2073	0.79		
195	26	4.53	2.9	RX 67	6	0.7	8544	1863	0.88		
206	25	4.30	3.0	RXF67	6	0.76	8434	1839	0.89		
235	22	3.77	3.7			0.87	7287	1589	1.03		
268	19	5.18	3.7			0.9	7273	1586	1.03	R 137R77	4
307	17	4.53	4.6			0.99	6407	1397	1.17	RF137R77	4
323	16	4.30	4.7			1.0	6237	1360	1.21		
369	14	3.77	5.9			1.1	5632	1228	1.34		
434	12	3.20	7.9			1.2	5623	1226	1.34		
481	11	2.89	9.3	RX 67	4	1.3	4999	1090	1.50		
547	9.4	2.54	12	RXF67	4	1.5	4361	951	1.72		
579	8.9	2.40	13			1.7	3811	831	1.97		
681	7.6	2.04	17			1.9	3348	730	2.2		
747	6.9	1.86	17								
863	6.0	1.61	18			1.3	5022	1095	0.80		
203	25	4.35	2.5			1.4	4783	1043	0.85		
234	22	3.79	2.9			1.5	4251	927	0.95	R 107R77	4
249	21	3.55	3.1	RX 57	6	1.6	4072	888	0.99	RF107R77	4
282	18	3.14	3.3	RXF57	6	1.7	3724	812	1.09		
304	17	2.91	3.7			1.8	3609	787	1.12		
						3.9	1637	357	2.5		
						4.4	1435	313	2.8		
						2.2	2894	631	0.97		
						2.5	2568	560	1.10		
						2.9	2220	484	1.27	R 97R57	4
						3.2	1972	430	1.43	RF97R57	4
						3.7	1738	379	1.62		
						4.1	1541	336	1.83		
						4.7	1357	296	2.1		
						5.6	1142	249	2.5		

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.75kW						0.75kW					
3.5	1816	396	0.80			13	516	106.58	0.82		
3.9	1656	361	0.91			14	479	98.99	0.88		
4.0	1610	351	1.04			15	435	89.71	0.97		
4.6	1399	305	1.19	R 87R57	4	17	390	80.55	1.08		
4.7	1376	300	1.35	RF87R57	4	20	335	69.23	1.26		
5.2	1224	267	1.70			21	314	64.85	1.35		
5.4	1174	256	2.0			24	277	57.29	1.52	R 57	4
5.9	1078	235	2.4			26	258	53.22	1.64	RF57	4
						29	234	48.23	1.81		
2.8	2445	245.50	1.65	R 107	8	32	210	43.30	2.0		
3.0	2259	226.11	1.81	RF107	8	37	181	37.30	2.3		
3.4	1995	200.87	2.0			40	170	35.07	2.5		
						46	146	30.18	2.9		
3.1	2138	215.94	1.32	R 97	8	52	131	26.97	3.2		
3.7	1841	185.97	1.53	RF97	8	53	130	26.31	3.3		
4.0	1674	169.06	1.68			56	124	24.99	3.4		
						63	108	21.93	3.9		
3.6	1901	256.89	1.49	R 97	6	75	92	18.60	4.6		
3.8	1782	240.83	1.58	RF97	6						
4.2	1598	215.94	1.76								
4.8	1403	289.60	2.0			20	332	68.54	0.85		
5.4	1244	256.89	2.3			22	311	64.21	0.91		
5.8	1167	240.83	2.4	R 97	4	25	275	56.73	1.03		
6.4	1046	215.94	2.7	RF97	4	26	255	52.69	1.10		
7.5	901	185.97	3.1			29	231	47.75	1.22		
8.2	819	169.06	3.4			32	208	42.87	1.36		
						38	179	36.93	1.58	R 47	4
						40	168	34.73	1.68	RF47	4
4.2	1602	216.54	0.91			47	145	29.88	1.95		
4.4	1522	205.71	0.96	R 87	6	52	130	26.74	2.2		
5.0	1345	181.77	1.08	RF87	6	53	129	26.70	2.2		
5.9	1149	155.34	1.27			59	114	23.59	2.5		
6.4	1054	142.41	1.38			60	113	23.28	2.5		
						64	106	21.81	2.7		
						72	93	19.27	3.0		
5.6	1194	246.54	1.22			78	87	17.89	3.1		
6.4	1049	216.54	1.39			86	79	16.22	3.3		
6.8	996	205.71	1.46								
7.6	880	181.77	1.65								
8.9	752	155.34	1.94								
9.8	690	142.41	2.1	R 87	4	29	233	48.08	0.81		
11	605	124.97	2.4	RF87	4	31	217	44.81	0.87		
12	574	118.43	2.5			35	190	39.17	0.99		
13	502	103.65	2.9			38	178	36.72	1.06		
15	452	93.38	3.2			43	157	32.40	1.20		
						48	139	28.73	1.35		
						57	118	24.42	1.59	R 37	4
8.3	807	166.59	0.96			62	110	22.27	1.71	RF37	4
9.5	706	145.67	1.09			72	96	19.31	1.97		
10	670	138.39	1.15			77	89	18.05	2.1		
11	588	121.42	1.31			89	77	15.60	2.4		
13	499	102.99	1.55			105	66	13.25	2.7		
15	450	92.97	1.71	R 77	4	117	59	11.83	2.9		
17	396	81.80	1.95	RF77	4	137	50	10.11	3.2		
18	375	77.24	2.1			147	47	9.47	3.4		
21	319	65.77	2.4								
25	273	56.38	2.8								
27	247	50.90	3.1								
31	217	44.78	3.6			48	139	28.78	0.88		
33	205	42.29	3.8			57	119	24.47	1.03		
						62	110	22.32	1.11		
						72	96	19.35	1.28		
						77	89	18.08	1.37		
11	625	128.97	0.90			89	77	15.63	1.58		
12	552	113.94	1.02			105	66	13.28	1.86	R 27	4
13	513	105.83	1.10			117	59	11.86	2.1	RF27	4
14	465	95.91	1.21			137	50	10.13	2.3		
16	417	86.11	1.35	R 67	4	148	47	9.41	2.5		
19	359	74.17	1.57	RF67	4	170	40	8.16	2.7		
20	338	69.75	1.67			182	38	7.63	2.8		
23	297	61.26	1.90			211	33	6.59	3.1		
24	276	56.89	2.0			248	28	5.60	3.4		
27	250	51.56	2.3			278	25	5.00	3.6		
30	224	46.29	2.5								



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.75kW						1.1kW					
77	89	18.06	0.89			0.53	17744	2657	0.95		
89	77	15.57	1.04			0.60	15580	2333	1.09		
96	72	14.52	1.11			0.67	13924	2085	1.22		
110	63	12.69	1.27			0.75	12535	1877	1.35	R 167R97	4
117	59	11.89	1.36			0.84	11153	1670	1.52	RF167R97	4
132	52	10.50	1.41			0.96	9723	1456	1.74		
149	46	9.31	1.47	R 17	4	1.1	8655	1296	2.0		
176	39	7.91	1.48	RF17	4	1.2	7593	1137	2.2		
184	37	7.55	1.57			0.63	14765	2211	0.83		
197	35	7.04	1.67			0.72	13029	1951	0.94		
226	30	6.15	1.73			0.82	11386	1705	1.07		
241	28	5.76	1.75			0.91	10258	1536	1.19		
273	25	5.09	1.90			1.1	8875	1329	1.38	R 147R77	4
308	22	4.51	2.0			1.2	7787	1166	1.57	RF147R77	4
363	19	3.83	2.2			1.4	6872	1029	1.78		
201	35	4.53	2.2			1.6	5937	889	2.1		
212	33	4.30	2.3	RX 67	6	1.8	5236	784	2.3		
241	29	3.77	2.8	RXF67	6	2.0	4641	695	2.6		
284	25	3.20	3.8			1.0	9082	1360	0.83		
268	26	5.18	2.7			1.1	8201	1228	0.92		
307	23	4.53	3.4			1.2	8187	1226	0.92		
323	22	4.30	3.5			1.3	7279	1090	1.03		
369	19	3.77	4.3			1.3	7212	1080	1.04		
434	16	3.20	5.8	RX 67	4	1.4	6812	1020	1.10	R 137R77	4
481	15	2.89	6.8	RXF67	4	1.5	6351	951	1.18	RF137R77	4
547	13	2.54	8.6			1.6	5803	869	1.30		
579	12	2.40	9.5			1.7	5550	831	1.36		
681	10	2.04	12			1.9	4875	730	1.54		
747	9	1.86	13			2.2	4201	629	1.79		
863	8	1.61	13			2.6	3666	549	2.1		
240	29	3.79	2.2			2.9	3272	490	2.3		
256	27	3.55	2.4			2.0	4621	692	0.87		
290	24	3.14	2.5	RX 57	6	2.3	3994	598	1.01		
313	22	2.91	2.8	RXF57	6	2.6	3539	530	1.14		
345	20	2.64	3.2			2.9	3199	479	1.26	R 107R77	4
320	22	4.35	2.9			3.4	2711	406	1.49	RF107R77	4
367	19	3.79	3.4			3.9	2384	357	1.70		
392	18	3.55	3.6			4.5	2090	313	1.93		
443	16	3.14	3.9			5.1	1850	277	2.2		
478	15	2.91	4.3			5.7	1636	245	2.5		
527	13	2.64	4.9	RX 57	4	3.3	2872	430	0.98		
586	12	2.37	5.4	RXF57	4	3.7	2531	379	1.11		
681	11	2.04	6.3			4.2	2244	336	1.26	R 97R57	4
724	10	1.92	6.7			4.7	1977	296	1.43	RF97R57	4
842	9	1.65	7.8			5.6	1663	249	1.70		
939	8	1.48	8.6			6.0	1563	234	1.80		
1069	7	1.30	9.0			6.7	1396	209	2.0		
456	15	3.05	0.97			5.2	1783	267	0.82		
527	13	2.64	1.13			5.5	1710	256	0.85		
621	11	2.24	1.33	RX 37	4	6.0	1569	235	0.93	R 87R57	4
695	10	2.00	1.49	RXF37	4	6.1	1543	231	0.94	RF87R57	4
813	9	1.71	1.74			6.7	1389	208	1.05		
869	8	1.60	1.86			7.2	1302	195	1.12		
						2.8	3586	245.50	1.13		
						3.0	3283	226.11	1.23	R 107	8
						3.4	2901	200.87	1.39	RF107	8
						4.0	2461	167.29	1.64		





R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
1.1kW						1.1kW					
3.5	2788	256.89	1.02			20	488	69.23	0.87		
3.8	2613	240.83	1.08	R 97	6	22	457	64.85	0.92		
4.2	2343	215.94	1.20	RF97	6	24	404	57.29	1.05		
4.9	2018	185.97	1.39			26	375	53.22	1.13		
						29	340	48.23	1.24		
5.4	1812	256.89	1.56			32	305	43.30	1.39		
5.8	1699	240.83	1.66			38	263	37.30	1.61	R 57	4
6.5	1523	215.94	1.85			40	247	35.07	1.71	RF57	4
7.5	1312	185.97	2.1	R 97	4	46	213	30.18	1.99		
8.3	1192	169.06	2.4	RF97	4	52	190	26.97	2.2		
9.3	1064	150.78	2.7			53	186	26.31	2.3		
11	894	126.75	3.2			56	176	24.99	2.4		
12	822	116.48	3.4			64	155	21.93	2.7		
						75	131	18.60	3.2		
6.5	1527	216.54	0.95			83	118	16.79	3.6		
6.8	1451	205.71	1.00								
7.7	1282	181.77	1.14			29	337	47.75	0.84		
9.0	1096	155.34	1.33			33	302	42.87	0.93		
9.8	1004	142.41	1.45			38	260	36.93	1.08		
11	881	124.97	1.65			40	245	34.73	1.15		
12	835	118.43	1.74	R 87	4	47	211	29.88	1.34		
14	731	103.65	1.99	RF87	4	52	188	26.70	1.50		
15	659	93.38	2.2			59	166	23.59	1.69		
17	578	81.92	2.5			60	164	23.28	1.72		
19	510	72.37	2.9			64	154	21.81	1.83	R 47	4
22	448	63.50	3.3			73	136	19.27	2.0	RF47	4
23	424	60.18	3.4			78	126	17.89	2.2		
27	372	52.67	3.9			86	114	16.22	2.3		
						96	103	14.56	2.4		
12	856	121.42	0.90			112	88	12.54	2.7		
14	726	102.99	1.06			119	83	11.79	2.8		
15	656	92.97	1.18			138	72	10.15	3.0		
17	577	81.80	1.34			154	64	9.07	3.2		
18	545	77.24	1.41								
21	464	65.77	1.66	R 77	4	43	229	32.40	0.82		
25	398	56.38	1.94	RF77	4	49	203	28.73	0.93		
28	359	50.90	2.1			57	172	24.42	1.09		
31	316	44.78	2.4			73	139	19.31	1.35		
33	298	42.29	2.6			78	130	18.05	1.45		
39	254	36.01	3.0			90	112	15.60	1.67		
43	231	32.72	3.3			106	95	13.25	1.87		
						118	85	11.83	2.0	R 37	4
16	607	86.11	0.93			138	73	10.11	2.2	RF37	4
19	523	74.17	1.08			148	68	9.47	2.3		
20	492	69.75	1.15			176	57	7.97	2.6		
23	432	61.26	1.31			210	48	6.67	2.8		
25	401	56.89	1.41			247	41	5.67	3.3		
27	364	51.56	1.55			277	36	5.06	3.5		
30	326	46.29	1.73								
35	281	39.88	1.9	R 67	4	72	139	19.35	0.88		
37	265	37.50	2.0	RF67	4	77	130	18.08	0.94		
43	228	32.27	2.2			90	113	15.63	1.09		
49	203	28.83	2.4			105	96	13.28	1.25		
50	201	28.13	2.5			118	85	11.86	1.42		
52	192	26.72	2.6			138	73	10.13	1.57		
60	169	23.44	3.1			172	59	8.16	1.86	R 27	4
70	143	19.89	3.9			183	55	7.63	1.92	RF27	4
						212	47	6.59	2.1		
						250	40	5.60	2.3		
						280	36	5.00	2.5		
						328	31	4.27	2.7		
						350	29	4.00	2.8		
						415	24	3.37	3.1		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
1.1kW						1.5kW					
249	41	5.63	2.5	RX 77	4	1.3	10038	1090	0.75		
262	39	5.35	2.5	RXF77	4	1.4	9393	1020	0.80		
296	35	4.73	3.3			1.5	8758	951	0.86		
						1.6	8003	869	0.94		
201	51	4.53	1.50	RX 67	6	1.7	7653	831	0.98		
212	49	4.30	1.55	RXF67	6	1.9	6723	730	1.12		
241	43	3.77	1.92			2.0	6299	684	1.19	R 137R77	4
						2.2	5792	629	1.30	RF137R77	4
309	33	4.53	2.3			2.4	5479	595	1.37		
326	32	4.30	2.4			2.6	5056	549	1.49		
371	28	3.77	2.9			2.9	4512	490	1.67		
438	24	3.20	4.0			3.3	3941	428	1.91		
484	21	2.89	4.7	RX 67	4	3.7	3444	374	2.2		
551	19	2.54	5.9	RXF67	4	4.4	2919	317	2.6		
583	18	2.40	6.6								
686	15	2.04	8.4			2.6	4827	530	0.84		
753	14	1.86	8.7			2.7	4644	510	0.87		
870	12	1.61	9.1			2.9	4362	479	0.93		
1000	10	1.40	9.5			3.0	4216	463	0.96	R 107R77	4
						3.4	3697	406	1.09	RF107R77	4
240	43	3.79	1.5			3.9	3251	357	1.24		
256	40	3.55	1.6	RX 57	6	4.5	2850	313	1.42		
290	36	3.14	1.7	RXF57	6						
313	33	2.91	1.9			4.2	3060	336	0.92		
345	30	2.64	2.2			4.7	2696	296	1.05		
						5.6	2268	249	1.24	R 97R57	4
369	28	3.79	2.3			6.0	2131	234	1.32	RF97R57	4
394	26	3.55	2.5			6.7	1903	209	1.48		
446	23	3.14	2.6								
481	21	2.91	2.9			3.1	4413	226.11	0.92		
530	19	2.64	3.3	RX 57	4	3.5	3920	200.87	1.03	R 107	8
591	17	2.37	3.7	RXF57	4	4.1	3265	167.29	1.24	RF107	8
686	15	2.04	4.3			4.4	3045	156.04	1.32		
729	14	1.92	4.6								
848	12	1.65	5.3			3.7	3593	245.50	1.12		
946	11	1.48	5.9			4.1	3309	226.11	1.22		
1077	10	1.30	6.2			4.6	2940	200.87	1.37	R 107	6
						5.5	2449	167.29	1.65	RF107	6
700	15	2.00	1.02	RX 37	4	5.8	2304	156.04	1.77		
819	13	1.71	1.19	RXF37	4	6.6	2041	139.47	1.98		
875	12	1.60	1.27								
1.5kW						1.5kW					
0.60	21246	2333	0.80			5.4	2417	256.89	1.14		
0.67	18987	2085	0.89			5.8	2316	240.83	1.22		
0.75	17093	1877	0.99			6.5	2077	215.94	1.36		
0.84	15208	1670	1.11	R 167R97	4	7.5	1789	185.97	1.58		
0.96	13259	1456	1.28	RF167R97	4	8.3	1626	169.06	1.73	R 97	4
1.1	11802	1296	1.43			9.3	1450	150.78	1.94	RF97	4
1.2	10354	1137	1.63			11	1219	126.75	2.3		
1.4	9213	1012	1.84			12	1120	116.48	2.5		
						14	995	103.44	2.8		
						15	889	92.47	3.2		
3.2	3934	432	3.1	R 147R87	4						
3.8	3388	373	3.6	RF147R87	4	7.7	1748	181.77	0.83		
						9.0	1494	155.34	0.98		
0.82	15527	1705	0.8			9.8	1370	142.41	1.06		
0.91	13988	1536	0.87			11	1202	124.97	1.21		
1.1	12103	1329	1.01			12	1139	118.43	1.28		
1.2	10618	1166	1.15			14	997	103.65	1.46		
1.4	9371	1029	1.30	R 147R77	4	15	898	93.38	1.62		
1.6	8096	889	1.51	RF147R77	4	17	788	81.92	1.85	R 87	4
1.8	7140	784	1.71			19	696	72.37	2.1	RF87	4
2.0	6329	695	1.93			22	611	63.50	2.4		
2.3	5528	607	2.2			23	579	60.18	2.5		
2.6	4981	547	2.5			27	507	52.67	2.9		
						30	456	47.45	3.2		
						34	400	41.63	3.6		
						38	353	36.73	4.1		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
1.5kW						1.5kW					
15	894	92.97	0.86			73	186	19.31	1.01		
17	787	81.80	0.98			78	174	18.05	1.08		
18	743	77.24	1.04			90	150	15.60	1.25		
21	633	65.77	1.22			106	127	13.25	1.40		
25	542	56.38	1.42			118	114	11.83	1.51		
28	490	50.90	1.57			138	97	10.11	1.64	R 37	4
31	431	44.78	1.79	R 77	4	148	91	9.47	1.72	RF37	4
33	407	42.29	1.90	RF77	4	176	77	7.97	1.91		
39	346	36.01	2.2			210	64	6.67	2.1		
43	315	32.72	2.4			247	55	5.67	2.4		
49	273	28.35	2.8			277	49	5.06	2.6		
57	237	24.67	3.1			324	42	4.32	2.9		
60	225	23.37	3.4			346	39	4.05	2.9		
65	206	21.43	3.7			411	33	3.41	3.2		
74	181	18.80	4.1								
23	589	61.26	0.96			90	150	15.63	0.81		
25	547	56.89	1.03			105	128	13.28	0.96		
27	496	51.56	1.14			118	114	11.86	1.06		
30	445	46.29	1.27			138	97	10.13	1.18		
35	384	39.88	1.47			172	78	8.16	1.39		
37	361	37.50	1.56	R 67	4	183	73	7.63	1.43	R 27	4
43	310	32.27	1.82	RF67	4	212	63	6.59	1.57	RF27	4
49	277	28.83	2.0			250	54	5.60	1.73		
50	276	28.13	2.0			280	48	5.00	1.86		
52	262	26.72	2.1			328	41	4.27	1.99		
60	230	23.44	2.4			350	38	4.00	2.1		
70	195	19.89	2.9			415	32	3.37	2.3		
78	176	17.95	3.2								
26	523	53.22	0.8			249	54	5.63	1.91		
29	474	48.23	0.9			262	51	5.35	1.88		
32	425	43.30	1.0			296	45	4.73	2.5		
38	366	37.30	1.15			347	39	4.04	3.5	RX 77	4
40	344	35.07	1.23			378	36	3.70	4.0	RXF77	4
46	296	30.18	1.43			431	31	3.25	5.5		
52	265	26.97	1.60	R 57	4	455	30	3.08	6.1		
53	258	26.31	1.64	RF57	4	519	26	2.70	7.8		
56	245	24.99	1.72			576	23	2.43	8.6		
64	215	21.93	1.96								
75	183	18.60	2.3			309	44	4.53	1.77		
83	165	16.79	2.6			326	41	4.30	1.82		
95	145	14.77	2.8			371	36	3.77	2.3		
100	137	13.95	2.9			438	31	3.20	3.1		
118	117	11.88	3.3			484	28	2.89	3.6	RX 67	4
						551	24	2.54	4.5	RXF67	4
38	355	36.93	0.8			583	23	2.40	5.0		
40	334	34.73	0.84			686	20	2.04	6.4		
47	287	29.88	0.98			753	18	1.86	6.6		
52	257	26.70	1.1			870	15	1.61	6.9		
59	227	23.59	1.2			1000	13	1.40	7.3		
60	224	23.28	1.26								
64	210	21.81	1.34			369	36	3.79	1.78		
73	185	19.27	1.50			394	34	3.55	1.90		
78	172	17.89	1.58			446	30	3.14	2.0		
86	156	16.22	1.66			481	28	2.91	2.3		
96	140	14.56	1.8			530	25	2.64	2.6		
112	121	12.54	1.9	R 47	4	591	23	2.37	2.8	RX 57	4
119	113	11.79	2.0	RF47	4	686	20	2.04	3.3	RXF57	4
138	98	10.15	2.1			729	18	1.92	3.5		
154	87	9.07	2.2			848	16	1.65	4.1		
175	77	8.01	2.3			946	14	1.48	4.5		
180	75	7.76	2.4			1077	13	1.30	4.7		
201	67	6.96	2.5								
233	58	6.00	2.5								
248	54	5.64	2.7								
289	47	4.85	3.0								
323	42	4.34	3.3								
366	37	3.83	3.7								



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
2.2kW						2.2kW					
0.85	21991	1670	0.8			5.8	3414	245.50	1.18		
0.98	19173	1456	0.88			6.3	3145	226.11	1.29		
1.1	17066	1296	1.0			7.1	2744	200.87	1.45		
1.2	14972	1137	1.1	R 167R97	4	8.5	2327	167.29	1.74	R 107	4
1.4	13326	1012	1.27	RF167R97	4	9.1	2170	156.04	1.86	RF107	4
1.6	11483	872	1.47			10	1940	139.47	2.1		
1.8	10140	770	1.67			11	1746	125.55	2.3		
2.1	8744	664	1.9			12	1581	113.70	2.6		
						14	1402	100.82	2.9		
						16	1286	91.16	3.2		
2.6	7111	540	1.72			6.6	3003	215.94	0.94		
3.1	6084	462	2.0	R 147R87	4	7.6	2586	185.97	1.09		
3.3	5689	432	2.1	RF147R87	4	8.4	2351	169.06	1.20		
3.8	4912	373	2.5			9.4	2097	150.78	1.34		
4.3	4346	330	2.8			11	1763	126.75	1.60		
1.2	15354	1166	0.80			12	1620	116.48	1.74	R 97	4
1.4	13550	1029	0.90			14	1439	103.44	1.96	RF97	4
1.6	11707	889	1.04	R 147R77	4	15	1286	92.48	2.2		
1.8	10324	784	1.18	RF147R77	4	17	1156	83.15	2.4		
2.0	9152	695	1.34			20	1004	72.17	2.8		
2.3	7993	607	1.53			22	906	65.12	3.1		
2.6	7203	547	1.70			24	832	59.84	3.4		
3.0	6321	480	1.93			27	739	53.14	3.8		
						30	661	47.51	4.3		
1.9	9721	730	0.77			11	1738	124.97	0.84		
2.1	9108	684	0.83			12	1647	118.43	0.88		
2.3	8376	629	0.90			14	1442	103.65	1.01		
2.4	7923	595	0.95			15	1299	93.38	1.12		
2.6	7311	549	1.03	R 137R77	4	17	1139	81.92	1.28		
2.9	6525	490	1.15	RF137R77	4	20	1007	72.37	1.45		
3.3	5699	428	1.32			22	883	63.50	1.65		
3.8	4980	374	1.51			24	837	60.18	1.74	R 87	4
4.5	4221	317	1.78			27	733	52.67	1.99	RF87	4
5.0	3808	286	1.97			30	660	47.45	2.2		
5.6	3377	250	2.2			34	579	41.63	2.5		
6.4	2958	219	2.5			39	511	36.73	2.9		
3.9	4822	357	0.84			41	478	34.34	3.0		
4.4	4336	321	0.93			44	453	32.57	3.2		
4.5	4228	313	0.96	R 107R77	4	45	434	31.22	3.4		
5.1	3741	277	1.08	RF107R77	4	51	387	27.81	3.8		
5.5	3458	256	1.17			61	325	23.40	4.5		
6.7	2809	208	1.44			66	299	21.51	4.7		
6.0	3125	234	0.90	R 97R57	4	22	915	65.77	0.8		
6.7	2791	209	1.01	RF97R57	4	25	784	56.38	1.0		
3.2	6212	223.34	1.21			28	708	50.90	1.1		
3.8	5234	188.16	1.43			32	623	44.78	1.2		
4.1	4851	174.4	1.55			34	588	42.29	1.31		
4.5	4348	156.31	1.73	R 137	8	39	501	36.01	1.54		
5.0	3925	141.12	1.92	RF137	8	43	455	32.72	1.69	R 77	4
5.5	3565	128.18	2.1			50	394	28.35	1.95	RF77	4
6.2	3163	113.72	2.4			58	343	24.67	2.1		
6.9	2871	103.2	2.6			61	325	23.37	2.4		
						66	298	21.43	2.6		
4.7	4220	200.87	0.96			76	261	18.80	2.8		
5.6	3515	167.29	1.15	R 107	6	80	248	17.82	3.0		
6.0	3278	156.04	1.23	RF107	6	91	217	15.60	3.2		
6.7	2930	139.47	1.38			101	195	14.05	3.5		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
2.2kW						2.2kW					
36	555	39.88	0.98			300	69	4.73	1.69		
38	522	37.50	1.03			351	59	4.04	2.3		
44	449	32.27	1.13			384	54	3.70	2.7		
49	401	28.83	1.22			437	47	3.25	3.6		
61	326	23.44	1.61			461	45	3.08	4.1	RX 77	4
71	277	19.89	2.0	R 67	4	526	39	2.70	5.2	RXF77	4
79	250	17.95	2.2	RF67	4	584	35	2.43	5.7		
90	220	15.79	2.4			667	31	2.13	6.1		
95	207	14.91	2.5			755	27	1.88	6.4		
112	177	12.70	2.8			850	24	1.67	6.7		
123	160	11.54	2.9			1000	21	1.42	7.1		
142	139	10.00	3.2								
163	121	8.70	3.3			377	55	3.77	1.50		
182	108	7.79	3.4			444	46	3.20	2.0		
						491	42	2.89	2.4		
38	519	37.30	0.82			559	37	2.54	3.0	RX 67	4
40	488	35.07	0.87			592	35	2.40	3.3	RXF67	4
47	420	30.18	1.01			696	30	2.04	4.3		
53	375	26.97	1.13			763	27	1.86	4.4		
65	305	21.93	1.39			882	23	1.61	4.6		
76	259	18.60	1.64			1014	20	1.40	4.8		
85	234	16.79	1.81	R 57	4						
96	205	14.77	1.99	RF57	4	452	46	3.14	1.34		
102	194	13.95	2.1			538	38	2.64	1.69		
120	165	11.88	2.3			599	34	2.37	1.89		
132	150	10.79	2.4			696	30	2.04	2.2	RX 57	4
152	130	9.35	2.7			740	28	1.92	2.3	RXF57	4
157	126	9.06	2.8			861	24	1.65	2.7		
178	111	7.97	3.0			959	21	1.48	3.0		
						1092	19	1.30	3.1		
74	268	19.27	1.03			3.0kW					
88	226	16.22	1.15			1.2	20417	1137	0.83		
98	203	14.56	1.23			1.4	18172	1012	0.93		
113	174	12.54	1.35			1.6	15658	872	1.08	R 167R97	4
120	164	11.79	1.40			1.8	13827	770	1.22	RF167R97	4
140	141	10.15	1.53	R 47	4	2.1	11923	664	1.42		
157	126	9.07	1.64	RF47	4	2.8	9158	510	1.85		
177	111	8.01	1.73								
183	108	7.76	1.42			2.6	9697	540	1.26		
204	97	6.96	1.54			3.1	8296	462	1.47		
237	83	6.00	1.76			3.3	7757	432	1.58	R 147R87	4
252	78	5.64	1.86			3.8	6698	373	1.82	RF147R87	4
293	67	4.85	2.1			4.3	5926	330	2.1		
327	60	4.34	2.3			5.0	5082	283	2.4		
371	53	3.83	2.5								
						1.6	15963	889	0.8		
91	217	15.60	0.87			1.8	14078	784	0.87	R 147R77	4
107	184	13.25	0.97			2.0	12480	695	0.98	RF147R77	4
120	165	11.83	1.05			2.3	10900	607	1.12		
140	141	10.11	1.14	R 37	4	2.6	9822	547	1.24		
150	132	9.47	1.19	RF37	4						
178	111	7.97	1.32			2.7	9388	517	0.80		
213	93	6.67	1.46			2.9	8898	490	0.85		
250	79	5.67	1.69			3.1	8226	453	0.91		
281	70	5.06	1.80			3.3	7772	428	0.97		
329	60	4.32	2.0			3.8	6791	374	1.11	R 137R77	4
351	56	4.05	2.0			4.5	5756	317	1.31	RF137R77	4
416	47	3.41	2.2			5.0	5193	286	1.45		
						5.7	4540	250	1.66		
140	141	10.13	0.81			6.5	3977	219	1.89		
215	92	6.59	1.09	R 27	4						
254	78	5.60	1.19	RF27	4	5.6	4798	253	0.84	R 107R77	4
284	70	5.00	1.28			5.8	4647	245	0.87	RF107R77	4
333	59	4.27	1.38			6.8	3945	208	1.02		
355	56	4.00	1.44			7.8	3433	181	1.18		
421	47	3.37	1.58								



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
3.0kW						3.0kW					
3.2	8472	223.34	0.89			32	849	44.78	0.91		
3.8	7137	188.16	1.05			34	802	42.29	0.96		
4.1	6615	174.40	1.14			39	683	36.01	1.13		
4.5	5929	156.31	1.27	R 137	8	43	621	32.72	1.24		
5.0	5353	141.12	1.40	RF137	8	50	538	28.35	1.43		
5.5	4862	128.18	1.55			58	468	24.67	1.57		
6.2	4314	113.72	1.74			61	443	23.37	1.74		
6.9	3914	103.20	1.92			66	406	21.43	1.90	R 77	4
8.0	3364	88.70	2.20			76	357	18.80	2.1	RF77	4
						80	338	17.82	2.2		
						91	296	15.60	2.4		
						101	266	14.05	2.5		
4.3	6245	222.60	1.20			115	234	12.33	2.8		
5.1	5287	188.45	1.42			131	206	10.88	3.0		
5.5	4892	174.40	1.54	R 137	6	147	183	9.64	3.2		
6.1	4385	156.31	1.71	RF137	6	169	160	8.42	3.7		
6.8	3959	141.12	1.90			187	144	7.59	4.0		
7.5	3596	128.18	2.10			213	126	6.66	4.3		
8.4	3190	113.72	2.40								
9.3	2895	103.20	2.60								
6.2	4377	156.04	0.92	R 107	6	61	445	23.44	1.18		
6.9	3913	139.47	1.03	RF107	6	71	377	19.89	1.50		
7.6	3522	125.55	1.15			79	340	17.95	1.63		
						90	299	15.79	1.76	R 67	4
6.3	4288	226.11	0.94			95	283	14.91	1.8	RF67	4
7.1	3810	200.87	1.06			112	241	12.70	2.0		
8.5	3172	167.29	1.27			123	219	11.54	2.1		
9.1	2959	156.04	1.37			142	190	10.00	2.3		
10	2645	139.47	1.53								
11	2381	125.55	1.70	R 107	4	53	511	26.97	0.8		
12	2156	113.70	1.87	RF107	4	65	416	21.93	1.02		
14	1912	100.82	2.1			76	353	18.60	1.20		
16	1729	91.16	2.3			85	318	16.79	1.33		
18	1465	77.26	2.8			96	280	14.77	1.46		
20	1366	72.00	3.0			102	265	13.95	1.53		
						120	225	11.88	1.69		
						132	205	10.79	1.79	R 57	4
9.4	2860	150.78	0.99			152	177	9.35	2.0	RF57	4
11	2404	126.75	1.17			157	172	9.06	2.1		
12	2209	116.48	1.28			178	151	7.97	2.2		
14	1962	103.44	1.44			189	143	7.53	2.3		
15	1754	92.48	1.61			222	122	6.41	2.6		
17	1577	83.15	1.79	R 97	4	244	110	5.82	2.7		
20	1369	72.17	2.1	RF97	4	281	96	5.05	3.0		
22	1235	65.12	2.3			323	83	4.39	3.2		
24	1135	59.84	2.5								
27	1008	53.14	2.8			88	308	16.22	0.84		
30	901	47.51	3.1			98	276	14.56	0.90		
33	810	42.72	3.5			113	238	12.54	0.99		
38	703	37.08	4.0			120	224	11.79	1.03		
43	630	33.20	4.3			140	192	10.15	1.12		
						157	172	9.07	1.20		
						177	152	8.01	1.27	R 47	4
15	1771	93.38	0.82			183	147	7.76	1.04	RF47	4
17	1554	81.92	0.94			204	132	6.96	1.13		
20	1373	72.37	1.06			237	114	6.00	1.29		
22	1204	63.50	1.21			252	107	5.64	1.36		
24	1141	60.18	1.28			293	92	4.85	1.53		
27	999	52.67	1.46			327	82	4.34	1.67		
30	900	47.45	1.62			371	73	3.83	1.86		
34	790	41.63	1.85	R 87	4						
39	697	36.73	2.1	RF87	4	140	192	10.11	0.83		
41	651	34.34	2.2			150	180	9.47	0.87		
44	618	32.57	2.4			178	151	7.97	0.97		
45	592	31.22	2.5			213	126	6.67	1.07	R 37	4
51	528	27.84	2.8			250	108	5.67	1.24	RF37	4
53	527	27.81	2.8			281	96	5.06	1.32		
61	444	23.40	3.3			329	82	4.32	1.45		
66	408	21.51	3.5			351	77	4.05	1.49		
74	362	19.10	3.6			416	65	3.41	1.63		
83	324	17.08	4.0								
93	291	15.35	4.3								

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
3.0kW						4.0kW					
254	106	5.60	0.88			3.8	8877	376	0.85		
284	95	5.00	0.94	R 27	4	3.9	8830	374	0.85		
333	81	4.27	1.01	RF27	4	4.2	8004	339	0.94	R 137R77	4
355	76	4.00	1.05			4.5	7484	317	1.00	RF137R77	4
421	64	3.37	1.2			4.8	7012	297	1.07		
						5.0	6752	286	1.11		
109	258	6.47	4.31	RX 127	8	5.8	5902	250	1.27		
				RXF127	8	6.6	5171	219	1.45		
220	127	6.44	1.42			7.5	4509	191	0.90	R 107R77	4
256	110	5.55	1.92	RX 87	4	8.0	4273	181	0.95	RF107R77	4
281	100	5.05	2.3	RXF87	4	8.6	3943	167	1.03		
316	89	4.50	3.1			4.4	8152	163.46	1.50	R 147	8
376	75	3.78	3.8			4.9	7324	146.85	1.67	RF147	8
300	94	4.73	1.24			6.0	5946	119.24	2.0		
351	80	4.04	1.68	RX 77	4	6.5	5487	110.03	2.2		
384	73	3.70	1.97	RXF77	4	4.1	8698	174.40	0.86		
437	64	3.25	2.7			4.6	7796	156.31	0.96	R 137	8
461	61	3.08	3.0			5.1	7038	141.12	1.07	RF137	8
377	75	3.77	1.10			5.6	6393	128.18	1.18		
444	63	3.20	1.49			6.3	5671	113.72	1.33		
491	57	2.89	1.74			7.0	5147	103.20	1.46		
559	50	2.54	2.2	RX 67	4	4.3	8354	223.34	0.90		
592	47	2.40	2.4	RXF67	4	5.1	7038	188.16	1.07		
696	40	2.04	3.1			5.5	6523	174.40	1.15	R 137	6
763	37	1.86	3.2			6.1	5847	156.31	1.29	RF137	6
882	32	1.61	3.4			6.8	5278	141.12	1.42		
1014	28	1.40	3.5			7.5	4794	128.18	1.57		
452	62	3.14	0.98			8.4	4254	113.72	1.77		
538	52	2.64	1.24			9.3	3860	103.2	1.95		
599	47	2.37	1.38			11	3318	88.70	2.3		
696	40	2.04	1.61	RX 57	4	9	4172	167.29	0.97		
740	38	1.92	1.71	RXF57	4	10	3891	156.04	1.04		
861	33	1.65	1.99			11	3478	139.47	1.16		
959	29	1.48	2.2			12	3131	125.55	1.29		
1092	26	1.30	2.3			13	2835	113.70	1.43		
4.0kW						14	2514	100.82	1.61	R 107	4
1.7	20588	872	0.82			16	2273	91.16	1.78	RF107	4
1.9	18179	770	0.93			19	1927	77.26	2.1		
2.2	15677	664	1.08	R 167R97	4	20	1795	72.00	2.3		
2.8	12041	510	1.41	RF167R97	4	22	1616	64.81	2.5		
3.8	8972	380	1.89			25	1464	58.69	2.8		
4.3	7980	338	2.1			28	1298	52.05	3.1		
2.7	12749	540	0.96			12	2905	116.48	0.97		
3.1	10908	462	1.12			14	2579	103.44	1.09		
3.3	10199	432	1.20			16	2306	92.48	1.22		
3.9	8806	373	1.39			17	2073	83.15	1.36		
4.4	7791	330	1.57	R 147R87	4	20	1800	72.17	1.57		
5.1	6682	283	1.83	RF147R87	4	22	1624	65.12	1.74		
5.8	5902	250	2.1			24	1492	59.84	1.89		
6.7	5100	216	2.4			27	1325	53.14	2.1		
7.5	4509	191	2.7			30	1185	47.51	2.4	R 97	4
8.9	3801	161	3.2			34	1065	42.72	2.6	RF97	4
2.4	14331	607	0.85			39	925	37.08	3.0		
2.6	12915	547	0.95	R 147R77	4	43	828	33.20	3.2		
3.0	11333	480	1.08	RF147R77	4	45	803	32.22	3.3		
3.5	9609	407	1.27			54	669	26.84	3.6		
						58	624	25.03	4.3		
						64	558	22.37	4.6		
						71	502	20.14	4.9		
						78	455	18.24	6.2		



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
4.0kW						4.0kW					
23	1583	63.5	0.92			142	253	10.15	0.85		
24	1501	60.18	0.97			159	226	9.07	0.86		
27	1313	52.67	1.11			180	200	8.01	0.91		
30	1183	47.45	1.23			207	174	6.96	0.96	R 47	4
35	1038	41.63	1.40			240	150	6.00	0.98	RF47	4
39	916	36.73	1.59			255	141	5.64	1.04		
42	856	34.34	1.70			297	121	4.85	1.17		
44	812	32.57	1.79			332	108	4.34	1.27		
46	779	31.22	1.87	R 87	4	376	96	3.83	1.42		
52	694	27.84	2.1	RF87	4						
53	693	27.81	2.2			109	344	6.47	3.23	RX 127	8
62	584	23.40	2.5			121	310	5.88	3.59	RXF127	8
67	536	21.51	2.7								
75	476	19.10	3.1			147	254	6.47	4.37	RX 127	6
84	426	17.08	3.1							RXF127	6
94	383	15.35	3.3								
108	332	13.33	3.6			259	144	5.55	1.46		
121	297	11.93	3.9			285	131	5.05	1.78	RX 87	4
						320	117	4.50	2.3	RXF87	4
						381	98	3.78	2.9		
40	898	36.01	0.86								
44	816	32.72	0.94			356	105	4.04	1.28		
51	707	28.35	1.09			389	96	3.70	1.50		
58	615	24.67	1.19			443	84	3.25	2.0		
62	583	23.37	1.32			468	80	3.08	2.3		
67	534	21.43	1.44			533	70	2.70	2.9	RX 77	4
77	469	18.80	1.56			593	63	2.43	3.2	RXF77	4
81	444	17.82	1.65	R 77	4	676	55	2.13	3.4		
92	389	15.60	1.79	RF77	4	766	49	1.88	3.6		
102	350	14.05	1.93			862	43	1.67	3.7		
117	307	12.33	2.1			1014	37	1.42	3.9		
132	271	10.88	2.3								
149	240	9.64	2.5			450	83	3.20	1.13		
171	210	8.42	2.8			498	75	2.89	1.33		
190	189	7.59	3.0			567	66	2.54	1.68		
216	166	6.66	3.3			600	62	2.40	1.85	RX 67	4
245	147	5.88	3.5			706	53	2.04	2.4	RXF67	4
276	130	5.21	3.7			774	48	1.86	2.4		
						894	42	1.61	2.6		
						1029	36	1.40	2.7		
72	496	19.89	1.14								
80	448	17.95	1.24			545	69	2.64	0.95		
91	394	15.79	1.34			608	62	2.37	1.05		
97	372	14.91	1.39			706	53	2.04	1.22	RX 57	4
113	317	12.70	1.54			750	50	1.92	1.30	RXF57	4
125	288	11.54	1.63	R 67	4	873	43	1.65	1.51		
144	249	10.00	1.77	RF67	4	973	38	1.48	1.66		
166	217	8.70	1.91			1108	34	1.30	1.75		
185	194	7.79	1.84								
196	184	7.36	1.90			5.5kW					
230	156	6.27	2.0			2.2	21556	664	0.80		
253	142	5.70	2.1			2.5	18764	578	0.90		
292	123	4.93	2.2			2.8	16556	510	1.02	R 167R97	4
336	107	4.29	2.4			3.3	14219	438	1.19	RF167R97	4
						3.8	12336	380	1.37		
77	464	18.60	0.91			4.3	10973	338	1.54		
86	419	16.79	1.01			4.7	9966	307	1.70		
97	368	14.77	1.11			5.1	9155	282	1.85		
103	348	13.95	1.16								
121	296	11.88	1.29			3.1	14998	462	0.81		
133	269	10.79	1.36	R 57	4	3.3	14024	432	0.87		
154	233	9.35	1.49	RF57	4	3.9	12109	373	1.01	R 147R87	4
159	226	9.06	1.56			4.4	10713	330	1.14	RF147R87	4
181	199	7.97	1.68			5.1	9187	283	1.33		
191	188	7.53	1.75			5.8	8116	250	1.51		
225	160	6.41	1.97			6.7	7012	216	1.74		
247	145	5.82	2.1			7.5	6201	191	1.97		
285	126	5.05	2.3								
328	109	4.39	2.4								

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
5.5kW						5.5kW					
3.7	12752	196.41	1.32			45	1105	32.22	2.2		
4.5	10440	160.80	1.63	R 167	8	54	920	26.84	2.6		
5.5	8469	130.44	1.99	RF167	8	58	858	25.03	3.1	R 97	4
6.0	7855	120.99	2.17			64	767	22.37	3.3	RF97	4
6.9	6779	104.41	2.50			71	691	20.14	3.6		
						79	625	18.24	3.8		
						89	554	16.17	4.1		
4.4	10613	163.46	1.15	R 147	8	30	1627	47.45	0.90		
4.9	9534	146.85	1.28	RF147	8	35	1427	41.63	1.02		
6.0	7742	119.24	1.57			39	1259	36.73	1.16		
6.6	7144	110.03	1.72			44	1117	32.57	1.30		
5.9	7960	163.46	1.54	R 147	6	52	955	27.84	1.53		
6.5	7151	146.85	1.71	RF147	6	53	954	27.81	1.53		
8.0	6133	119.24	2.0			62	802	23.40	1.82	R 87	4
8.8	5659	110.03	2.2			67	738	21.51	2.0	RF87	4
10	4865	94.60	2.5			75	655	19.10	2.1		
12	4293	83.47	2.8			84	586	17.08	2.2		
5.6	8790	128.18	0.86	R 137	8	94	526	15.35	2.4		
6.3	7798	113.72	0.96	RF137	8	108	457	13.33	2.6		
7.0	7077	103.2	1.06			121	409	11.93	2.8		
8.1	6083	88.70	1.24			145	339	9.90	3.3		
5.5	8970	174.40	0.84	R 137	6	156	317	9.25	3.6		
6.1	8039	156.31	0.94	RF137	6	173	285	8.32	3.8		
6.8	7258	141.12	1.04			199	248	7.22	4.1		
7.5	6592	128.18	1.14			77	645	18.80	1.14		
8.4	5849	113.72	1.29			81	611	17.82	1.20		
9.3	5308	103.20	1.42			92	535	15.60	1.30		
6.4	7658	223.34	0.98	R 137	4	102	482	14.05	1.40		
7.7	6451	188.16	1.17	RF137	4	117	423	12.33	1.53	R 77	4
8.3	5980	174.40	1.26			132	373	10.88	1.66	RF77	4
9.2	5359	156.31	1.40			149	331	9.64	1.79		
10	4839	141.12	1.55			171	289	8.42	2.1		
11	4395	128.18	1.71			190	260	7.59	2.2		
13	3899	113.72	1.93			216	228	6.66	2.4		
14	3538	103.20	2.1			245	202	5.88	2.52		
16	3041	88.70	2.5			276	179	5.21	2.68		
18	2774	80.91	2.7			91	541	15.79	0.97		
20	2520	73.49	3.0			97	511	14.91	1.01		
22	2236	65.20	3.4			113	435	12.70	1.12		
24	2029	59.17	3.7			125	396	11.54	1.19		
28	1744	50.86	4.3			144	343	10.00	1.29		
11	4305	125.55	0.94	R 107	4	166	298	8.70	1.34	R 67	4
13	3898	113.70	1.04	RF107	4	185	267	7.79	1.38	RF67	4
14	3457	100.82	1.17			196	252	7.36	1.39		
16	3126	91.16	1.29			230	215	6.27	1.44		
19	2649	77.26	1.54			253	195	5.70	1.49		
20	2469	72.00	1.64			292	169	4.93	1.61		
22	2222	64.84	1.82			336	147	4.29	1.73		
25	2012	58.69	2.01			97	506	14.77	0.81		
28	1785	52.05	2.3			103	478	13.95	0.85		
31	1614	47.06	2.5			121	407	11.88	0.93		
36	1367	39.88	3.0			133	370	10.79	0.99		
17	2851	83.15	0.99	R 97	4	154	321	9.35	1.08	R 57	4
20	2475	72.17	1.14	RF97	4	181	273	7.97	1.22	RF57	4
22	2233	65.12	1.26			191	258	7.53	1.27		
24	2052	59.84	1.37			225	220	6.41	1.43		
27	1822	53.14	1.55			247	200	5.82	1.51		
30	1629	47.51	1.73			285	173	5.05	1.66		
34	1465	42.72	1.93			328	151	4.39	1.75		
39	1271	37.08	2.2			297	166	4.85	0.85	R 47	4
43	1138	33.20	2.4			332	149	4.34	0.92	RF47	4
52	944	27.54	2.7			376	131	3.83	1.03		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
5.5kW						7.5kW					
116	443	6.22	3.79	RX 157 RXF157	8 8	4.4	14408	330	0.85		
123	420	5.88	2.64	RX 127 RXF127	8 8	5.2	12356	283	0.99		
147	350	6.47	3.18			5.8	10915	250	1.12	R 147R87	4
164	315	5.88	3.53	RX 127 RXF127	6 6	6.8	9431	216	1.30	RF147R87	4
182	283	5.28	3.92			7.6	8339	191	1.47		
217	238	6.65	1.82			9.1	7030	161	1.74		
257	200	5.60	2.14	RX 107 RXF107	4 4	3.7	18366	196.41	0.92		
277	186	5.19	3.52			4.5	15036	160.80	1.13	R 167	4
310	166	4.65	3.93			5.5	12197	130.44	1.39	RF167	4
247	208	5.82	1.9			6.0	11314	120.99	1.50		
297	173	4.85	2.1			6.9	9763	104.41	1.73		
319	162	4.52	3.5			4.9	13775	196.41	1.23		
356	144	4.04	3.9	RX 97 RXF97	4 4	6.0	11277	160.80	1.50		
396	130	3.64	4.3			7.4	9145	130.44	1.84		
436	118	3.30	4.7			7.9	8485	120.99	1.99		
493	104	2.92	5.4			9.2	7323	104.41	2.31	R 167	6
545	94	2.64	5.9			10	6462	92.14	2.6	RF167	6
643	80	2.24	7.0			12	5602	79.88	3.0		
735	70	1.96	7.6			14	4984	71.07	3.4		
878	59	1.64	8.1			15	4487	63.98	3.8		
1014	51	1.42	8.4			16	4103	58.51	4.1		
320	161	4.50	1.7			4.4	15285	163.46	0.80		
381	135	3.78	2.1			4.9	13732	146.85	0.89	R 147	8
414	124	3.48	3.1	RX 87 RXF87	4 4	6.0	11150	119.24	1.09	RF147	8
466	110	3.09	3.4			6.6	10289	110.03	1.20		
522	99	2.76	3.9			5.9	11464	163.46	1.07		
581	89	2.48	4.3			6.5	10299	146.85	1.19		
670	77	2.15	4.7			8.0	8363	119.24	1.45	R 147	6
443	116	3.25	1.47			8.8	7717	110.03	1.59	RF147	6
468	110	3.08	1.65			10	6635	94.60	1.84		
533	97	2.70	2.1	RX 77 RXF77	4 4	12	5854	83.47	2.1		
593	87	2.43	2.3			7.7	8677	188.16	0.87		
676	76	2.13	2.5			8.4	8042	174.40	0.94		
766	67	1.88	2.6			9.3	7208	156.31	1.04		
862	60	1.67	2.7			10	6508	141.12	1.16		
1014	51	1.42	2.9			11	5911	128.18	1.27	R 137	4
567	91	2.54	1.22			13	5244	113.72	1.43	RF137	4
600	86	2.40	1.35			14	4759	103.20	1.58		
706	73	2.04	1.73	RX 67 RXF67	4 4	16	4090	88.70	1.84		
774	66	1.86	1.78			18	3731	80.91	2.0		
894	58	1.61	1.86			20	3389	73.49	2.2		
1029	50	1.40	2.0			22	3007	65.20	2.5		
706	73	2.04	0.89			25	2729	59.17	2.8		
750	69	1.92	0.95	RX 57 RXF57	4 4	29	2345	50.86	3.2		
873	59	1.65	1.10			16	4204	91.16	0.96		
973	53	1.48	1.21			19	3563	77.26	1.13		
1108	46	1.30	1.27			20	3320	72.00	1.22		
7.5kW						23	2989	64.81	1.35		
2.9	22268	510	0.80			25	2706	58.69	1.49		
3.3	19124	438	0.88	R 167R97	4	28	2400	52.05	1.68	R 107	4
3.8	16591	380	1.02	RF167R97	4	31	2170	47.06	1.86	RF107	4
4.3	14758	338	1.15			37	1839	39.88	2.2		
4.8	13404	307	1.26			42	1607	34.84	2.5		
5.2	12313	282	1.37			48	1404	30.44	2.9		
						50	1344	29.14	3.0		
						54	1257	27.25	3.2		
						59	1134	24.60	3.6		
						65	1030	22.34	3.9		



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
7.5kW						7.5kW					
24	2760	59.84	1.02	R 97 RF97	4	123	572	5.88	2.94	RX 127	6
27	2451	53.14	1.15			136	515	5.28	3.26	RXF127	6
31	2191	47.51	1.29			167	420	4.29	4.0		
34	1970	42.72	1.43			221	318	6.47	3.49	RX 127	4
39	1710	37.08	1.65			245	286	5.88	3.88	RXF127	4
44	1531	33.20	1.72			220	320	6.65	1.35	RX 107 RXF107	4
45	1486	32.22	1.77			260	269	5.60	1.59		
53	1270	27.54	1.94			281	250	5.19	2.6		
54	1238	26.84	1.98			314	224	4.65	2.9		
58	1154	25.03	2.30			348	202	4.20	3.9		
65	1032	22.37	2.48			251	280	5.82	1.41	RX 97 RXF97	4
72	929	20.14	2.64			301	233	4.85	1.59		
80	841	18.24	2.79			323	217	4.52	2.6		
40	1694	36.73	0.86			361	194	4.04	2.9		
45	1502	32.57	0.97			401	175	3.64	3.2		
52	1284	27.84	1.13			442	159	3.30	3.5		
53	1282	27.81	1.1	500	140	2.92	4.0				
62	1079	23.40	1.35	324	216	4.50	1.26	RX 87 RXF87	4		
68	992	21.51	1.42	386	182	3.78	1.58				
76	881	19.10	1.54	420	167	3.48	2.3				
85	788	17.08	1.66	472	149	3.09	2.6				
95	708	15.35	1.78	529	133	2.76	2.9				
110	615	13.33	1.96	589	119	2.48	3.2				
122	550	11.93	2.1	679	103	2.15	3.5				
147	457	9.90	2.4	756	93	1.93	3.6				
158	427	9.25	2.7	913	77	1.60	3.8				
175	384	8.32	2.8	1050	67	1.39	4.1				
202	333	7.22	3.0	449	156	3.25	1.09			RX 77 RXF77	4
226	298	6.47	3.2	474	148	3.08	1.23				
272	247	5.36	3.5	541	130	2.70	1.56				
78	867	18.80	0.85	601	117	2.43	1.73				
82	822	17.82	0.89	685	102	2.13	1.84				
94	719	15.60	0.97	777	90	1.88	1.94				
104	648	14.05	1.04	874	80	1.67	2.0				
118	569	12.33	1.14	1028	68	1.42	2.1				
134	502	10.88	1.24	575	122	2.54	0.91	RX 67 RXF67	4		
151	445	9.64	1.33	608	115	2.40	1.00				
173	388	8.42	1.53	716	98	2.04	1.28				
192	350	7.59	1.64	785	89	1.86	1.32				
219	307	6.66	1.78	907	77	1.61	1.38				
248	271	5.88	1.87	1043	67	1.40	1.45				
280	240	5.21	2.00	11kW							
115	586	12.70	0.83	4.9	18891	295	0.90	R 167R107 RF167R107	4		
127	532	11.54	0.88	5.1	18379	287	0.92				
146	461	10.00	0.96	5.2	17994	281	0.94				
168	401	8.70	0.99	6.1	15241	238	1.11				
187	359	7.79	1.02	7.0	13320	208	1.27				
198	339	7.36	1.03	8.3	11271	176	1.50				
233	289	6.27	1.07	4.3	21645	338	0.80			R 167R97 RF167R97	4
256	263	5.70	1.11	4.8	19659	307	0.86				
296	227	4.93	1.20	5.2	18059	282	0.94				
340	198	4.29	1.28	5.8	16009	250	0.80	R 147R87 RF147R87	4		
183	368	7.97	0.91	6.8	13832	216	0.88				
194	347	7.53	0.95	7.6	12231	191	1.00				
228	296	6.41	1.07	9.1	10310	161	1.19				
251	268	5.82	1.12	9.2	10182	159	1.20				
289	233	5.05	1.23								
333	202	4.39	1.30								
123	572	5.88	1.94	RX 127 RXF127	8 8						
156	449	6.22	3.74	RX 157 RXF157	6 6						



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
11kW						11kW					
6.0	16540	160.80	1.02			135	732	10.83	2.7	R 97	4
7.4	13417	130.44	1.26	R 167	6	158	626	9.26	3.0	RF97	4
7.9	12445	120.99	1.36	RF167	6	174	566	8.37	3.4		
9.2	10740	104.41	1.58			206	480	7.09	3.9		
						235	419	6.20	4.2		
7.4	13284	196.41	1.27			68	1455	21.51	0.97		
9.1	10876	160.80	1.56			76	1292	19.10	1.05		
11	8822	130.44	1.91	R 167	4	85	1155	17.08	1.13		
12	8183	120.99	2.07	RF167	4	95	1038	15.35	1.21		
14	7062	104.41	2.4			110	902	13.33	1.33		
16	6232	92.14	2.7			122	807	11.93	1.43	R 87	4
18	5403	79.88	3.1			147	670	9.90	1.66	RF87	4
21	4807	71.07	3.5			158	626	9.25	1.82		
						175	563	8.32	1.94		
6.5	15105	146.85	0.81			202	488	7.22	2.1		
8.1	12265	119.24	1.0	R 147	6	226	438	6.47	2.2		
8.7	11318	110.03	1.08	RF147	6	272	363	5.36	2.4		
10	9731	94.60	1.26								
12	8586	83.47	1.42								
8.9	11056	163.46	1.11			134	736	10.88	0.84		
10	9932	146.85	1.23			151	652	9.64	0.91		
12	8065	119.24	1.52			192	513	7.59	1.12	R 77	4
13	7442	110.03	1.64			219	450	6.66	1.21	RF77	4
15	6398	94.60	1.91	R 147	4	248	398	5.88	1.28		
17	5645	83.47	2.2	RF147	4	280	352	5.21	1.36		
20	4876	72.09	2.5								
22	4508	66.65	2.7			191	539	5.05	3.12	RX 157	6
24	4129	61.50	3.0			209	492	4.68	3.41	RXF157	6
28	3576	52.87	3.4			240	429	4.04	3.92		
						235	437	6.22	3.84	RX 157	4
										RXF157	4
10	9545	141.12	0.80								
11	8669	128.18	0.87			249	414	5.88	2.68		
13	7691	113.72	0.98			277	372	5.28	2.98	RX 127	4
14	6980	103.2	1.08			339	304	4.29	3.65	RXF127	4
16	5999	88.70	1.25			372	277	3.95	4.01		
18	5472	80.91	1.37	R 137	4						
20	4970	73.49	1.51	RF137	4	281	366	5.19	1.79		
22	4410	65.20	1.71			314	328	4.65	1.99		
25	4002	59.17	1.88			348	296	4.20	2.63	RX 107	4
29	3440	50.86	2.2			383	269	3.81	2.90	RXF107	4
33	3002	44.39	2.5			432	238	3.38	3.27		
39	2540	37.65	3.0			476	216	3.07	3.60		
44	2226	32.91	3.4			553	186	2.64	4.19		
23	4383	64.81	0.92			323	319	4.52	1.75		
25	3969	58.69	1.02			361	285	4.04	1.96		
28	3520	52.05	1.15			401	257	3.64	2.2		
31	3183	47.06	1.27			442	233	3.30	2.4		
37	2697	39.88	1.50			500	206	2.92	2.7	RX 97	4
42	2356	34.84	1.72	R 107	4	553	186	2.64	3.0	RXF97	4
48	2059	30.44	1.96	RF107	4	652	158	2.24	3.5		
50	1971	29.14	2.1			745	138	1.96	3.9		
54	1843	27.25	2.2			890	116	1.64	4.1		
59	1664	24.60	2.4			1028	110	1.42	4.3		
65	1511	22.34	2.7								
74	1341	19.82	3.0			420	245	3.48	1.55		
81	1217	17.99	3.3			472	218	3.09	1.75		
						529	195	2.76	1.96		
34	2889	42.72	0.98			589	175	2.48	2.2	RX 87	4
39	2508	37.08	1.12			679	152	2.15	2.4	RXF87	4
44	2245	33.20	1.21			756	136	1.93	2.5		
53	1863	27.54	1.35			913	113	1.60	2.6		
58	1693	25.03	1.57	R 97	4	1050	98	1.39	2.8		
65	1513	22.37	1.69	RF97	4						
72	1362	20.14	1.80			601	171	2.43	1.18		
80	1234	18.24	1.90			685	150	2.13	1.25	RX 77	4
90	1094	16.17	2.1			777	133	1.88	1.33	RXF77	4
100	989	14.62	2.2			874	118	1.67	1.38		
118	838	12.39	2.5			1028	100	1.42	1.46		

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
15kW						15kW					
6.1	20783	238	0.81			53	2540	27.54	1.1		
6.5	19560	224	0.87	R 167R107	4	58	2309	25.03	1.15		
7.0	18163	208	0.93	RF167R107	4	65	2063	22.37	1.24		
7.5	17028	195	0.99			72	1858	20.14	1.32		
8.3	15369	176	1.10			80	1682	18.24	1.40		
						90	1491	16.17	1.51	R 97	4
7.4	18201	130.44	0.93			100	1348	14.62	1.6	RF97	4
8.0	16883	120.99	1.00	R 167	6	118	1143	12.39	1.8		
9.2	14569	104.41	1.16	RF167	6	135	999	10.83	2.0		
11	12857	92.14	1.32			158	854	9.26	2.4		
						174	772	8.37	2.5		
7.4	18115	196.41	0.93			206	654	7.09	2.9		
9.1	14830	160.80	1.14			235	572	6.20	3.1		
11	12030	130.44	1.41								
12	11159	120.99	1.52	R 167	4	85	1575	17.08	0.89		
14	9630	104.41	1.76	RF167	4	95	1416	15.35	0.98		
16	8498	92.14	1.99			110	1229	13.33	1.05		
18	7367	79.88	2.3			122	1100	11.93	1.13	R 87	4
21	6555	71.07	2.6			147	913	9.90	1.21	RF87	4
23	5901	63.98	2.9			158	853	9.25	1.33		
25	5396	58.51	3.1			175	767	8.32	1.42		
						202	666	7.22	1.51		
8.8	15353	110.03	0.80			226	597	6.47	1.61		
10	13200	94.60	0.93	R 147	6	272	494	5.36	1.73		
12	11647	83.47	1.05	RF147	6						
13	10059	72.09	1.21			287	488	5.05	3.44	RX 157	4
14	9300	66.65	1.31			315	446	4.68	3.77	RXF157	4
						361	388	4.04	3.32		
8.9	15076	163.46	0.81								
9.9	13544	146.86	0.90			372	378	3.95	2.94	RX 127	4
12	10997	119.24	1.11							RXF127	4
13	10148	110.03	1.20								
15	8725	94.60	1.40	R 147	4	281	479	5.19	1.36		
17	7698	83.47	1.59	RF147	4	314	429	4.65	1.52		
20	6649	72.09	1.84			348	387	4.20	2.0		
22	6147	66.65	1.99			383	351	3.81	2.2		
24	5631	61.50	2.2			432	325	3.38	2.4	RX 107	4
28	4876	52.87	2.5			476	295	3.07	2.6	RXF107	4
31	4303	46.65	2.8			553	254	2.64	3.1		
						635	221	2.30	3.5		
14	9518	103.2	0.8			749	188	1.95	3.8		
16	8181	88.70	0.92			854	164	1.71	4.0		
18	7462	80.91	1.01			1014	138	1.44	4.4		
20	6778	73.49	1.11								
22	6013	65.20	1.25			323	435	4.52	1.3		
25	5457	59.17	1.38	R 137	4	361	388	4.04	1.4		
29	4691	50.86	1.60	RF137	4	401	350	3.64	1.6		
33	4094	44.39	1.84			442	317	3.30	1.8		
39	3472	37.65	2.2			500	281	2.92	2.0		
44	3035	32.91	2.5			553	254	2.64	2.2	RX 97	4
52	2567	27.83	2.9			652	215	2.24	2.6	RXF97	4
						745	188	1.96	2.8		
31	4340	47.06	0.9			890	158	1.64	3.0		
37	3678	39.88	1.10			1028	137	1.42	3.1		
42	3213	34.84	1.26								
48	2807	30.44	1.44			420	335	3.48	1.14		
50	2688	29.14	1.50	R 107	4	472	297	3.09	1.28		
54	2513	27.25	1.61	RF107	4	529	265	2.76	1.43		
59	2269	24.60	1.78			589	238	2.48	1.60	RX 87	4
65	2060	22.34	1.96			679	207	2.15	1.75	RXF87	4
74	1828	19.82	2.2			756	186	1.93	1.80		
81	1659	17.99	2.4			913	154	1.60	1.92		
94	1426	15.46	2.8			1050	134	1.39	2.0		
108	1245	13.50	3.2								



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
18.5kW						18.5kW					
9.1	18291	160.80	0.93			110	1516	13.33	0.8		
11	14838	130.44	1.13			122	1357	11.93	0.85		
12	13763	120.99	1.24			147	1126	9.90	0.98	R 87	4
14	11877	104.41	1.42			158	1052	9.25	1.08	RF87	4
16	10481	92.14	1.61	R 167	4	175	946	8.32	1.15		
18	9086	79.88	1.86	RF167	4	202	821	7.22	1.22		
21	8084	71.07	2.1			226	736	6.47	1.30		
23	7278	63.98	2.3			272	610	5.36	1.40		
25	6655	58.51	2.5								
29	5791	50.91	2.9			317	547	4.68	3.07	RX 157	4
						364	476	4.04	3.53	RXF157	4
						412	420	3.57	4.0		
12	13564	119.24	0.90			348	478	4.20	1.63		
13	12516	110.03	0.98			383	452	3.81	1.73		
15	10761	94.60	1.14			432	401	3.38	1.95		
17	9495	83.47	1.29			476	364	3.07	2.1		
20	8200	72.09	1.49	R 147	4	553	313	2.64	2.5	RX 107	4
22	7581	66.65	1.61	RF147	4	635	273	2.30	2.9	RXF107	4
24	6944	61.50	1.76			749	231	1.95	3.1		
28	6014	52.87	2.0			854	203	1.71	3.3		
31	5306	46.65	2.3			1014	171	1.44	3.6		
36	4583	40.29	2.7								
18	9203	80.91	0.82			401	432	3.64	1.30		
20	8359	73.49	0.90			442	391	3.30	1.43		
22	7416	65.20	1.01			500	346	2.92	1.62		
25	6731	59.17	1.12			553	313	2.64	1.79	RX 97	4
29	5785	50.86	1.30			652	266	2.24	2.1	RXF97	4
33	5049	44.39	1.49			745	232	1.96	2.3		
39	4283	37.65	1.76	R 137	4	890	194	1.64	2.4		
44	3744	32.91	2.0	RF137	4	1028	168	1.42	2.5		
49	3362	29.56	2.2								
52	3166	27.83	2.3			529	327	2.76	1.16		
61	2730	24.00	2.7			589	294	2.48	1.29	RX 87	4
66	2520	22.15	3.0			679	255	2.15	1.42	RXF87	4
77	2166	19.04	3.5			756	229	1.93	1.46		
87	1911	16.80	3.9			913	190	1.60	1.56		
						1050	165	1.39	1.65		
37	4536	39.88	0.89			22kW					
42	3963	34.84	1.02			11	17645	130.44	0.95		
50	3315	29.14	1.22			12	16366	120.99	1.04		
59	2798	24.60	1.44			14	14124	104.41	1.20		
65	2541	22.34	1.59			16	12464	92.14	1.36		
74	2255	19.82	1.79			18	10805	79.88	1.57		
81	2046	17.99	1.98	R 107	4	21	9614	71.07	1.76	R 167	4
94	1759	15.46	2.3	RF107	4	23	8655	63.98	2.0	RF167	4
108	1536	13.50	2.3			25	7915	58.51	2.1		
128	1302	11.45	3.1			29	6887	50.91	2.5		
146	1139	10.01	3.5			32	6078	44.93	2.8		
181	918	8.07	3.0			37	5269	38.95	3.2		
213	778	6.84	3.6								
72	2291	20.14	1.07			13	14884	110.03	0.83		
80	2075	18.24	1.13			15	12797	94.60	0.95		
90	1839	16.17	1.23			17	11291	83.47	1.08		
100	1663	14.62	1.30			20	9752	72.09	1.3		
118	1409	12.39	1.46	R 97	4	22	9016	66.65	1.36	R 147	4
135	1232	10.83	1.59	RF97	4	24	8258	61.50	1.48	RF147	4
158	1053	9.26	1.81			28	7152	52.87	1.71		
174	952	8.37	2.0			31	6310	46.65	1.94		
206	806	7.09	2.3			36	5450	40.29	2.2		
235	705	6.20	2.5			41	4821	35.64	2.5		
282	589	5.18	2.8			49	4051	29.95	3.0		
328	511	4.49	3.0								

R



R

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
22kW						22kW					
22	8820	65.20	0.85			652	316	2.24	1.77		
25	8004	59.17	0.94			745	276	1.96	1.94	RX 97	4
29	6880	50.86	1.09			890	231	1.64	2.05	RXF97	4
33	6005	44.39	1.25			1028	200	1.42	2.14		
39	5093	37.65	1.48								
44	4452	32.91	1.69			529	389	2.76	0.98		
49	3999	29.56	1.88	R 137	4	589	350	2.48	1.09		
52	3765	27.83	2.00	RF137	4	679	303	2.15	1.19	RX 87	4
61	3246	24.00	2.3			756	272	1.93	1.23	RXF87	4
66	2996	22.15	2.5			913	226	1.60	1.31		
77	2576	19.04	2.9			1050	196	1.39	1.39		
87	2273	16.80	3.3								
101	1963	14.51	3.8								
114	1736	12.83	4.3								
30kW						30kW					
42	4713	34.84	0.86			16	16996	92.14	1.0		
50	3942	29.14	1.03			18	14735	79.88	1.15		
59	3328	24.60	1.21			21	13109	71.07	1.29		
65	3022	22.34	1.34			23	11802	63.98	1.43		
74	2681	19.82	1.51			25	10793	58.51	1.57	R 167	4
81	2434	17.99	1.66			29	9391	50.91	1.80	RF167	4
94	2091	15.46	1.93	R 107	4	32	8288	44.93	2.04		
108	1826	13.50	2.2	RF107	4	37	7185	38.95	2.4		
128	1549	11.45	2.6			42	6393	34.66	2.6		
146	1354	10.01	2.7			49	5510	29.87	3.1		
173	1144	8.46	2.9			60	4477	24.27	3.8		
181	1092	8.07	3.0			71	3796	20.58	4.5		
213	925	6.84	3.2								
244	809	5.98	3.5								
72	2724	20.14	1.04			17	15397	83.47	0.8		
80	2467	18.24	1.14			20	13298	72.09	0.92		
90	2187	16.17	1.23			22	12294	66.65	0.99		
100	1978	14.62	1.29			24	11261	61.50	1.09		
118	1676	12.39	1.34			28	9752	52.87	1.25		
135	1465	10.83	1.43	R 97	4	31	8605	46.65	1.42		
158	1253	9.26	1.52	RF97	4	36	7432	40.29	1.64	R 147	4
174	1132	8.37	1.69			41	6574	35.64	1.86	RF147	4
206	959	7.09	1.96			49	5525	29.95	2.2		
235	839	6.20	2.1			60	4462	24.19	2.5		
282	701	5.18	2.4			71	3770	20.44	3.0		
325	607	4.49	2.5			81	3328	18.04	3.0		
						93	2885	15.64	4.2		
147	1339	9.90	0.83			29	9382	50.86	0.80		
158	1251	9.25	0.91			33	8188	44.39	0.92		
175	1125	8.32	0.97	R 87	4	39	6945	37.65	1.08		
202	977	7.22	1.03	RF87	4	44	6071	32.91	1.24		
226	875	6.47	1.10			52	5133	27.83	1.41		
272	725	5.36	1.18			61	4427	24.00	1.69		
						66	4086	22.15	1.85	R 137	4
412	500	3.57	3.36	RX 157	4	77	3512	19.04	2.1	RF137	4
						87	3099	16.80	2.4		
348	592	4.20	1.32			101	2676	14.51	2.8		
383	537	3.81	1.45			114	2367	12.83	3.2		
432	477	3.38	1.64			135	1990	10.79	3.8		
476	433	3.07	1.80			192	1400	7.59	3.4		
553	372	2.64	2.10	RX 107	4	229	1177	6.38	4.1		
635	324	2.30	2.41	RXF107	4						
749	275	1.95	2.61			74	3656	19.82	1.11		
854	241	1.71	2.75			81	3318	17.99	1.22		
1014	203	1.44	2.99			94	2852	15.46	1.42		
						108	2490	13.50	1.62		
401	513	3.64	1.09			128	2112	11.45	1.88		
442	465	3.30	1.20	RX 97	4	146	1846	10.01	1.91	R 107	4
500	412	2.92	1.36	RXF97	4	173	1561	8.46	2.2	RF107	4
553	372	2.64	1.50			181	1489	8.07	2.2		
						213	1262	6.84	2.5		
						244	1103	5.98	2.6		
						289	933	5.06	2.9		



Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
30kW						37kW					
100	2697	14.62	0.80			39	8507	37.65	0.88		
118	2285	12.39	0.90			45	7436	32.91	1.01		
135	1998	10.83	0.98			53	6288	27.83	1.20		
158	1708	9.26	1.12	R 97	4	61	5423	24.00	1.38		
174	1544	8.37	1.24	RF97	4	67	5005	22.15	1.51		
206	1308	7.09	1.44			77	4302	19.04	1.75	R 137	4
235	1144	6.20	1.55			88	3796	16.80	1.98	RF137	4
282	955	5.18	1.75			101	3279	14.51	2.3		
325	828	4.49	1.85			115	2899	12.83	2.6		
						136	2438	10.79	2.8		
432	649	3.40	1.71	RX 127	4	169	1968	8.71	3.1		
				RXF127	4	194	1715	7.59	3.3		
						230	1442	6.38	3.7		
432	623	3.38	1.25			285	1164	5.15	3.7		
476	566	3.07	1.38								
553	487	2.64	1.60	RX 107	4	74	4478	19.82	0.90		
635	424	2.30	1.84	RXF107	4	82	4065	17.99	0.99		
749	360	1.95	2.0			95	3493	15.46	1.16		
854	315	1.71	2.1			109	3050	13.50	1.33		
1014	266	1.44	2.3			128	2587	11.45	1.50		
						147	2262	10.01	1.56	R 107	4
500	539	2.92	1.04			174	1912	8.46	1.79	RF107	4
553	487	2.64	1.15			182	1823	8.07	1.8		
652	413	2.24	1.35	RX 97	4	215	1546	6.84	2.1		
745	362	1.96	1.48	RXF97	4	246	1351	5.98	2.1		
890	303	1.64	1.57			291	1143	5.06	2.4		
1028	262	1.42	1.63								
						432	801	3.40	1.39		
						490	707	3.00	1.57	RX 127	4
						568	610	2.59	1.82	RXF127	4
						435	796	3.38	0.98		
						479	723	3.07	1.08		
						557	622	2.64	1.25	RX 107	4
						639	542	2.30	1.44	RXF107	4
						754	459	1.95	1.57		
						860	403	1.71	1.65		
						1021	339	1.44	1.79		
						45kW					
						23	17463	63.98	0.97		
						25	15970	58.51	1.06		
						29	13896	50.91	1.22		
						33	12264	44.93	1.38		
						38	10631	38.95	1.59		
						43	9460	34.66	1.79		
						50	8153	29.87	2.08	R 167	4
						61	6624	24.27	2.4	RF167	4
						72	5617	20.58	2.6		
						79	5112	18.73	3.0		
						91	4452	16.31	3.4		
						102	3974	14.56	3.5		
						28	14431	52.87	0.85		
						32	12733	46.65	0.96		
						37	10997	40.29	1.11		
						42	9728	35.64	1.26		
						49	8175	29.95	1.49		
						61	6603	24.19	1.69		
						72	5579	20.44	2.0	R 147	4
						82	4924	18.04	2.0	RF147	4
						95	4269	15.64	2.9		
						106	3797	13.91	3.2		
						123	3273	11.99	3.7		
						204	1979	7.25	4.1		

R



Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
90kW											
72	11158	20.44	1.01								
82	9848	18.04	1.10								
95	8538	15.64	1.43								
106	7593	13.91	1.56	R 147	4						
123	6545	11.99	1.87	RF147	4						
156	5170	9.47	2.1								
179	4509	8.26	2.4								
204	3958	7.25	2.5								
251	3215	5.89	2.7								
296	2729	5.00	3.0								
542	1555	2.75	1.08	RX 157	4						
629	1340	2.37	1.25	RXF157	4						
772	1091	1.93	1.54								
955	882	1.56	1.26	RX 127	4						
				RXF127	4						
110kW											
61	16193	24.27	1.04								
72	13731	20.58	1.23								
91	10882	16.31	1.38	R 167	4						
102	9715	14.56	1.45	RF167	4						
119	8280	12.41	2.04								
144	6859	10.28	2.3								
169	5851	8.77	2.7								
629	1638	2.37	1.03	RX 157	4						
772	1334	1.93	1.26	RXF157	4						
914	1126	1.63	1.49								
132kW											
72	16477	20.58	1.03								
91	13059	16.31	1.15								
102	11657	14.56	1.21	R 167	4						
119	9936	12.41	1.70	RF167	4						
144	8231	10.28	1.94								
169	7022	8.77	2.28								
914	1351	1.63	1.24	RX 157	4						
				RXF157	4						
160kW											
120	11963	12.41	1.41	R 167	4						
145	9910	10.28	1.61	RF167	4						
170	8484	8.77	1.89								

R



R

Permissible torque Nm	Output speed r/min	Ratio i	Type		Power kW/4p	Permissible torque Nm	Output speed r/min	Ratio i	Type		Power kW/4p		
			Type	Type					Type	Type			
130	8.5	164	R 27R17 RF27R17		0.18	1550	0.82	1690	R 87R57 RF87R57		0.18		
	8.9	156					0.91	1524					
	10	135					1.0	1395					
	12	118			1.1		1232	0.25					
	13	104			1.2		1145						
	15	90			1.3		1037						
200	4.8	289	R 37R17 RF37R17		0.18		1.6	883			R 87R57 RF87R57		0.37
	5.7	243					1.7	802					
	6.2	226					1.8	754					
	7.5	185			1.4		1008	0.55					
	8.5	164			2.0		683						
	8.9	156			2.3		599						
10	135	2.6	538	0.75									
11	127	2.9	472										
13	104	3.4	400										
300	3.2	429	R 47R37 RF47R37		0.18	3.5	396	R 87R57 RF87R57		0.75			
	3.7	372				3.9	361						
	4.0	348				4.0	351						
	4.6	301			4.6	305	1.1						
	5.5	255			4.7	300							
	6.1	228			5.2	267							
450	2.1	678	R 57R37 RF57R37		0.18	5.5	256	R 97R57 RF97R57		0.18			
	2.4	589				0.32	4309						
	2.6	537				0.35	4004						
	3.0	471			0.38	3702	0.25						
	3.9	357			0.40	3481							
	4.4	319			0.46	3019							
5.2	267	0.52	2668	0.37									
5.8	241	0.62	2245										
0.62	2245	0.69	2016										
600	1.7	836	R 67R37 RF67R37		0.18	0.76	1823	R 97R57 RF97R57		0.37			
	1.9	750				0.80	1733						
	2.0	730				0.86	1623						
	2.2	630			0.88	1583	0.55						
	2.4	571			0.97	1434							
	2.5	561			1.00	1396							
2.8	495	1.1	1228	0.75									
2.9	486	1.2	1207										
3.2	438	1.3	1084										
3.6	388	1.3	1068	1.1									
4.1	336	1.5	937										
4.8	287	1.5	934										
820	1.2	1124	R 77R37 RF77R37		0.18	1.6	878	R 97R57 RF97R57		0.75			
	1.3	1047				1.7	824						
	1.5	915				1.8	755						
	1.6	858			1.9	737	1.1						
	1.8	757			2.1	631							
	2.1	671			2.2	625							
2.4	571	2.5	549	1.5									
2.5	547	2.6	560										
2.9	477	2.9	484										
3.3	426	3.2	430	2.2									
3.8	364	3.7	379										
4.5	312	4.1	336										
1550	4.5	310	R 87R57 RF87R57		0.55	4.7	296	R 97R57 RF97R57		1.5			
	5.6	248				4.1	336						
	0.65	2129				4.7	296						
	0.71	1955			5.1	270	2.2						
	0.72	1930			5.6	249							
	0.79	1737			5.9	234							
0.80	1733	6.1	227										



Permissible torque Nm	Output speed r/min	Ratio i	Type Type	Power kW/4p	Permissible torque Nm	Output speed r/min	Ratio i	Type Type	Power kW/4p
4300	0.21	6690	R 107R77 RF107R77	0.18	8000	0.34	4018	R 137R77 RF137R77	0.37
	0.24	5735				0.35	3928		
	0.27	5127				0.40	3514		
	0.32	4302				0.41	3377		
	0.36	3870		0.42		3338	0.55		
	0.36	3847		0.47		2929			
	0.42	3302		0.48		2926			
	0.46	3015		0.52		2658			
	0.46	2997		0.56		2484	0.75		
	0.53	2621		0.58		2412			
	0.62	2252		0.62		2242			
	0.68	2041		0.67		2073			
	0.71	1971		0.75		1863	1.1		
	0.77	1813		0.76		1839			
	0.83	1673		0.88		1598			
	0.88	1587		1.0		1397			
	0.91	1531		1.1		1226	1.5		
	1.00	1390		1.3		1090			
	1.00	1389		1.3		1080			
	1.14	1216		1.4		1020			
	1.2	1194		1.5		951	2.2		
	1.27	1095		1.6		869			
	1.3	1043		1.7		831			
	1.50	927		2.0		730			
	1.6	888		2.1		684	3		
	1.7	787		2.3		629			
	2.0	692		2.3		609			
	2.3	605		2.6		564			
	2.4	598		2.6		549	4		
	2.6	530		2.8		517			
	2.7	510		2.9		490			
	2.9	479		3.2		453			
3.1	463	3.4	428	5.5					
3.4	420	3.8	376						
3.5	406	3.8	374						
3.8	373	4.2	339						
4.0	357	4.5	317	0.18					
4.5	321	4.8	297						
4.6	313	5.0	286						
5.1	281	5.8	250						
5.2	277	0.08	18210	0.25					
5.7	253	0.09	15923						
5.8	245	0.10	14075						
6.6	217	0.12	12344						
6.9	208	0.13	11143	0.37					
7.5	191	0.15	9743						
7.9	181	0.17	8443						
8.6	167	0.20	7307						
8000	0.12	11712	R 147R77 RF147R77	0.18	13000	0.22	6447	0.37	
	0.13	10573				0.26	5568		
	0.16	8784				0.30	4815		
	0.19	7479				0.33	4325		
	0.22	6412		0.39		3669	0.55		
	0.24	5834		0.44		3228			
	0.28	5001		0.50		2833			
	0.30	4709		0.37					
0.32	4364	0.37		0.75					

R

All gear units are overloaded in above table. Determination of operating torque should not higher than the gear unit's nominal torque.




R

Permissible torque Nm	Output speed r/min	Ratio i	Type		Power kW/4p	Permissible torque Nm	Output speed r/min	Ratio i	Type		Power kW/4p
			Type	Type					Type	Type	
13000	0.56	2555	R 147R77 RF147R77		1.1		4.9	295	R 167R107 RF167R107		11
	0.65	2211					5.1	287			
	0.73	1951					5.2	281			
	0.84	1705			1.5		5.6	260			
	0.93	1536					6.1	238			
	1.1	1329					6.5	224			
	1.2	1166			2.2		7.0	208			15
	1.4	1029					7.5	195			
	1.6	889									
	1.8	784			3						
	2.1	695									
	2.4	607									
	2.6	547	4								
	3.0	480									
	2.7	540									
	3.1	462	R 147R87 RF147R87		5.5						
	3.3	432									
	3.9	373									
	4.4	330	7.5								
	6.8	216		11							
18000	0.05	27001				0.55					
	0.06	22482									
	0.07	20002									
	0.08	17361									
	0.09	15446									
	0.10	14051									
	0.12	11812									
	0.13	10519									
	0.14	9754									
	0.23	6069									
	0.26	5399	0.75								
	0.30	4709									
	0.33	4182									
	0.18	7749	1.1								
	0.20	6894									
	0.37	3739									
	0.54	2657	1.5								
	0.61	2333									
	0.69	2085									
	0.76	1877	R 167R97 RF167R97		2.2						
	0.86	1670									
	0.98	1456									
	1.1	1296	3								
	1.3	1137									
	1.4	1012									
	1.7	872	4								
1.9	770										
2.2	664	5.5									
2.5	578										
2.8	510	7.5									
3.3	438										
3.8	380										
4.3	338										
4.8	307	11									
5.2	282										


All gear units are overloaded in above table. Determination of operating torque should not higher than the gear unit's nominal torque.




RX37

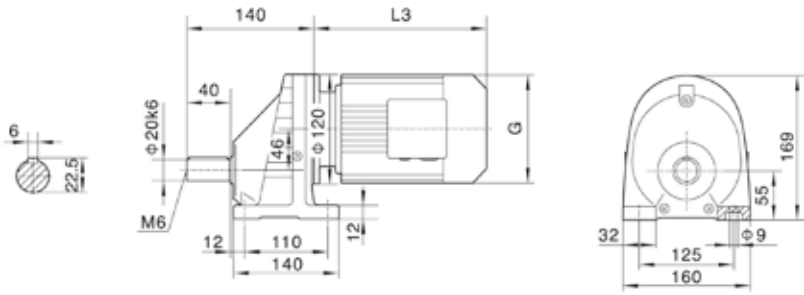


RX..S37

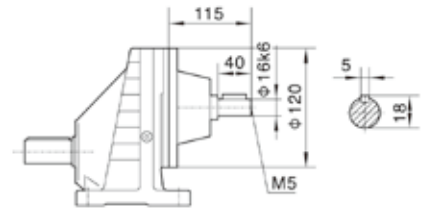

RXF37

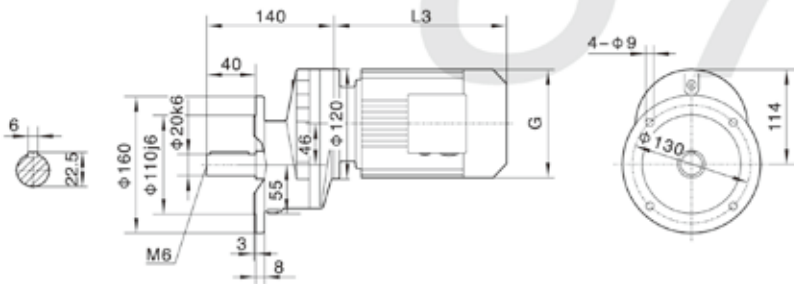

Customers provide the motor by themselves need connected flange.



Note: For other values please refer to relevant structure.


R

Motor size	63	71	80	90S	
Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	
L3	223	236	264	301	
G	130	145	175	195	
L2	71	71	71	71	


Note: "RX.." means RX, RXF.



RX57

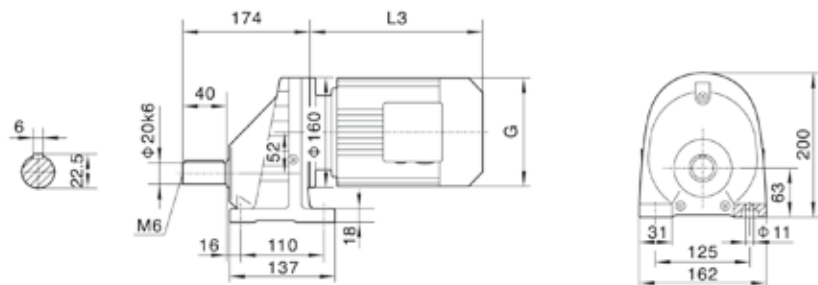


RX..S57

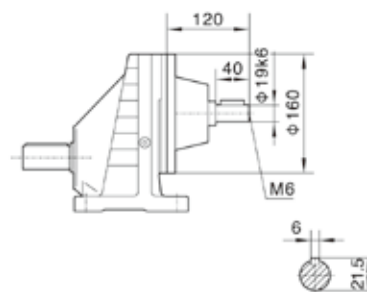


RXF57


Φ 140

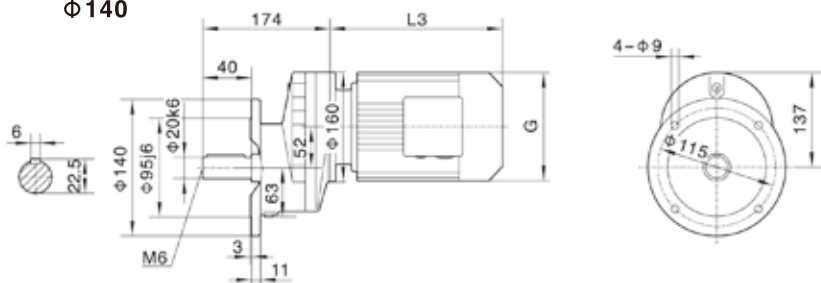


Φ 160

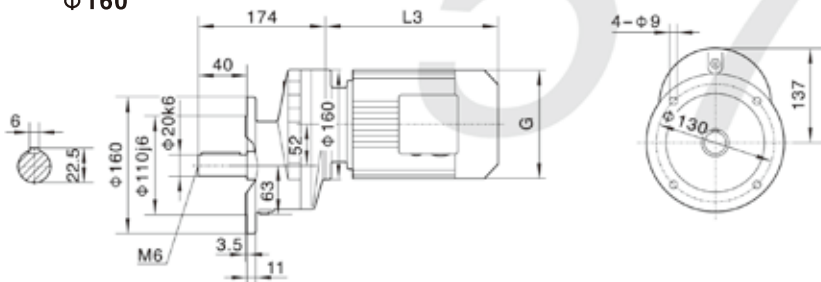

Φ 200

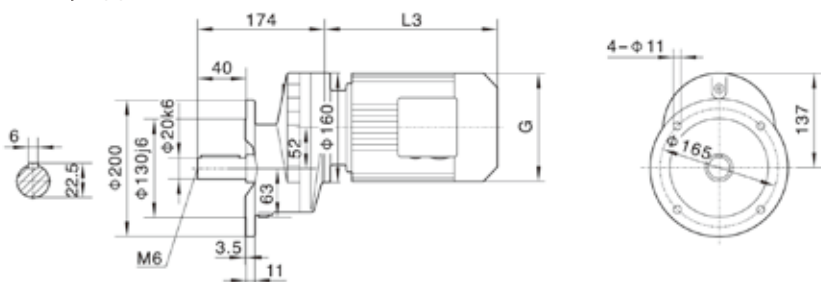

Customers provide the motor by themselves need connected flange.




Note: For other values please refer to relevant structure.

Motor size	63	71	80	90S	90L	100	112M	132S			
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5
L3	223	245	278	304	328	350	380	425			
G	130	145	175	195	195	215	240	275			
L2	81	81	81	81	81	93	93	101			


Note: "RX.." means RX, RXF.



RX67

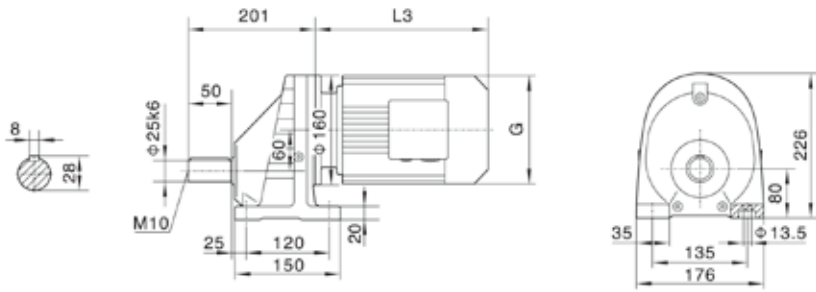


RX..S67

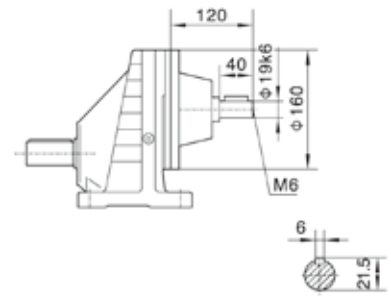


RXF67


Φ 160

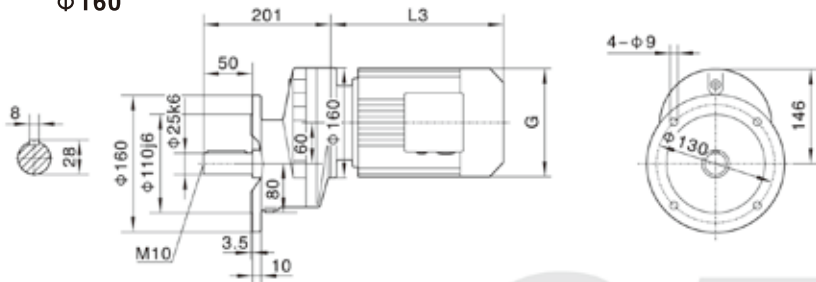


Φ 200

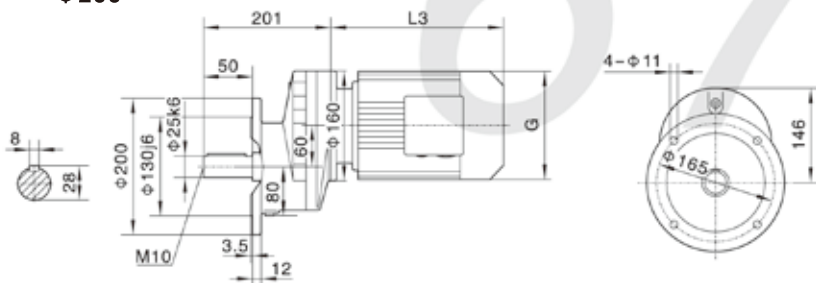

Φ 250

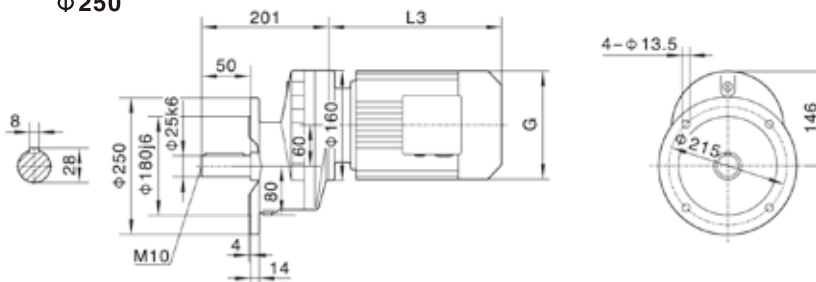

Customers provide the motor by themselves need connected flange.




Note: For other values please refer to relevant structure.

Motor size	63	71	80	90S	90L	100	112M	132S	132M	
Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	
L3	223	245	278	304	328	350	380	425	461	
G	130	145	175	195	195	215	240	275	275	
L2	81	81	81	81	81	93	93	101	101	


Note: "RX.." means RX, RXF.



RX77

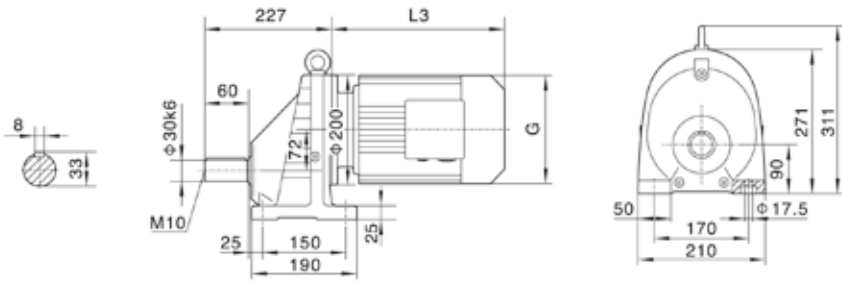


RX..S77





RXF77


Φ 200

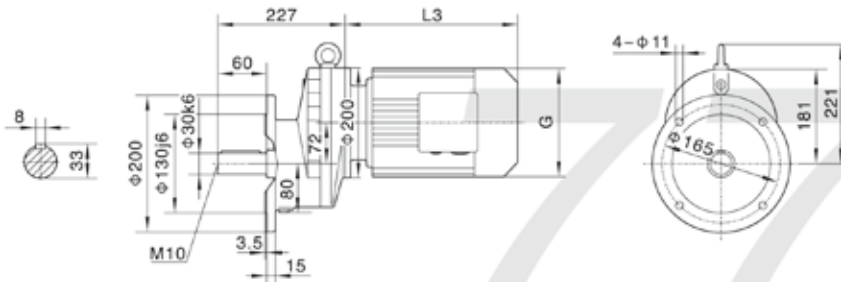

Φ 250

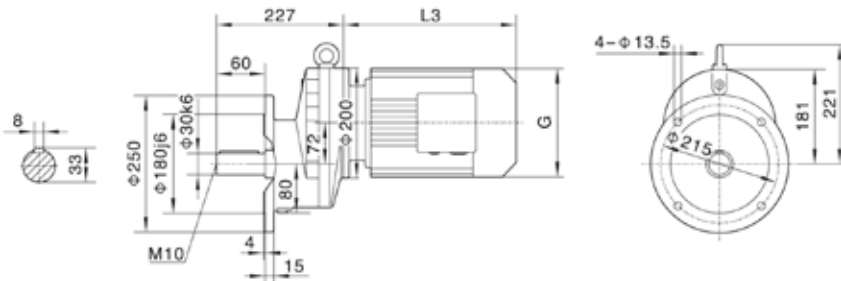

Customers provide the motor by themselves need connected flange.



Note: For other values please refer to relevant structure.


R

Motor size	90S	90L	100	112M	132S	132M	160M	
Power/(kW)	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	
L3	304	328	350	380	425	461	524	
G	195	195	215	240	275	275	330	
L2	81	81	93	93	101	101	126	


Note: "RX.." means RX, RXF.



RX87

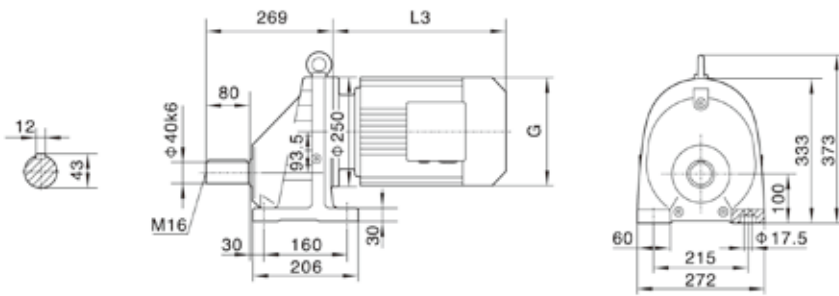


RX..S87

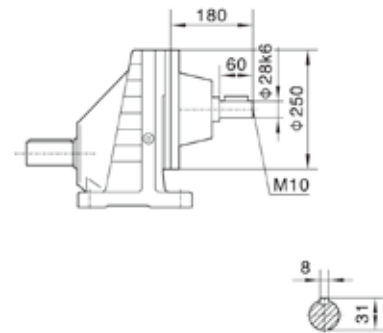


RXF87

Φ250

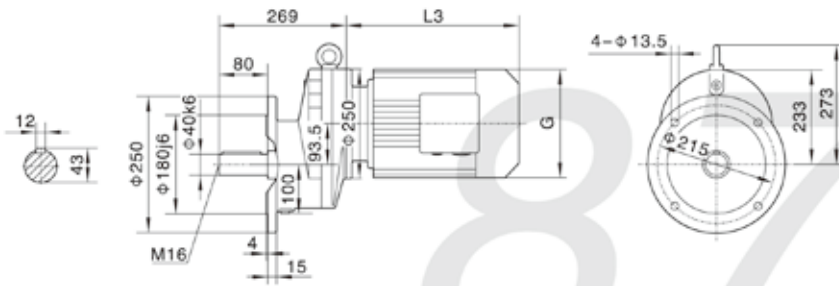


Customers provide the motor by themselves need connected flange.

Φ300

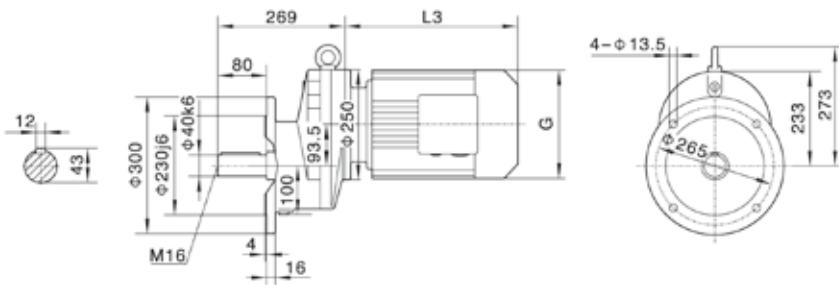

Note: For other values please refer to relevant structure.




Motor size	100	112M	132S	132M	160M	160L	180M	180L	
Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	
L3	351	380	425	461	524	547	583	616	
G	215	240	275	275	330	330	380	380	
L2	71	71	101	101	126	126	126	126	

Note: "RX.." means RX, RXF.


R




RX97

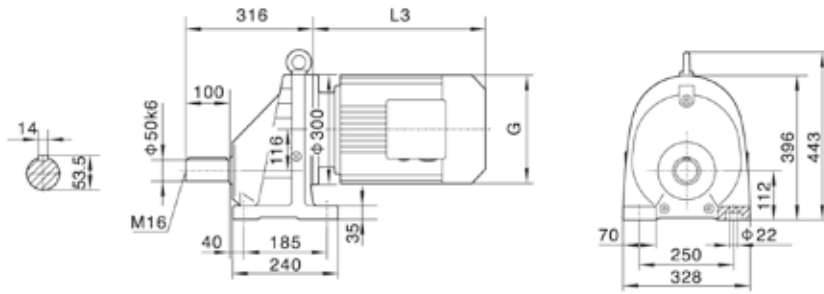


RX..S97

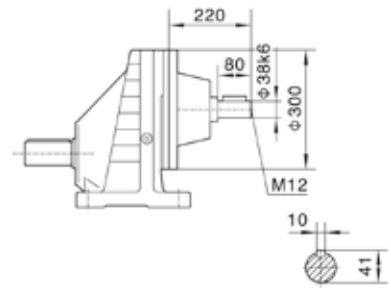

RXF97

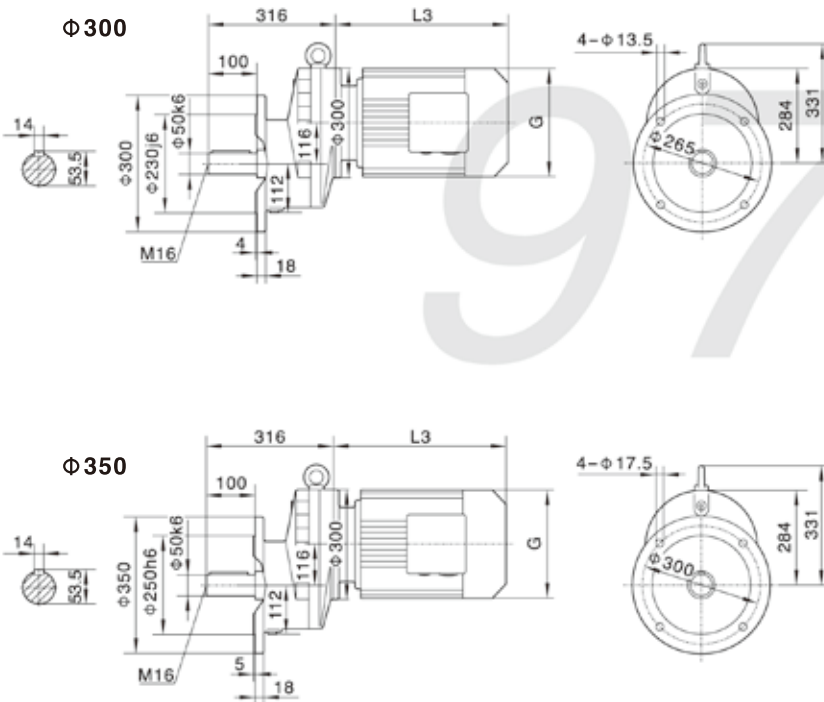

Customers provide the motor by themselves need connected flange.




Note: For other values please refer to relevant structure.

Motor size	132S	132M	160M	160L	180M	180L	200	
Power/(kW)	5.5	7.5	11	15	18.5	22	30	
L3	425	461	524	547	555	588	654	
G	275	275	330	330	380	380	420	
L2	101	101	126	126	126	126	126	


Note: "RX.." means RX, RXF.



RX107

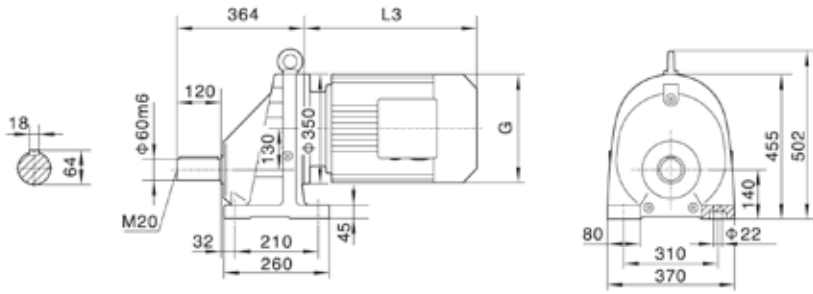


RX..S107

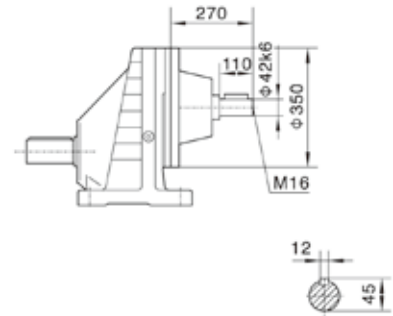


RXF107


Φ350

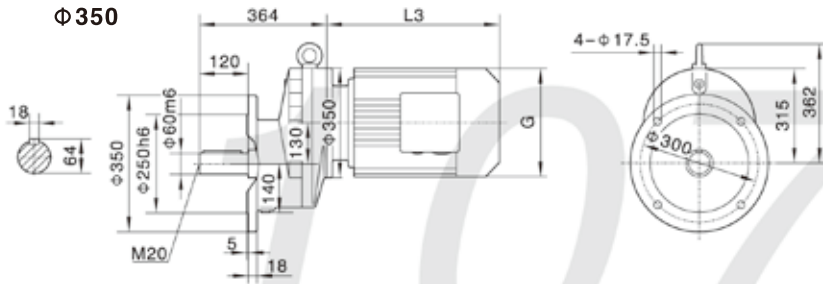

Φ450

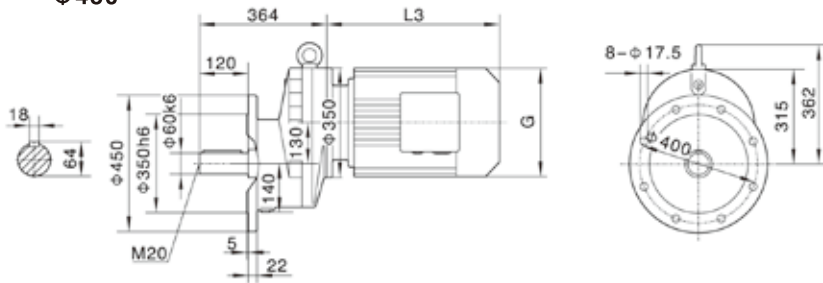

Customers provide the motor by themselves need connected flange.



Note: For other values please refer to relevant structure.


Motor size	132M	160M	160L	180M	180L	200	225S	225M	
Power(kW)	7.5	11	15	18.5	22	30	37	45	
L3	422	504	519	555	588	654	680	702	
G	275	330	330	380	380	420	470	470	
L2	101	126	126	126	126	132	132	132	

Note: "RX.." means RX, RXF.


R



RX127


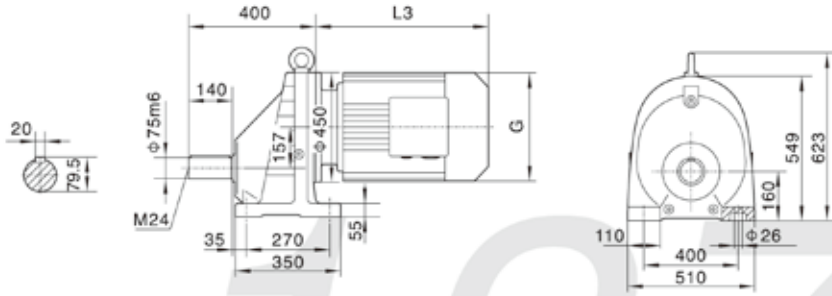


RX..S127

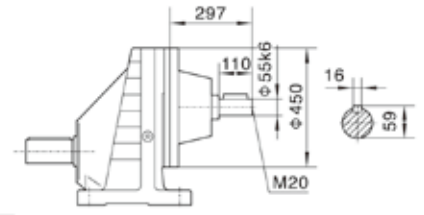

Customers provide the motor by themselves need connected flange.


RXF127

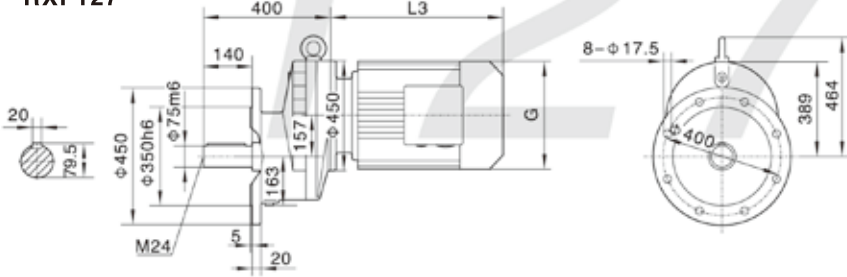


Note: For other values please refer to relevant structure.

Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	845	845
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	120	120	120

RX157


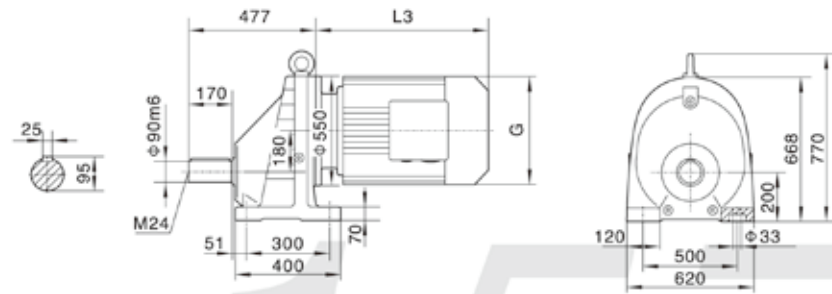


RX..S157

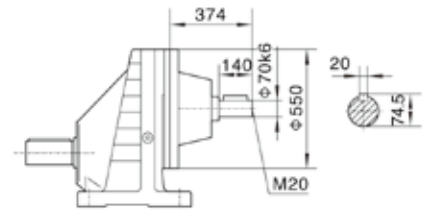

Customers provide the motor by themselves need connected flange.

RXF157

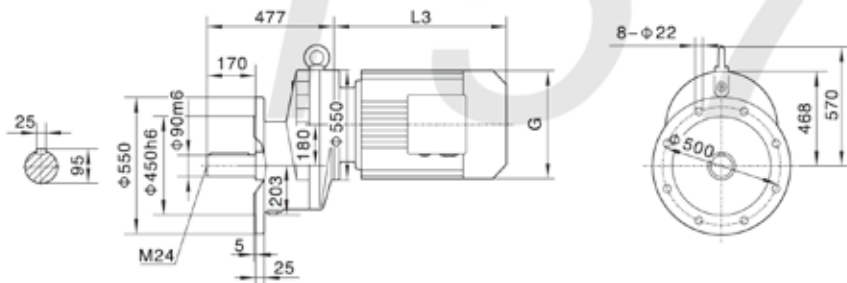


Note: For other values please refer to relevant structure.

Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M
Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132
L3	567	602	635	666	642	669	691	770	828	879	1100	1130
G	330	330	380	380	420	470	470	510	580	580	645	645
L2	143	143	143	143	143	143	143	143	143	143	145	145


Note: "RX.." means RX, RXF.



R17

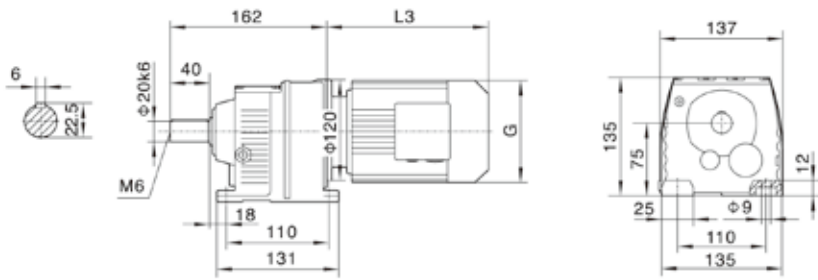


Customers provide the motor by themselves need connected flange.




RF17

Φ 120

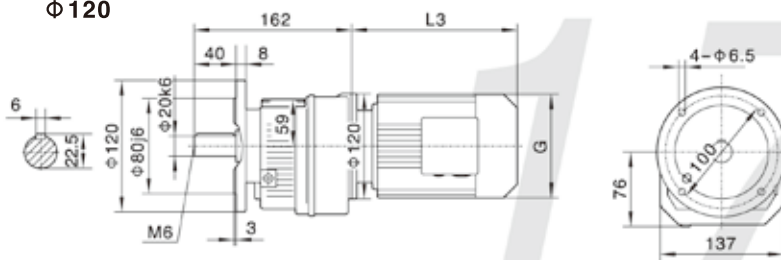

Φ 140

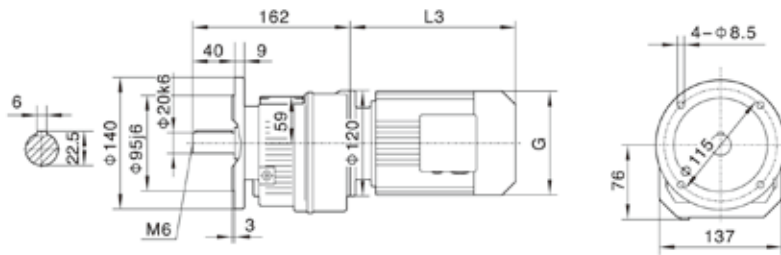

Note: For other values please refer to relevant structure.


R

Motor size	63	71		80							
Power(kW)	0.18	0.25	0.37	0.55	0.75						
L3	235	245		278							
G	130	145		175							
L2	71	71		71							


Note: "R.." means R, RF.




R27

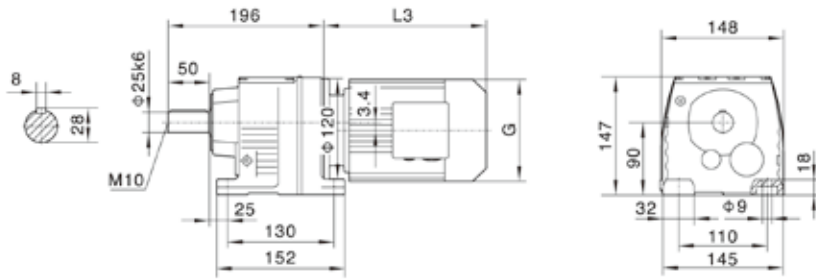



Customers provide the motor by themselves need connected flange.




RF27

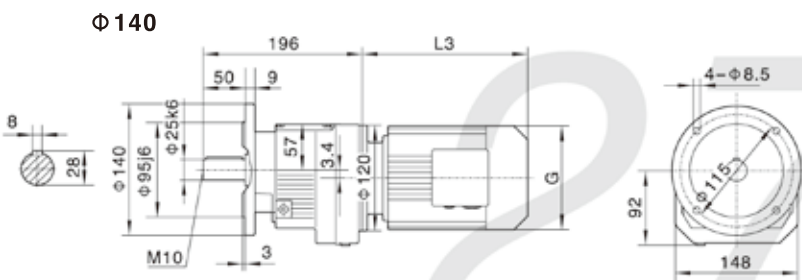

R..S27

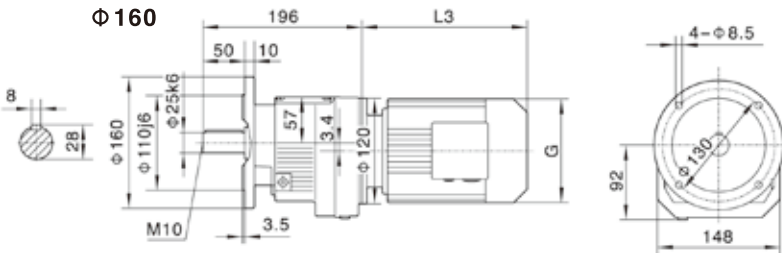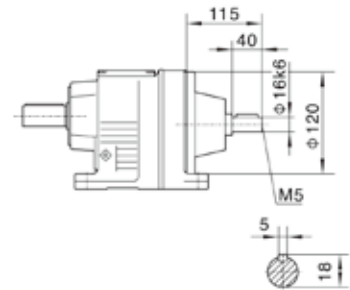

R..27R17

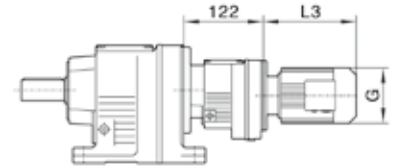


Note: For other values please refer to relevant structure.

Motor size	63	71		80	90S	90L	100	
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2 3.0
L3	235	245		278		304	328	340
G	130	145		175		195	195	215
L2	71	71		71		71	71	93


Note: "R.." means R, RF.



R37

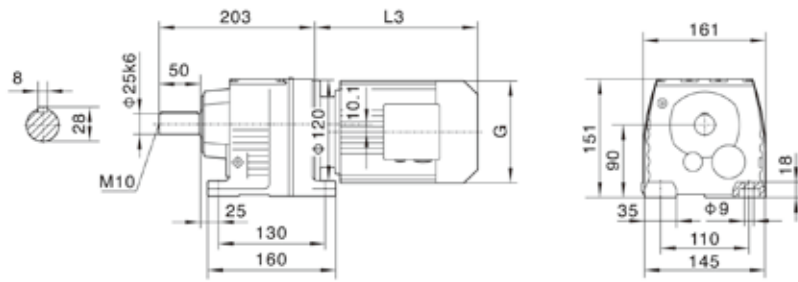


Customers provide the motor by themselves need connected flange.




RF37


$\Phi 160$

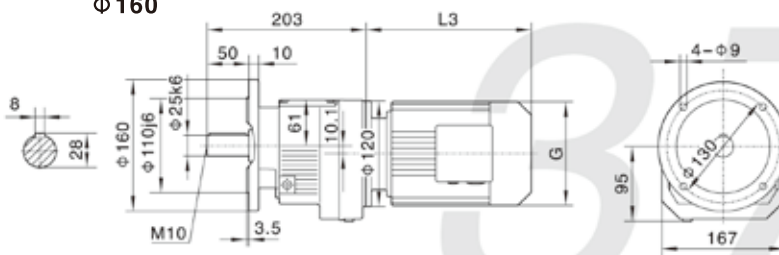


R..S37



$\Phi 200$

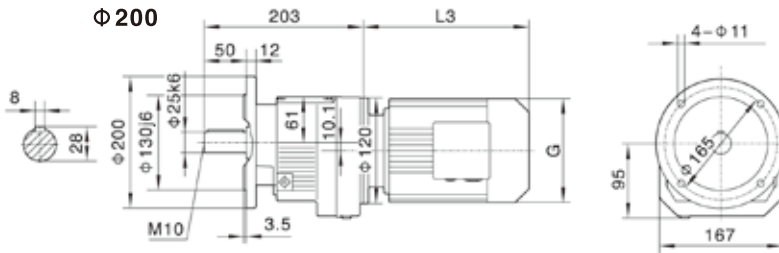

R..37R17

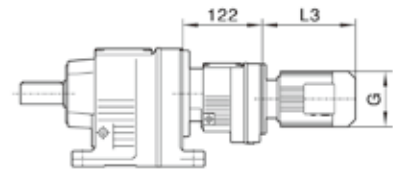

Note: For other values please refer to relevant structure.


Motor size	63	71		80	90S	90L	100L	
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2 3.0
L3	235	245		278		304	328	340
G	130	145		175		195	195	215
L2	71	71		71		71	71	93

Note: "R.." means R, RF.


R




R47

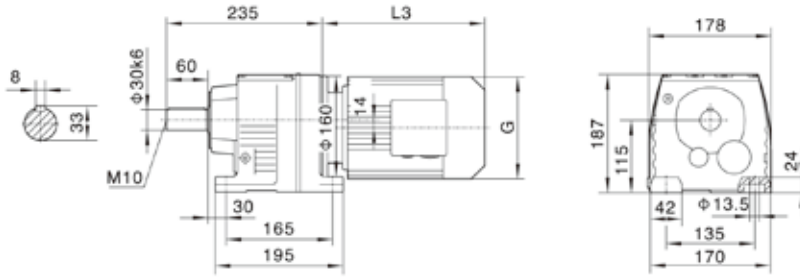



Customers provide the motor by themselves need connected flange.




RF47

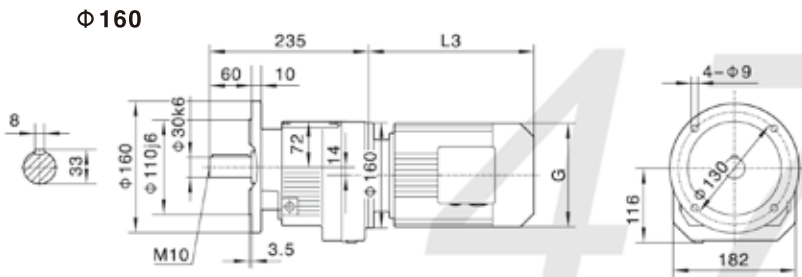

R..S47

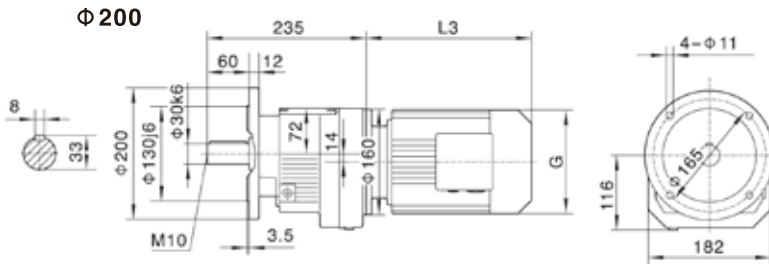

R..47R37

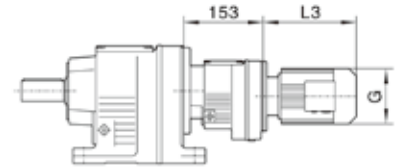


Note: For other values please refer to relevant structure.

Motor size	63	71		80	90S	90L	100		112M	132S	
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5
L3	223	245		278		304	328	350		380	425
G	130	145		175		195	195	215		240	275
L2	81	81		81		81	81	93		93	101


Note: "R.." means R, RF.



R57

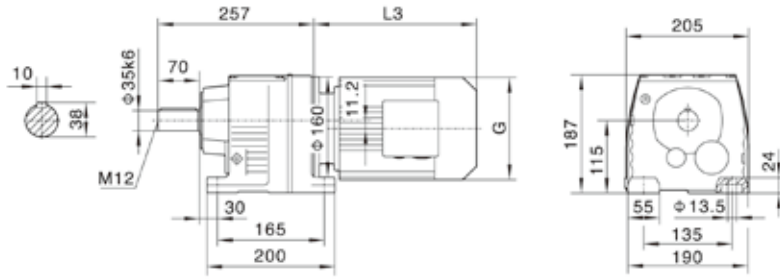


Customers provide the motor by themselves need connected flange.




RF57


Φ 200

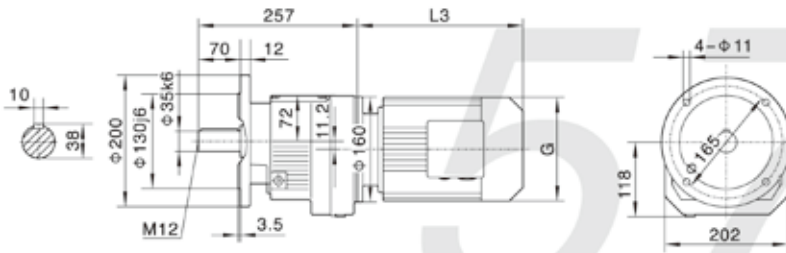


R..S57



Φ 250

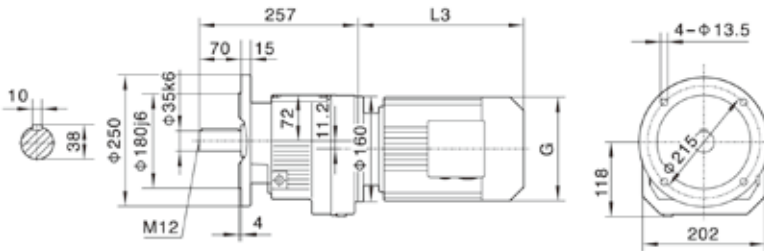

R..57R37

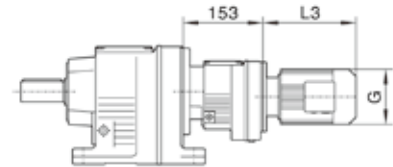

Note: For other values please refer to relevant structure.


Motor size	63	71		80	90S	90L	100L		112M	132S	132M	
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5
L3	223	245		278	304	328	350		380	425	461	
G	130	145		175	195	195	215		240	275	275	
L2	81	81		81	81	81	93		93	101	101	

Note: "R.." means R, RF.


R



R67

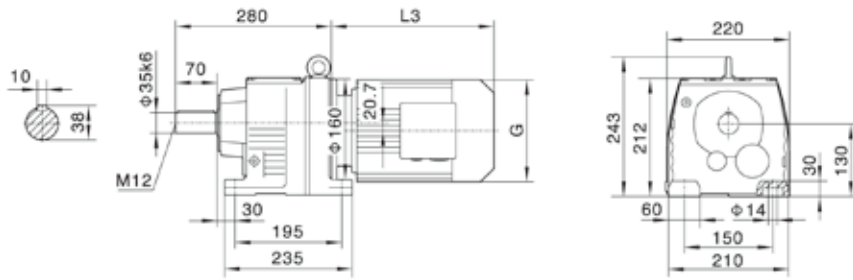


Customers provide the motor by themselves need connected flange.




RF67


Φ 200

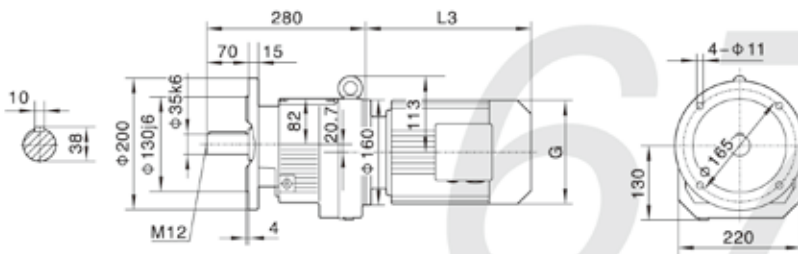


R..S67

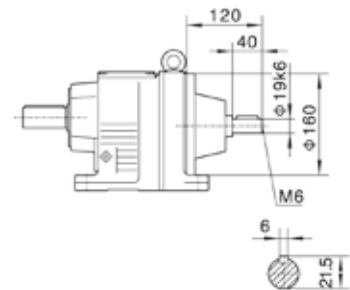

Φ 250

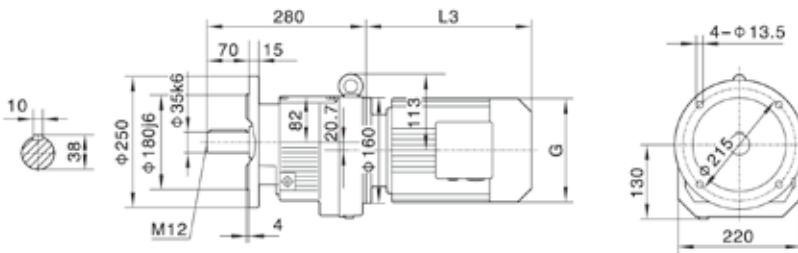

R..67R37

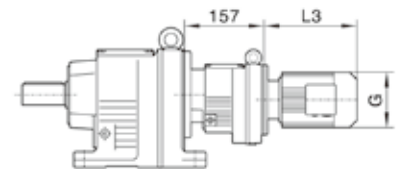

Note: For other values please refer to relevant structure.


Motor size	63	71		80		90S	90L	100L		112M	132S	132M	
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	
L3	223	245		278		304	328	350		380	425	461	
G	130	145		175		195	195	215		240	275	275	
L2	81	81		81		81	81	93		93	101	101	

Note: "R.." means R, RF.


R



R77

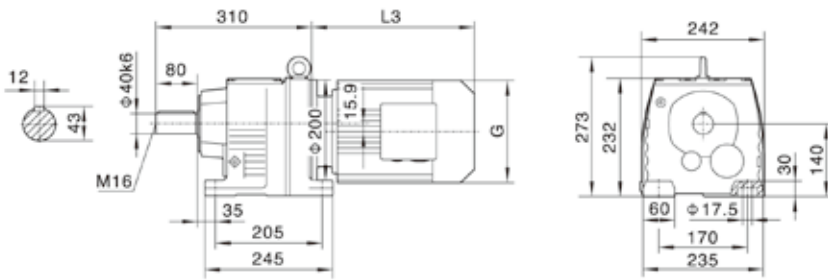


Customers provide the motor by themselves
need connected flange.




RF77


Φ 250

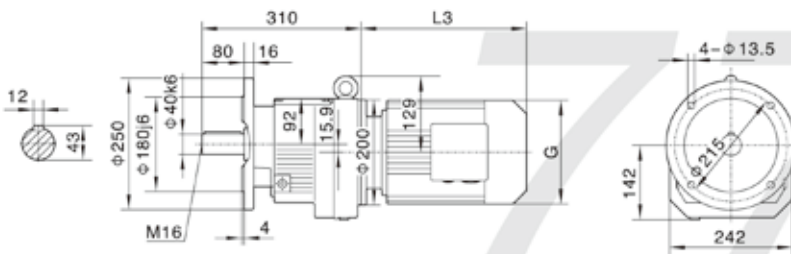


R..S77



Φ 300

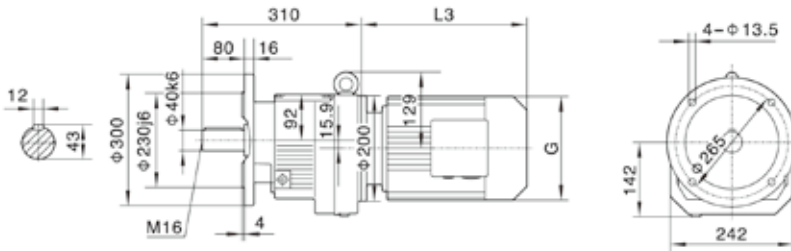

R..77R37

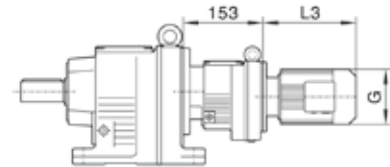

Note: For other values please refer to relevant structure.


Motor size	63	71		80		90S	90L	100L		112M	132S	132M	160M
Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11
L3	223	233		278		304	328	350		380	425	461	524
G	130	145		175		195	195	215		240	275	275	330
L2	81	81		81		81	81	93		93	101	101	126

Note: "R.." means R, RF.


R



R87

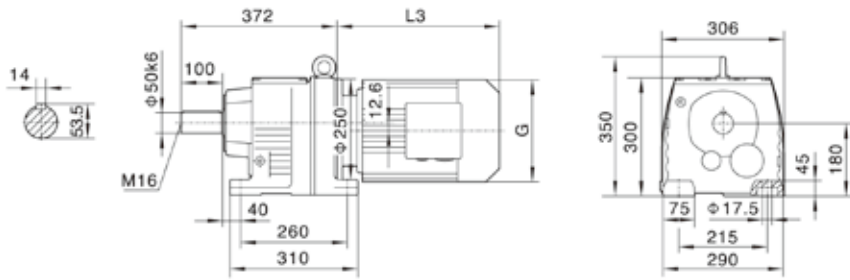


Customers provide the motor by themselves need connected flange.




RF87


Φ 300

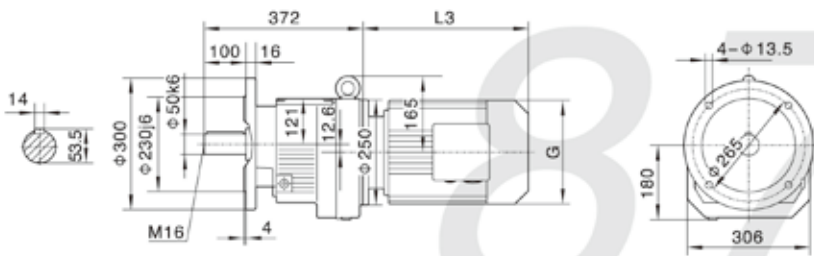


R..S87



Φ 350

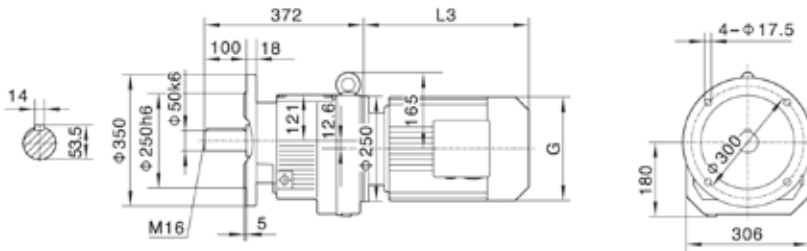

R..87R57

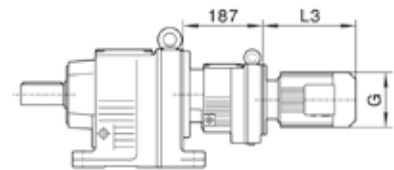


Note: For other values please refer to relevant structure.

Motor size	80		90S	90L	100		112M	132S	132M	160M	160L	180M	180L
Power/(kW)	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22
L3	246		280	304	350		380	425	461	524	547	583	616
G	175		195	195	215		240	275	275	330	330	380	380
L2	86		86	86	71		71	101	101	126	126	126	126


Note: "R.." means R, RF.



R97

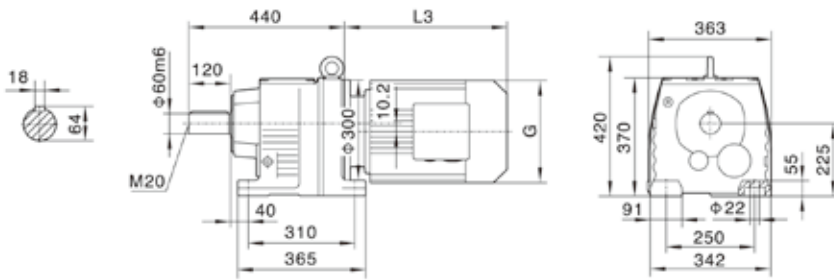


Customers provide the motor by themselves need connected flange.




RF97


Φ 350

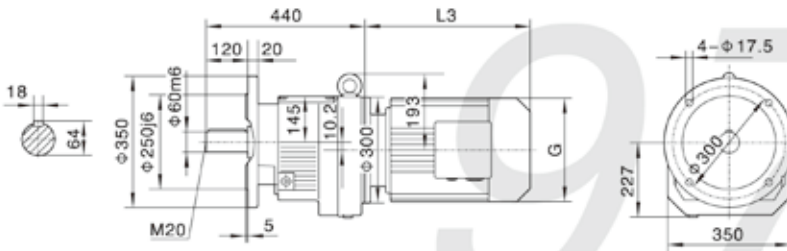


R..S97

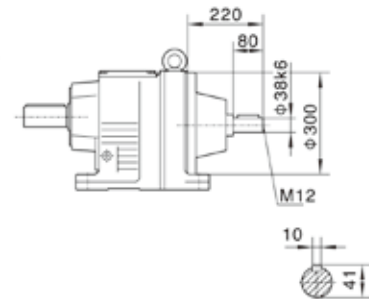

Φ 450

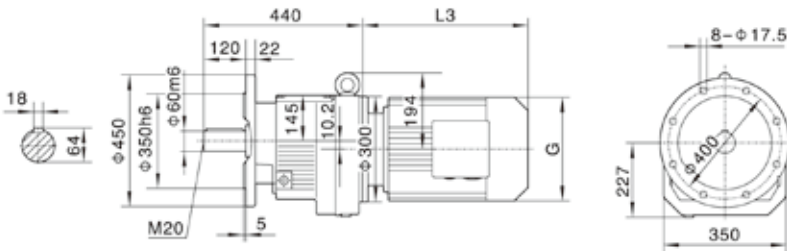

R..97R57

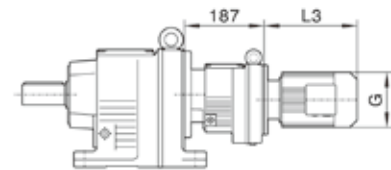


Note: For other values please refer to relevant structure.

Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200	
Power/(kW)	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30	
L3	246	280	304	315	334	425	461	524	547	555	588	654	
G	175	195	195	215	240	275	275	330	330	380	380	420	
L2	86	86	86	101	101	101	101	126	126	126	126	132	


Note: "R.." means R, RF.



R107

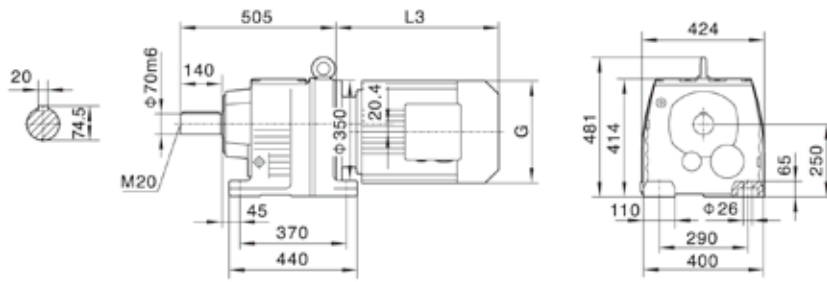


Customers provide the motor by themselves need connected flange.




RF107


Φ 350

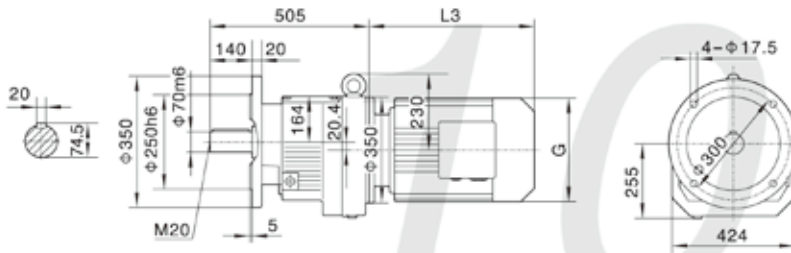


R..S107



Φ 450

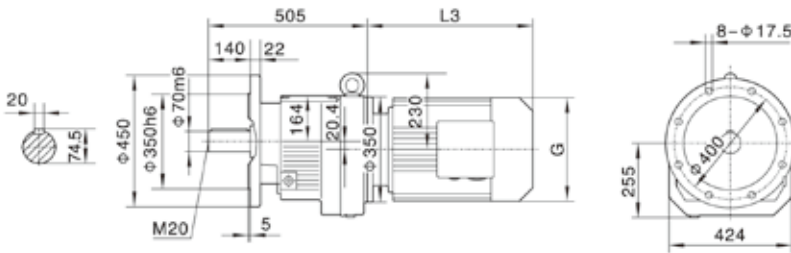

R..107R77

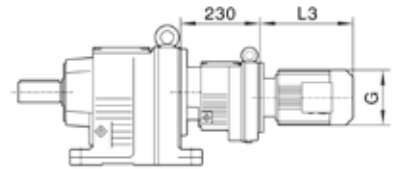


Note: For other values please refer to relevant structure.

Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M	
Power/(kW)	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45	
L3	318	334	386	422	504	519	555	588	654	680	702	
G	215	240	275	275	330	330	380	380	420	470	470	
L2	101	101	101	101	126	126	126	126	132	132	132	


Note: "R.." means R, RF.



R137

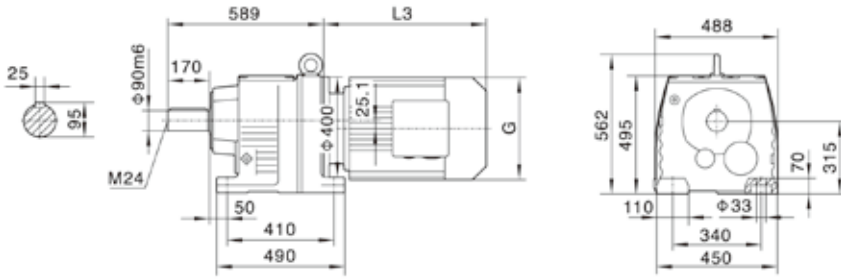


Customers provide the motor by themselves need connected flange.




RF137


Φ 450

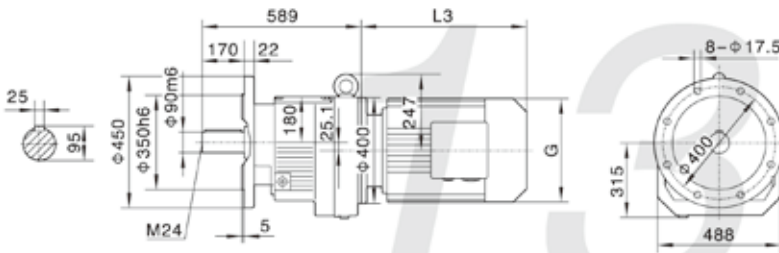


R..S137



Φ 550

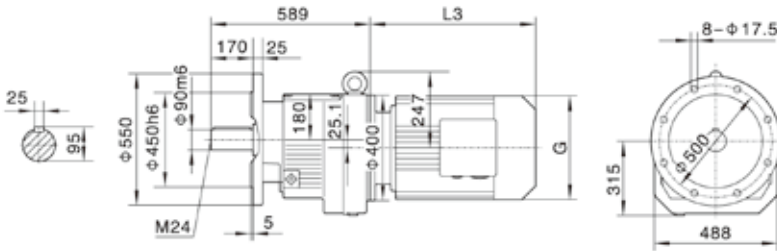

R..137R77

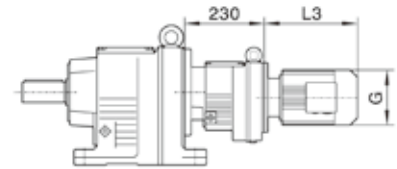

Note: For other values please refer to relevant structure.


Motor size	132S	132M	160M	160L	180M	180L	200	225S	225M	250	
Power/(kW)	5.5	7.5	11	15	18.5	22	30	37	45	55	
L3	388	424	476	519	555	588	654	680	702	771	
G	275	275	330	330	380	380	420	470	470	510	
L2	126	126	132	132	132	132	132	143	143	174	

Note: "R.." means R, RF.


R



R147

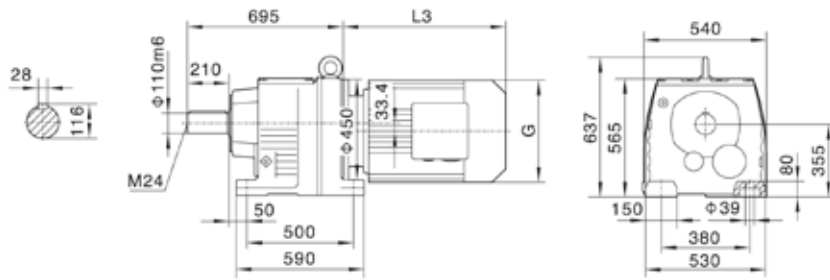


Customers provide the motor by themselves need connected flange.




RF147


Φ 450

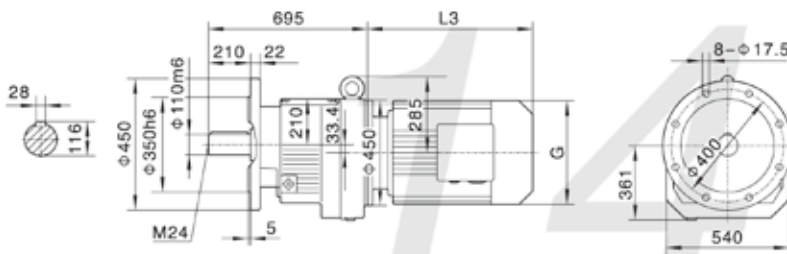


R..S147



Φ 550

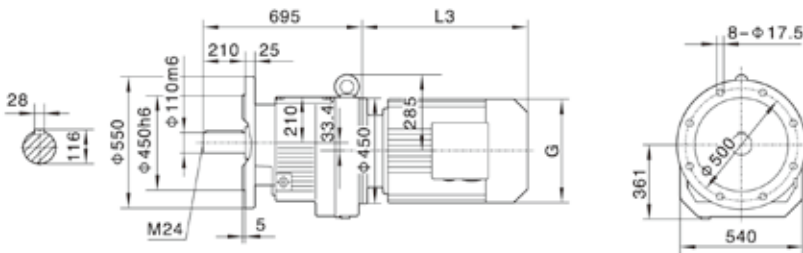

R..147R87(R77)

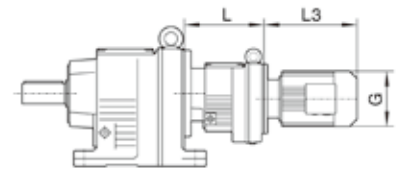

	R..147R77	R..147R87
L	230	275


Note: For other values please refer to relevant structure.

Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	
Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	
L3	567	602	583	616	654	674	696	775	845	845	
G	330	330	380	380	420	470	470	510	580	580	
L2	132	132	132	132	132	143	143	174	174	174	


Note: "R.." means R, RF.



R167

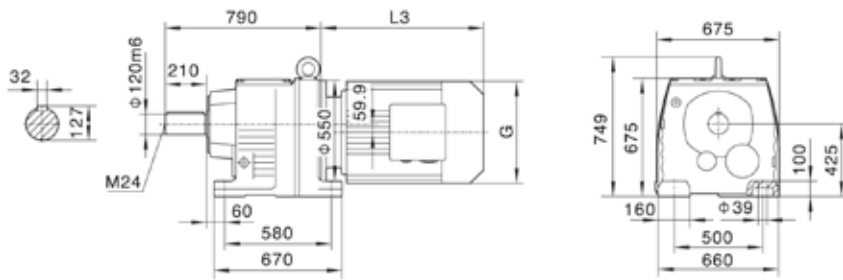


Customers provide the motor by themselves need connected flange.




RF167


Φ 550

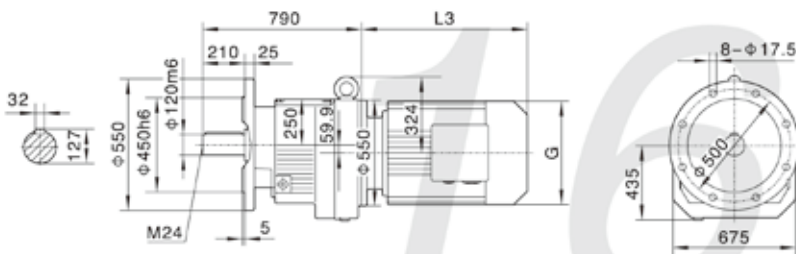


R..S167



Φ 660

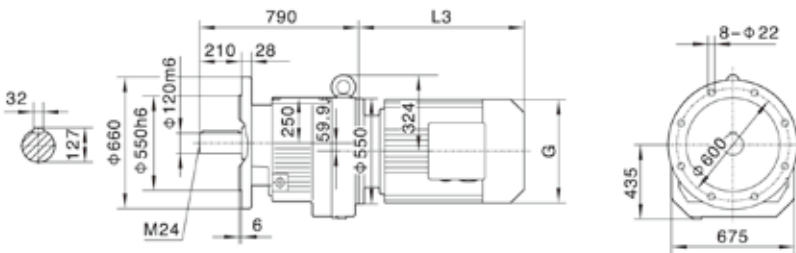

R..167R97(R107)

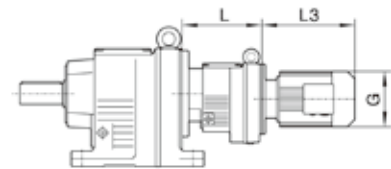


	R..167R97	R..167R107
L	320	370

Note: For other values please refer to relevant structure.

Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	567	602	635	666	642	669	691	770	828	879	1100	1130	1360
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	113	113	113	113	145	145

Note: "R.." means R, RF.

R

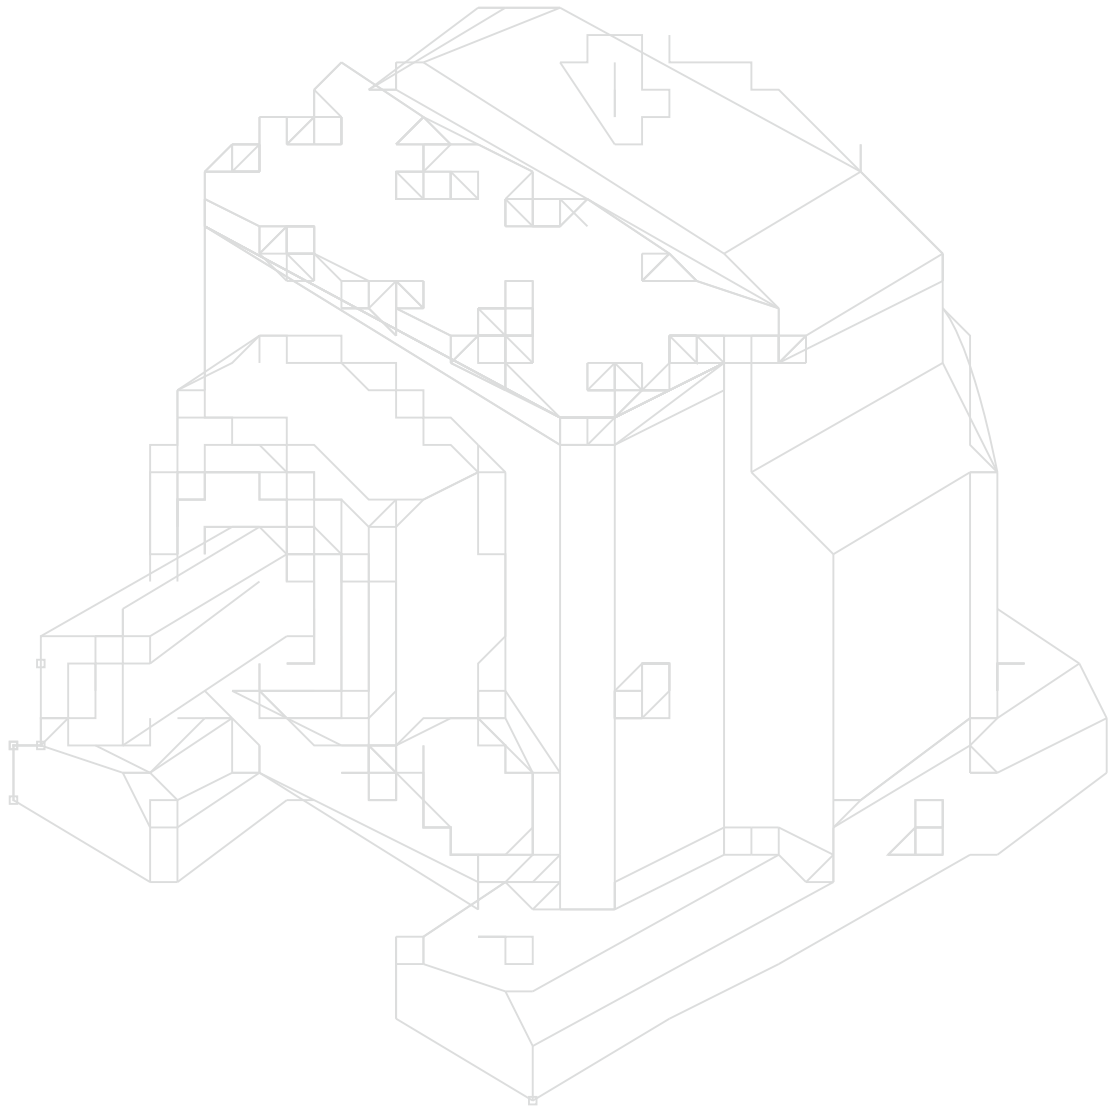

REDSUN

ZHEJIANG RED SUN MACHINERY CO.,LTD

Add: No. A07, North Side Of The 57 Provincial Road, Mabu Town, Wenzhou City, Zhejiang Province, China

Tel: +86-577-58113212 Fax: +86-577-58113207

E-mail: info@redsunrive.com

Web: www.cn-redsun.com