

COHM

Features of COHM Series

COHM 系列產品特性

- ◆ 扭力限制設計，防止因扭力過大使馬達燒毀，或扭力過大而損壞其機件。
Torque limitation design: to prevent motor from burning or other parts from damaging by over-large torque.
- ◆ 已調整扭力限制，至適當扭力限制大小。
The torque limitation already adjusted to proper value.
- ◆ 安裝方便，可任意方向安裝。
Fixing holes are attached. The reducer can be installed in any direction.
- ◆ 體積小，效率高，扭力大，壽命長，減速比高。
Small volume, high efficiency, large torsion, long lifetime, high reduction ratio.



Indication of Model Numbers

機種型號表示



COHM	50	100	1/4	TB
減速機型 Type	型號 Model	減速比 Ratio	馬力 Horse Power	馬達種類 Motor Type
COHM	50 60	100 ~ 400 200 ~ 300	1/4HP 1/2HP (4P)	T: 三相馬達 3 Phase TB: 三相剎車 3 Phase Brake

- ◆ COHM 限用 4P 三相馬達。
Please use 4 Pole Motor.
- ◆ 如需其他減速比，請與我們連絡。
For special ratio, please contact us.
- ◆ 本目錄所記載之減速比為公稱減速比，實際減速比非正整數，如需實際減速比請與我們連絡。
The reduction ratio recorded in this catalogue is the nominal reduction ratio, and the actual reduction ratio is not a positive integer. If you need the actual reduction ratio, please contact us.

MODEL : COHM50

RATIO : 100, 200, 300, 400

型號 Model	馬力 HP (4P)	重量 Weight (kg)	油量 Oil (ℓ)
50	1/4	13	0.5

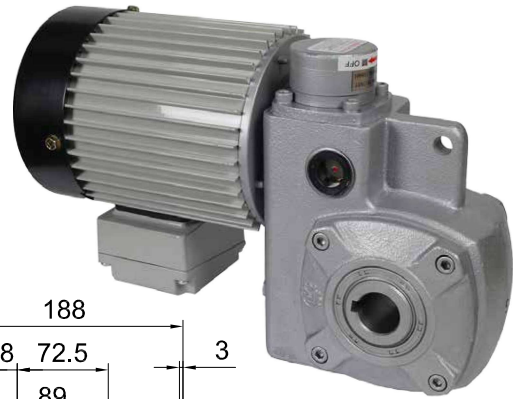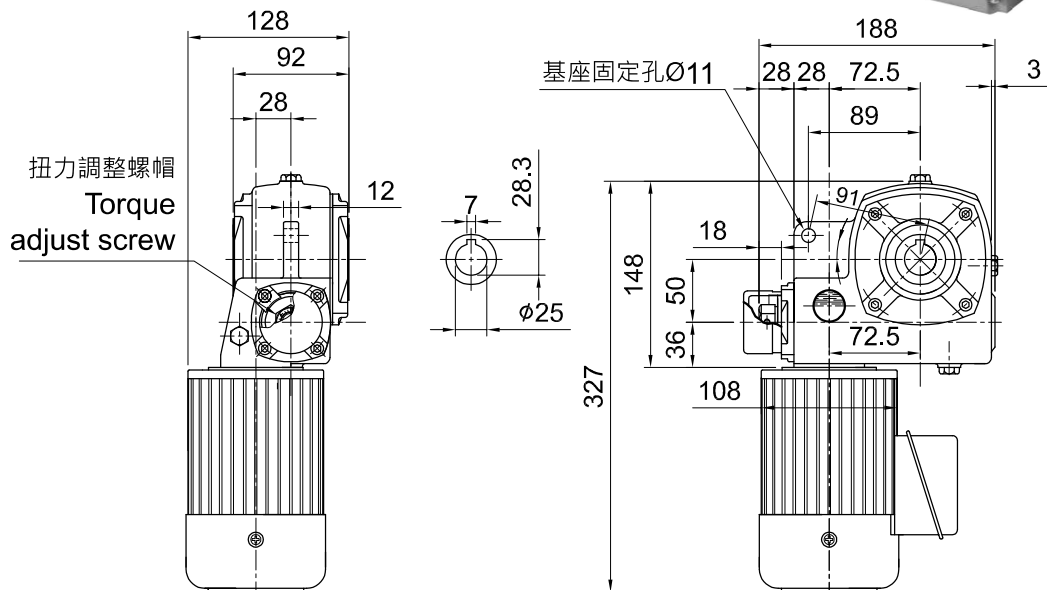

MODEL : COHM60

RATIO : 200, 300, 400

型號 Model	馬力 HP (4P)	重量 Weight (kg)	油量 Oil (ℓ)
60	1/2	18	0.8

