

L-出力軸左方圖
Output Shaft in the Left


GA型渦輪減速馬達

Worm Gear Reducer with Motor


GA U 40 - 60 A B ☐

L-左出力軸 Output Shaft in the Left
R-右出力軸 Output Shaft in the Right
B-附電磁剎車 With Electromagnetic Brake
T-附端子箱 With Terminal Box
A-單相 Single Phase 100V~110V
C-單相 Single Phase 200V~220V
S₂: 三相 220V, S₃: 三相 220/380V, S₄: 三相 220/440V
減速比 Gear Ratio 5, 10, 15, 20, 30, 40, 50, 60
馬力 HP 40W, 60W, 90W, 100W, 200W
U: 無段變速馬達 Variable Speed Control Motor
I: 連續運轉馬達 Induction Motor
R: 定格30分馬達 Reversible Motor
D: 直流馬達 DC Motor
渦輪代號 Worm Gear Type

出力軸 Output Shaft

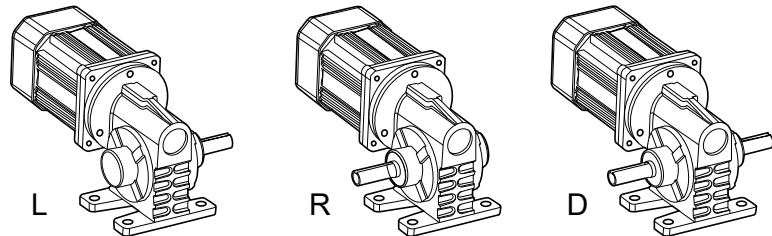

尺寸圖 Dimension Chart

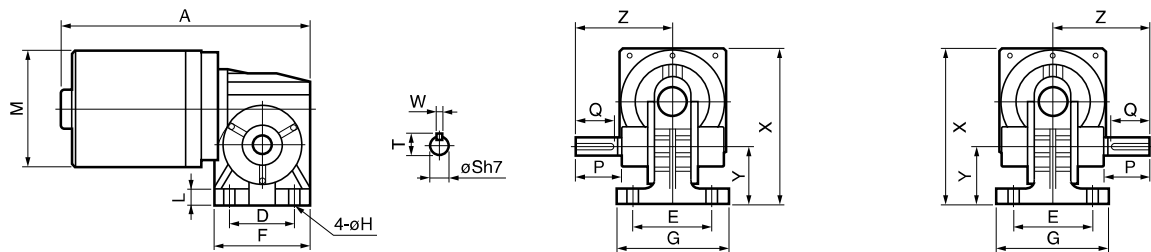

R-出力軸右方圖
Output Shaft in the Right

L-出力軸左方圖
Output Shaft in the Left

GA尺寸表 Dimensions

型 號 Model No.	減速比 Gear Ratio	A	D	E	F	G	H	L	M	X	Y	Z		出力軸端 Output Shaft							渦座 重量 (Kg)
												L	R	P		Q	S	T	W		
														L	R						
GAI-40-□-□	1/5-1/60	198 (248)	50	60	75	87	9	10	90	118	43.5	78	77	41	40	30	14	16.5	5	配 小 渦 座 1.8	
GAI-60-□-□	1/5-1/60	230 (288)	50	60	75	87	9	10	90	118	43.5	78	77	41	40	30	14	16.5	5		
GAI-90-□-□	1/51/60	270 (330)	65	90	92.8	112	10	10	90	146	56.5	96	94	53	51	40	16	18.5	5	配 大 渦 座 3.5	
GAI-100-□-□	1/5-1/60	255 (300)	65	90	92.8	112	10	10	126	161	56.5	96	94	53	51	40	16	18.5	5		
GAI-200-□-□	1/5-1/60	285 (330)	65	90	92.8	112	10	10	126	161	56.5	96	94	53	51	40	16	18.5	5		

()為附剎車尺寸

() Numbers shown the dimension of the brake

以上數值若有變動，恕不另行通知 We reserve the right to change without further notice.